






REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09	~	

NOTES:

- SPECIFICATIONS
 - Current Rating: 1.0A
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 20mΩ Max
 - Operating Temperature: -40°C to +105°C
- MATERIALS:
 - Housing: Thermoplastic(UL94 V-0)
 - Contact: Copper alloy

3.PRODUCT NUMBER CODE:
DS1065-11 - X X X X X

- PACKING TYPE
T:TRAY
R:TAPE ON REEL
B:TUBE
- PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
- No.OF CONTACTS
2*2-2*40

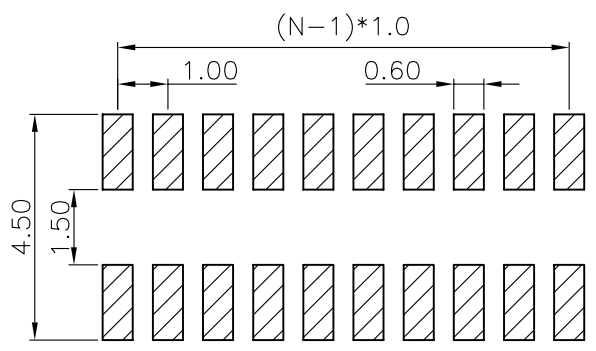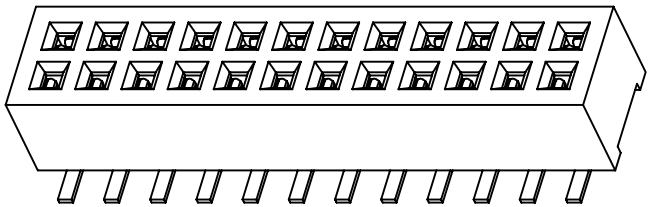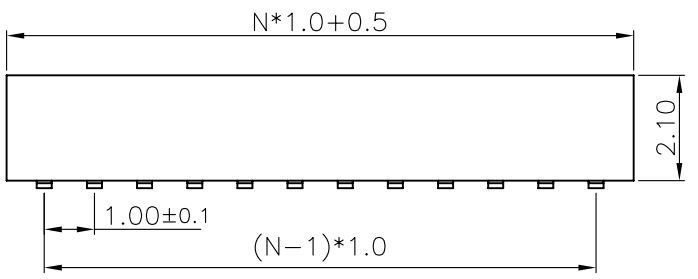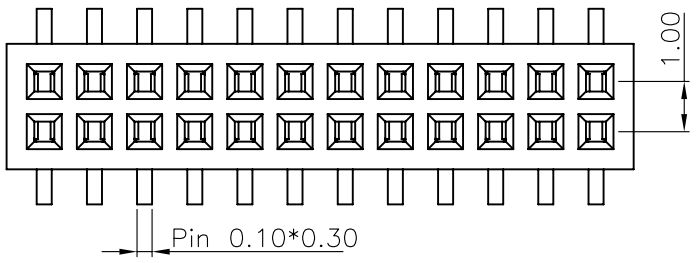

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	1.0mm FEMALE HEADER SMT TYPE W/O POST	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-11	
.XX	±0.25	.XX	±2°					
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1065-11-XXXXX						

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/24/09	~	

NOTES:

1. SPECIFICATIONS

- . Current Rating: 1.0A
- . Insulation Resistance: 500MΩ Min
- . Dielectric Withstanding: 300V AC
- . Contact Resistance: 20mΩ Max
- . Operating Temperature: -40°C to +105°C





2. MATERIALS:

- . Housing: Thermoplastic(UL94 V-0)
- . Contact: Copper alloy


3. PRODUCT NUMBER CODE:

DS1065-12 - X X X X X

- PACKING TYPE
T:TRAY
R:TAPE ON REEL
B:TUBE
- PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
0: SELECTIVE GOLD FLASH
- No.OF CONTACTS
2*2-2*40

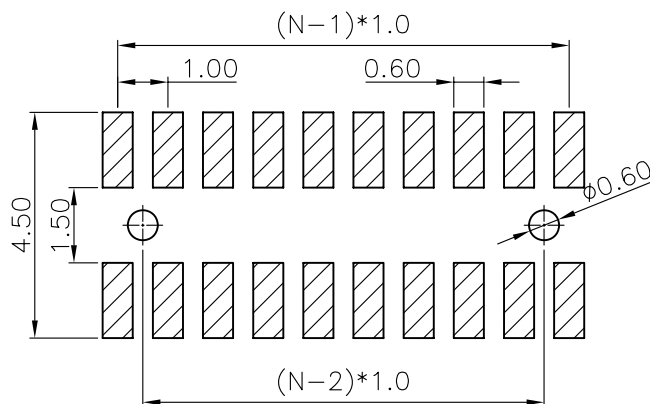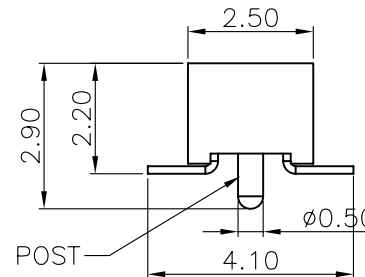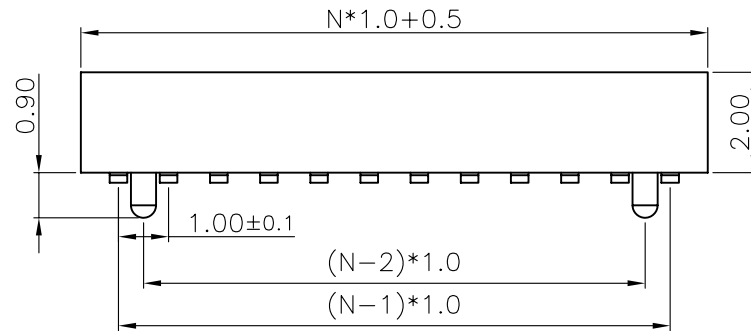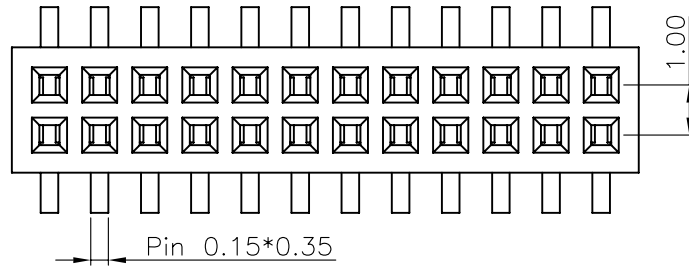

RECOMMEND PCB LAYOUT(TOLERANCE ±0.05)

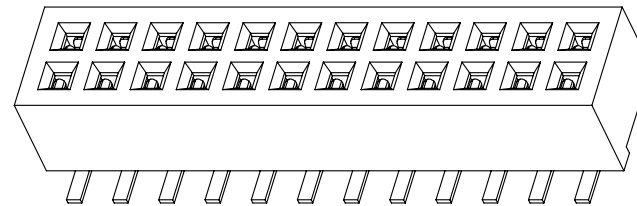

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 1.00mm				
X.	±0.60	X.	±5°	UNITS	mm		SMT TYPE W/POST				
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1065-12				
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD							
SCALE		1:1						SHEET		1 OF 1	
DRAWING NO.		C-DS1065-12-XXXXX									