


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/12'	~	



N=No. OF Signal CONTACTS

N=No. OF Power CONTACTS

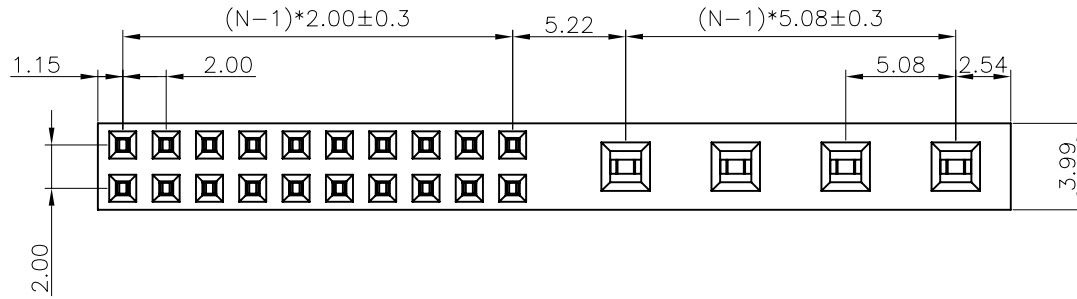

NOTES:

- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE: -45°C~+110°C.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V AC.
 - INSULATION RESISTANCE:1000MΩ min.
 - CONTACT RESISTANCE:20mΩ max.
 - CURRENT RATING:6A 30°C TEMPERATURE RISE.
- PART NUMBER: DS1024-15
- PRODUCT NUMBER CODE:
DS1024-15 - X X X X

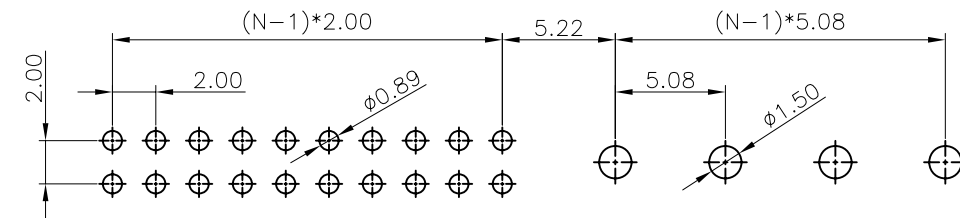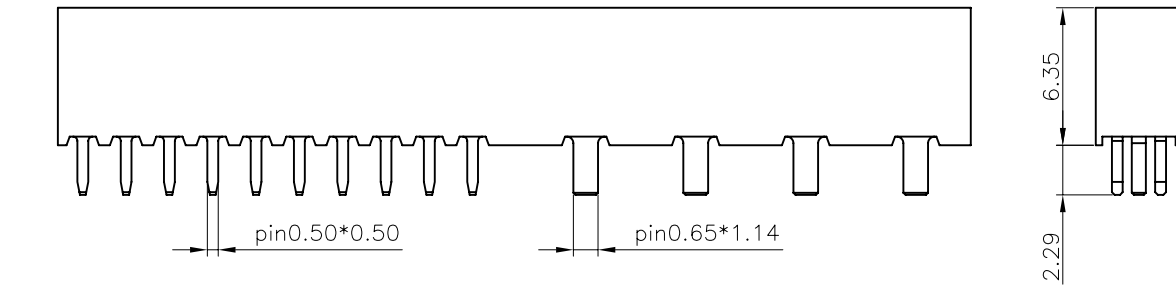


RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

- CONTACT PLATING
 - 8: FULL GLOD FLASH
 - 0: SELECTIVE GLOD FLASH
 - 6: FULL TIN FLASH
- HOUSING COLOR
 - B: BLACK
- No. OF Power CONTACTS
1*2 - 1*4
- No. OF Signal CONTACTS
2*2 - 2*39




GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	FEMALE HEADER PITCH 5.08mm COMBINATION
X.	±0.60	X.	±5°	UNITS	mm		FEMALE HEADER PITCH 2.00mm V/T TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1024-15 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER						
SCALE	~	SHEET	1 OF 2				
DRAWING NO.	C-DS1024-15-2*X-1*X-XXX						

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/12'	~	

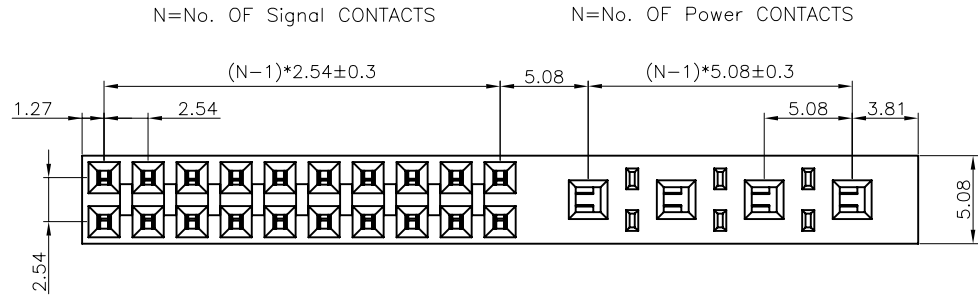

NOTES:

- MATERIAL
 - INSULATOR MATERIAL: THERMOPLASTIC (UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE: -45°C ~ +110°C.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V AC.
 - INSULATION RESISTANCE: 1000MΩ min.
 - CONTACT RESISTANCE: 20mΩ max.
 - CURRENT RATING: 8A 30°C TEMPERATURE RISE.
- PART NUMBER: DS1024-14
- PRODUCT NUMBER CODE:
DS1024-14 - X X X X

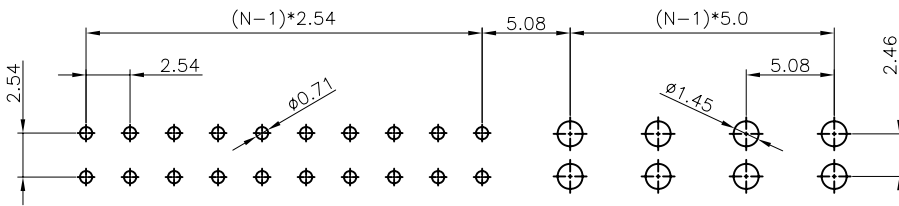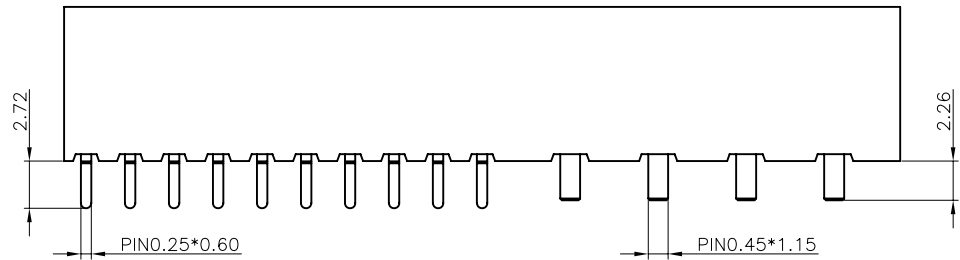


- CONTACT PLATING
 - 8: FULL GLOD FLASH
 - 0: SELECTIVE GLOD FLASH
 - 6: FULL TIN FLASH
- HOUSING COLOR
 - B: BLACK
- No. OF Power CONTACTS
 - 1*2 - 1*4
- No. OF Signal CONTACTS
 - 2*2 - 2*24

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		FEMALE HEADER PITCH 5.08mm COMBINATION
.X	±0.38	.X	±3°	mm	FEMALE HEADER PITCH 2.54mm V/T TYPE
.XX	±0.25	.XX	±2°	SHEET SIZE	A4
DRAWING TYPE		CUSTOMER		SERIES	DS1024-14 SERIES
SCALE		SHEET		1 OF 2	
DRAWING NO.		C-DS1024-14-2*X-1*X-XXX			

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/08/12'	~	

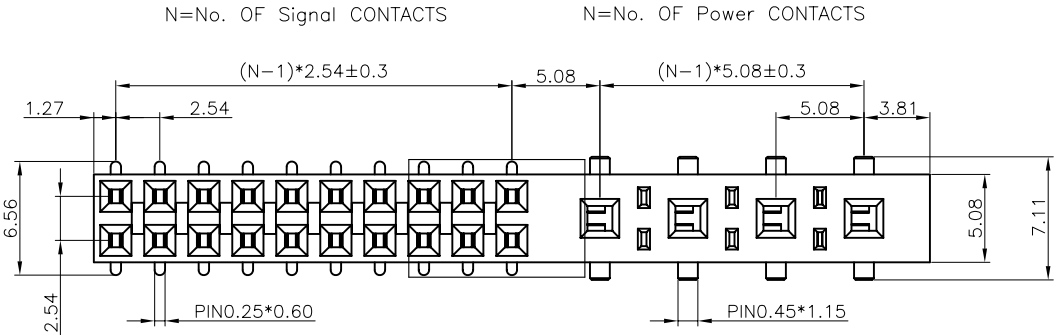

- NOTES:
- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
 - SPECIFICATION
 - TEMPERATURE: -45°C~+110°C.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V AC.
 - INSULATION RESISTANCE:1000MΩ min.
 - CONTACT RESISTANCE:20mΩ max.
 - CURRENT RATING:8A 30°C TEMPERATURE RISE.
 - PART NUMBER: DS1024-13
 - PRODUCT NUMBER CODE:

DS1024-13 - X X X X X X X

- PACKING TYPE
T:TRAY
R:TAPE ON REEL
B:TUBE
- PICK UP SUPPORT
S:W/
X:W/O
- LOK SUPPORT
S: W/
X: W/O
- CONTACT PLATING
8: FULL GLOD FLASH
0: SELECTIVE GLOD FLASH
6: FULL TIN FLASH
- HOUSING COLOR
B: BLACK
- No. OF Power CONTACTS
1*2 - 1*4
- No. OF Signal CONTACTS
2*2 - 2*24

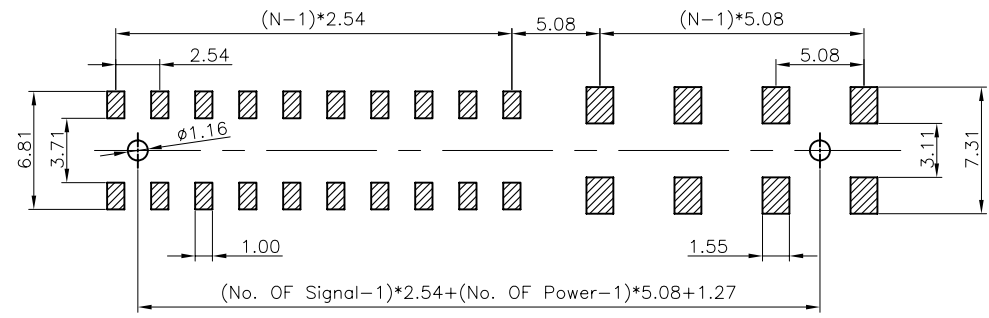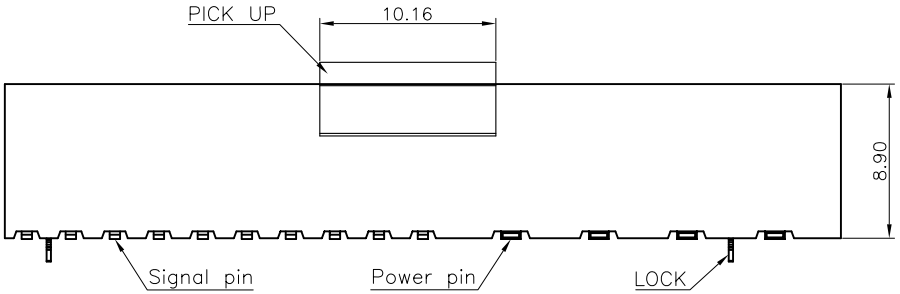


RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	FEMALE HEADER PITCH 5.08mm COMBINATION	
UNITS	mm	FEMALE HEADER PITCH 2.54mm SMT TYPE	
SHEET SIZE	A4	SERIES	DS1024-13 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	~	SHEET	1 OF 2
DRAWING NO.	C-DS1024-13-2*X-1*X-XXX		

 **晨翔电子有限公司**
CONNFLY CONNFLY ELECTRONIC CO. LTD