

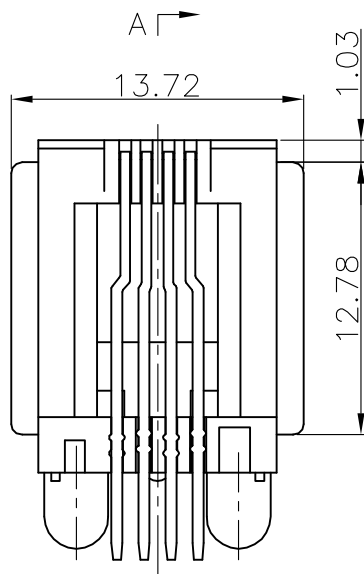


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 06/22/10'	~	

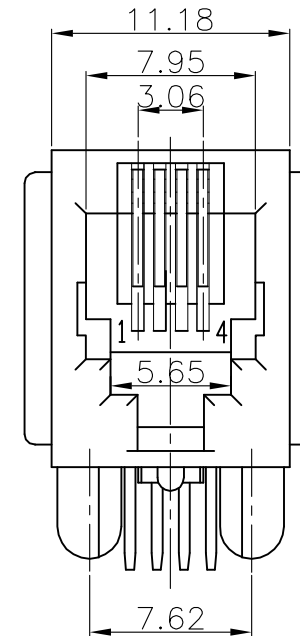

A L

A - A

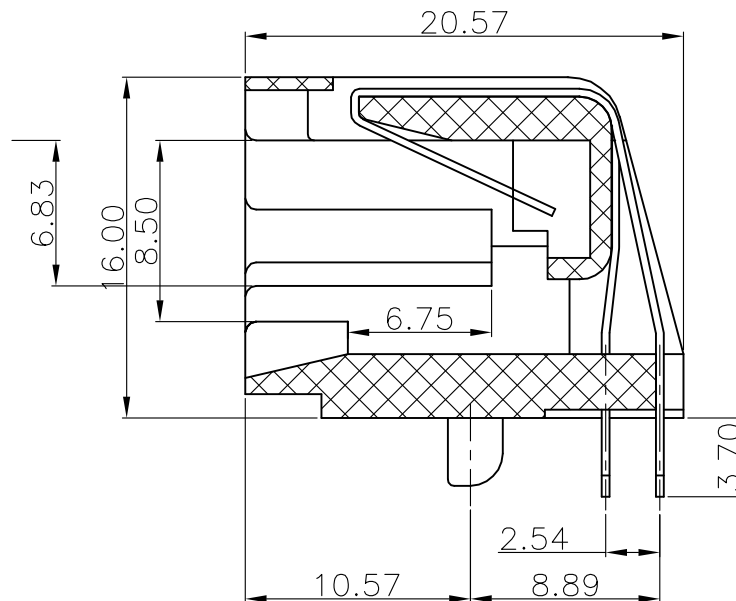


SPECIFICATION



1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Contact Resistance: 50mΩ Max.
5. Product Number Code:


DS1132-03-X X X X X

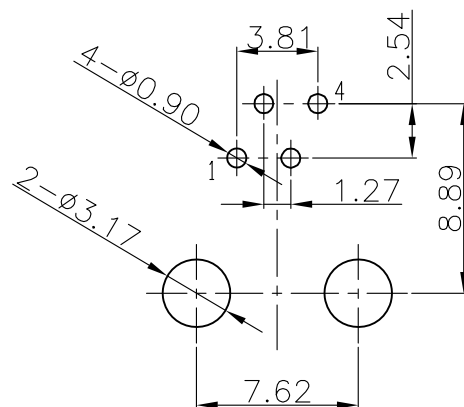Ear Support
 S:W/ Ear
 X:W/O Ear
 Housing Color
 B:Black A:Gray
 Contact Plating
 0:Gold Flash
 3:Selective 3u" Gold
 (6;15;30)Micro Inch
 No.Of Contacts
 4:4P4C
 Connector Type
 S:Socket



RECOMMEND PCB LAYOUT
TOLERANCE=±0.05mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PCB JACK 4p	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1132-03 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		<div><div>晨翔电子有限公司</div><div>CONNFLY ELECTRONIC CO. LTD</div></div>			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1132-03-XXXX					

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/06/10'		

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Product Number Code:

DS1132-02-X X X X X

DS1132-02-X X X X X
└─ Lenght Dim. L
320:320mm
230:230mm

- Length Dim. L
 - 320:320mm
 - 230:230mm

320:320mm

230:230mm

- Housing Color
B:Black
A:Gray

B:Black

A:Gray

- Contact Plating

0:Gold Flash


3:Selective 3u" Gold



- No.Of Contacts


4:4P4C

- Connector Type: S:Socket

S:Socket

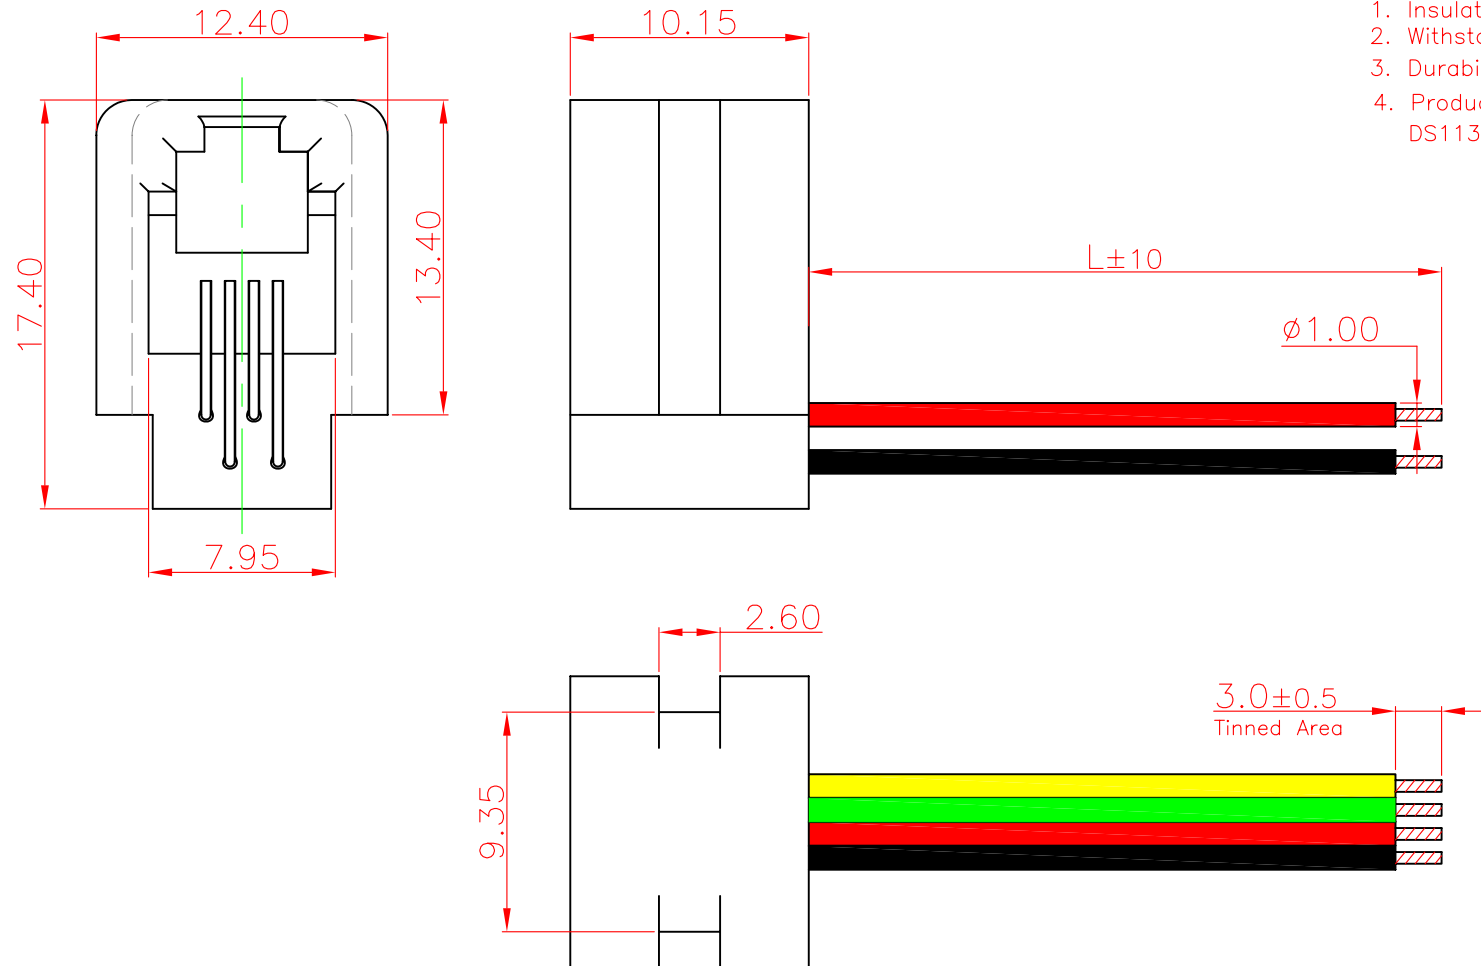

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X. ±0.60	X. ±5°			UNITS	mm	PCB JACK 4P4C W/ WIRE	
.X ±0.38	.X ±3°			SHEET SIZE	A4	SERIES	DS1132-02 SERIES
.XX ±0.25	.XX ±2°			 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER						
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1132-02-XXXXX						

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

CONNFLY CONNFLY ELECTRONIC CO. LTD

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/26/06'		

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Product Number Code:

DS1133-01-X X X X X X

Ear Support
S:W/ Ear
X:W/O Ear

Housing Materials
P:PBT
N:NYLON



Housing Color
B:Black

Contact Plating
0:Gold Flash
3:3u" Gold
6:6u" Gold
15:15u" Gold
30:30u" Gold



No.Of Contacts
4:6P4C
6:6P6C

Connector Type
S:Socket

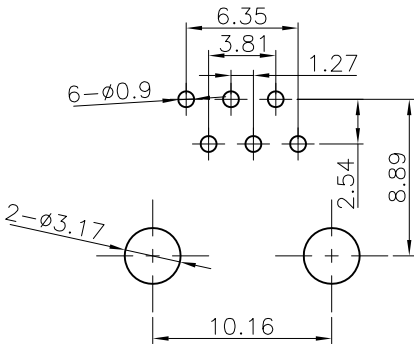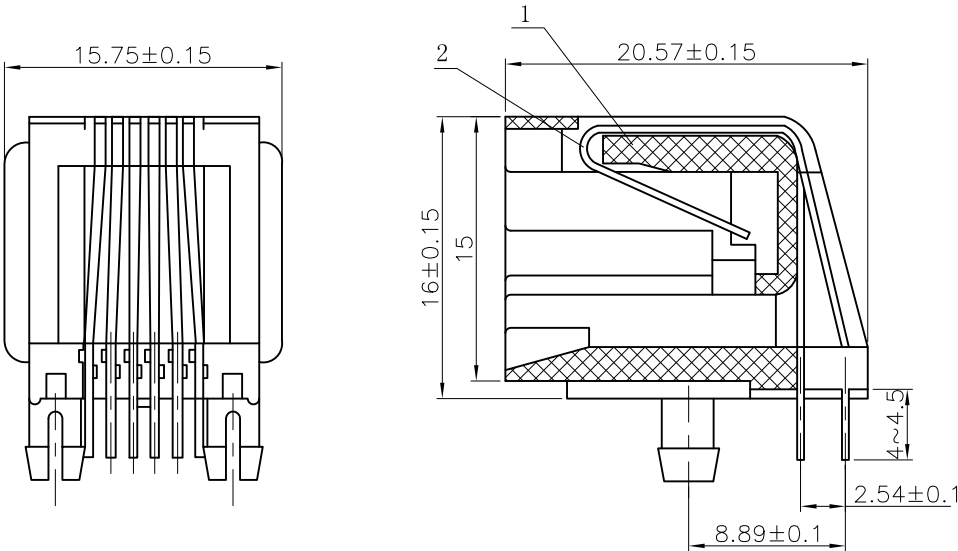Series No.
DS1133-01






RECOMMEND PCB LAYOUT
TOLERANCE=±0.05mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		PCB JACK 6P	
X.	±0.60	X.	±5°	UNITS	mm				
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1133-01 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER			<div><div>晨翔电子有限公司</div><div>CONNFLY CONNFLY ELECTRONIC CO. LTD</div></div>				
SCALE		1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1133-01-XXXXX							

(2)	PIN		PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	QTY	MATERAIL	REMARK

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 02/27/09'	~	

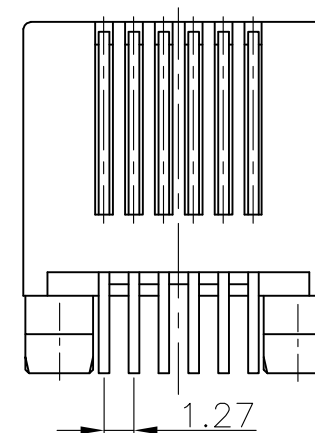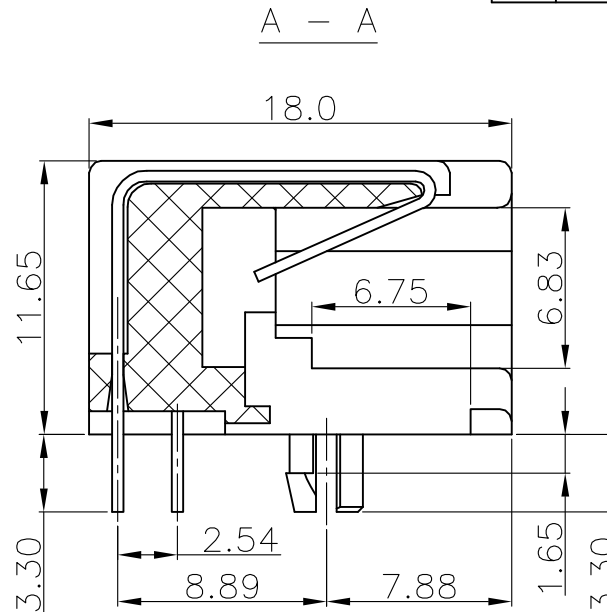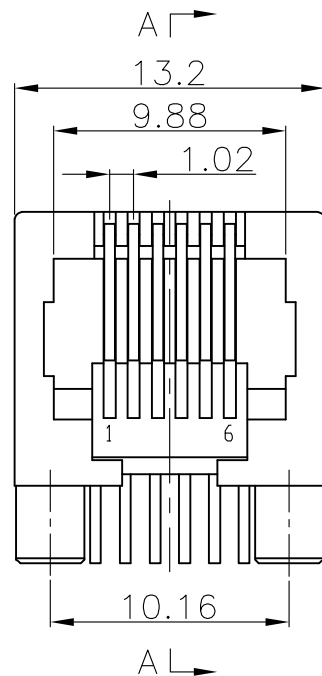


SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Contact Resistance: 50mΩ Max.
5. Product Number Code:



DS1133-03-X X X X X

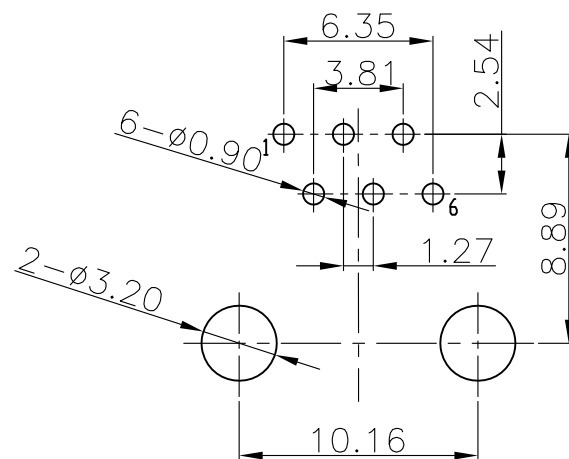- Ear, Support
- S:W/ Ear
- X:W/O Ear
- Housing Color
- A:Gray B:Black
- Contact Plating
- 0:Gold Flash
- 3:Selective 3u" Gold
- (6;15;30)Micro Inch
- No.Of Contacts
- 6:6P6C 4:6P4C
- Connector Type
- S:Socket






RECOMMEND PCB LAYOUT
TOLERANCE=±0.05mm

SECRET

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PCB JACK 6p	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1133-03 SERIES
.XX	±0.25	.XX	±2°	<div>晨翔电子有限公司</div> <div>CONNFLY CONNFLY ELECTRONIC CO. LTD</div>			
DRAWING TYPE		CUSTOMER					
SCALE		1:1	SHEET				
DRAWING NO.		C-DS1133-03-XXXX					

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/17/09'	~	

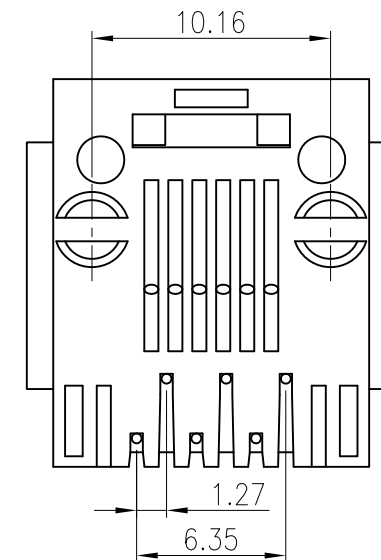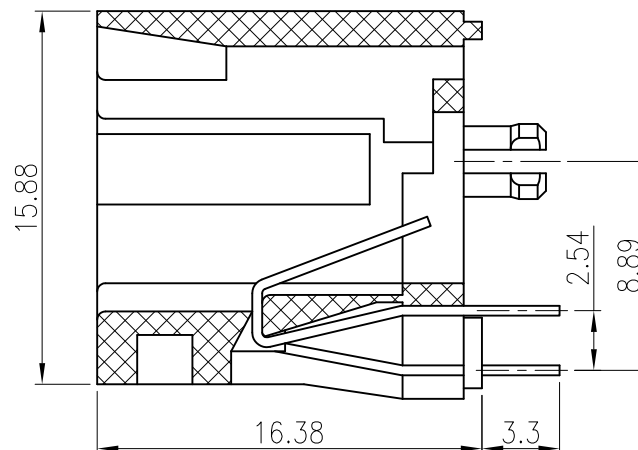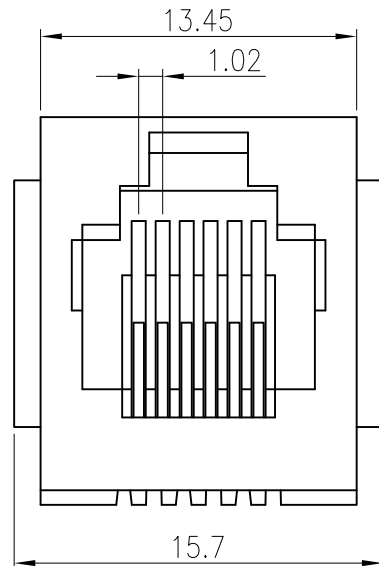


SPECIFICATION



1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Contact Resistance: 50mΩ Max.
5. Product Number Code:

DS1133-02-X X X X X

Ear support
 S:W/ ear
 X:W/O ear
 Housing Color
 B:Black
 A:Gray
 Contact Plating
 0:Gold Flash
 3:Selective 3u" Gold
 (6;15;30)Micro Inch
 No.Of Contacts
 6:6P6C 4:6P4C
 Connector Type
 S:Socket

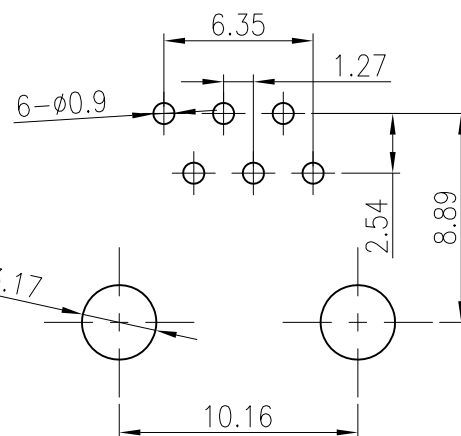

RECOMMEND PCB LAYOUT
TOLERANCE=±0.05mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		PCB JACK 6p		
X.	±0.60	X.	±5°	UNITS	mm	Vertical Through Type				
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1133-02 SERIES			
.XX	±0.25	.XX	±2°							
DRAWING TYPE		CUSTOMER			晨翔电子有限公司					
SCALE		1:1	SHEET							1 OF 1
DRAWING NO.		C-DS1133-02-XXXXX								
				CONNFLY CONNFLY ELECTRONIC CO. LTD						



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/26/06'		

SPECIFICATION




1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Product Number Code:

DS1134-04-X X X X X

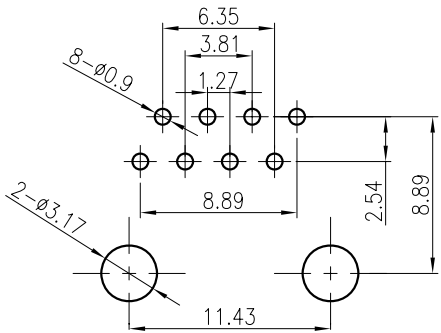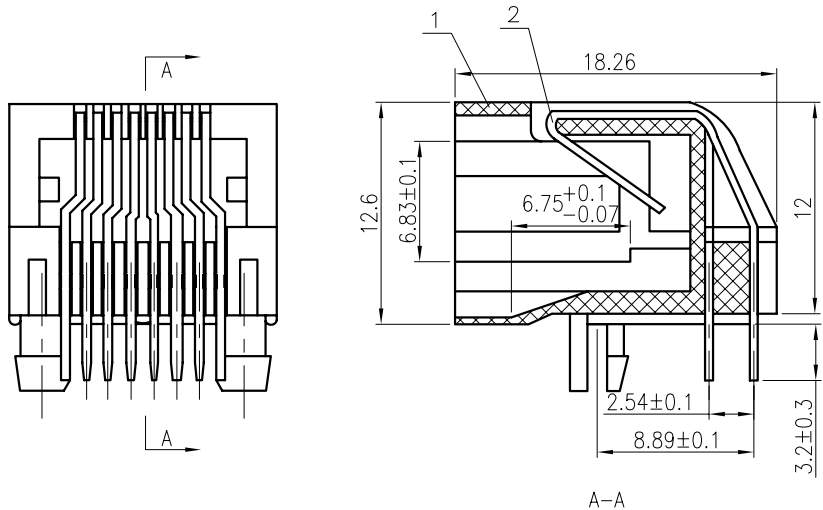
Housing Materials
P:PBT
N:NYLON
Housing Color
B:Black
Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
No.Of Contacts
8:8P8C
Connector Type
S:Socket
Series No.
DS1134-04



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

					GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB JACK 8P	
					X. ±0.60 .X ±0.38 .XX ±0.25		X. ±5° .X ±3° .XX ±2°		UNITS	mm			
									SHEET SIZE	A4	SERIES	DS1134-04 SERIES	
(2)	PIN		PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL	DRAWING TYPE	CUSTOMER			 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2	SCALE	1:1	SHEET	1 OF 1					
No.	PART NAME	Q'TY	MATERAIL	REMARK	DRAWING NO.	C-DS1134-04-XXXXXX							

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/24/06'	~	LJC 06/24/06'
B	ADD BLACK	YCH 07/27/07'	~	

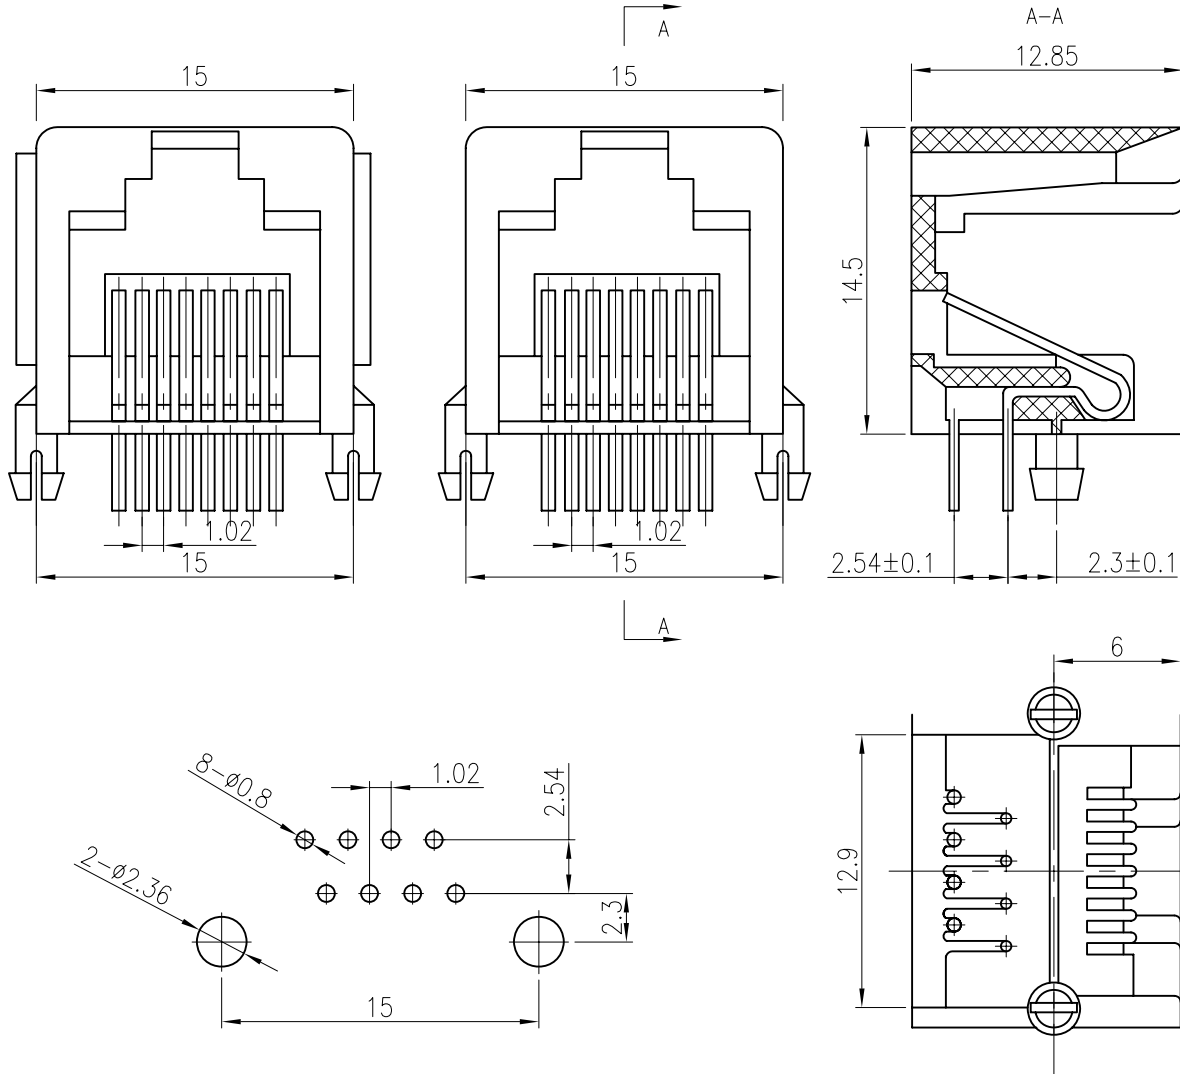

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Product Number Code:

DS1134-X X X X X X

- Ear Support
 - S:W/ Ear
 - X:W/O Ear

—Housing Materials
P:PBT
N:NYLON

- Housing Color
 - A:Grey
 - B:Black



— Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch

— No.Of Contacts
8:8P8C

- Connector Type
S:Socket

— Series No.
DS1134


RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB JACK 8P	
X. ±0.60	X. ±5°			UNITS	mm			
.X ±0.38	.X ±3°			SHEET SIZE	A4	SERIES	DS1134 SERIES	
.XX ±0.25	.XX ±2°			 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE	CUSTOMER							
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.	C-DS1134-XXXXX							



晨翔电子有限公司





CONNFLY CONNFLY ELECTRONIC CO. LTD

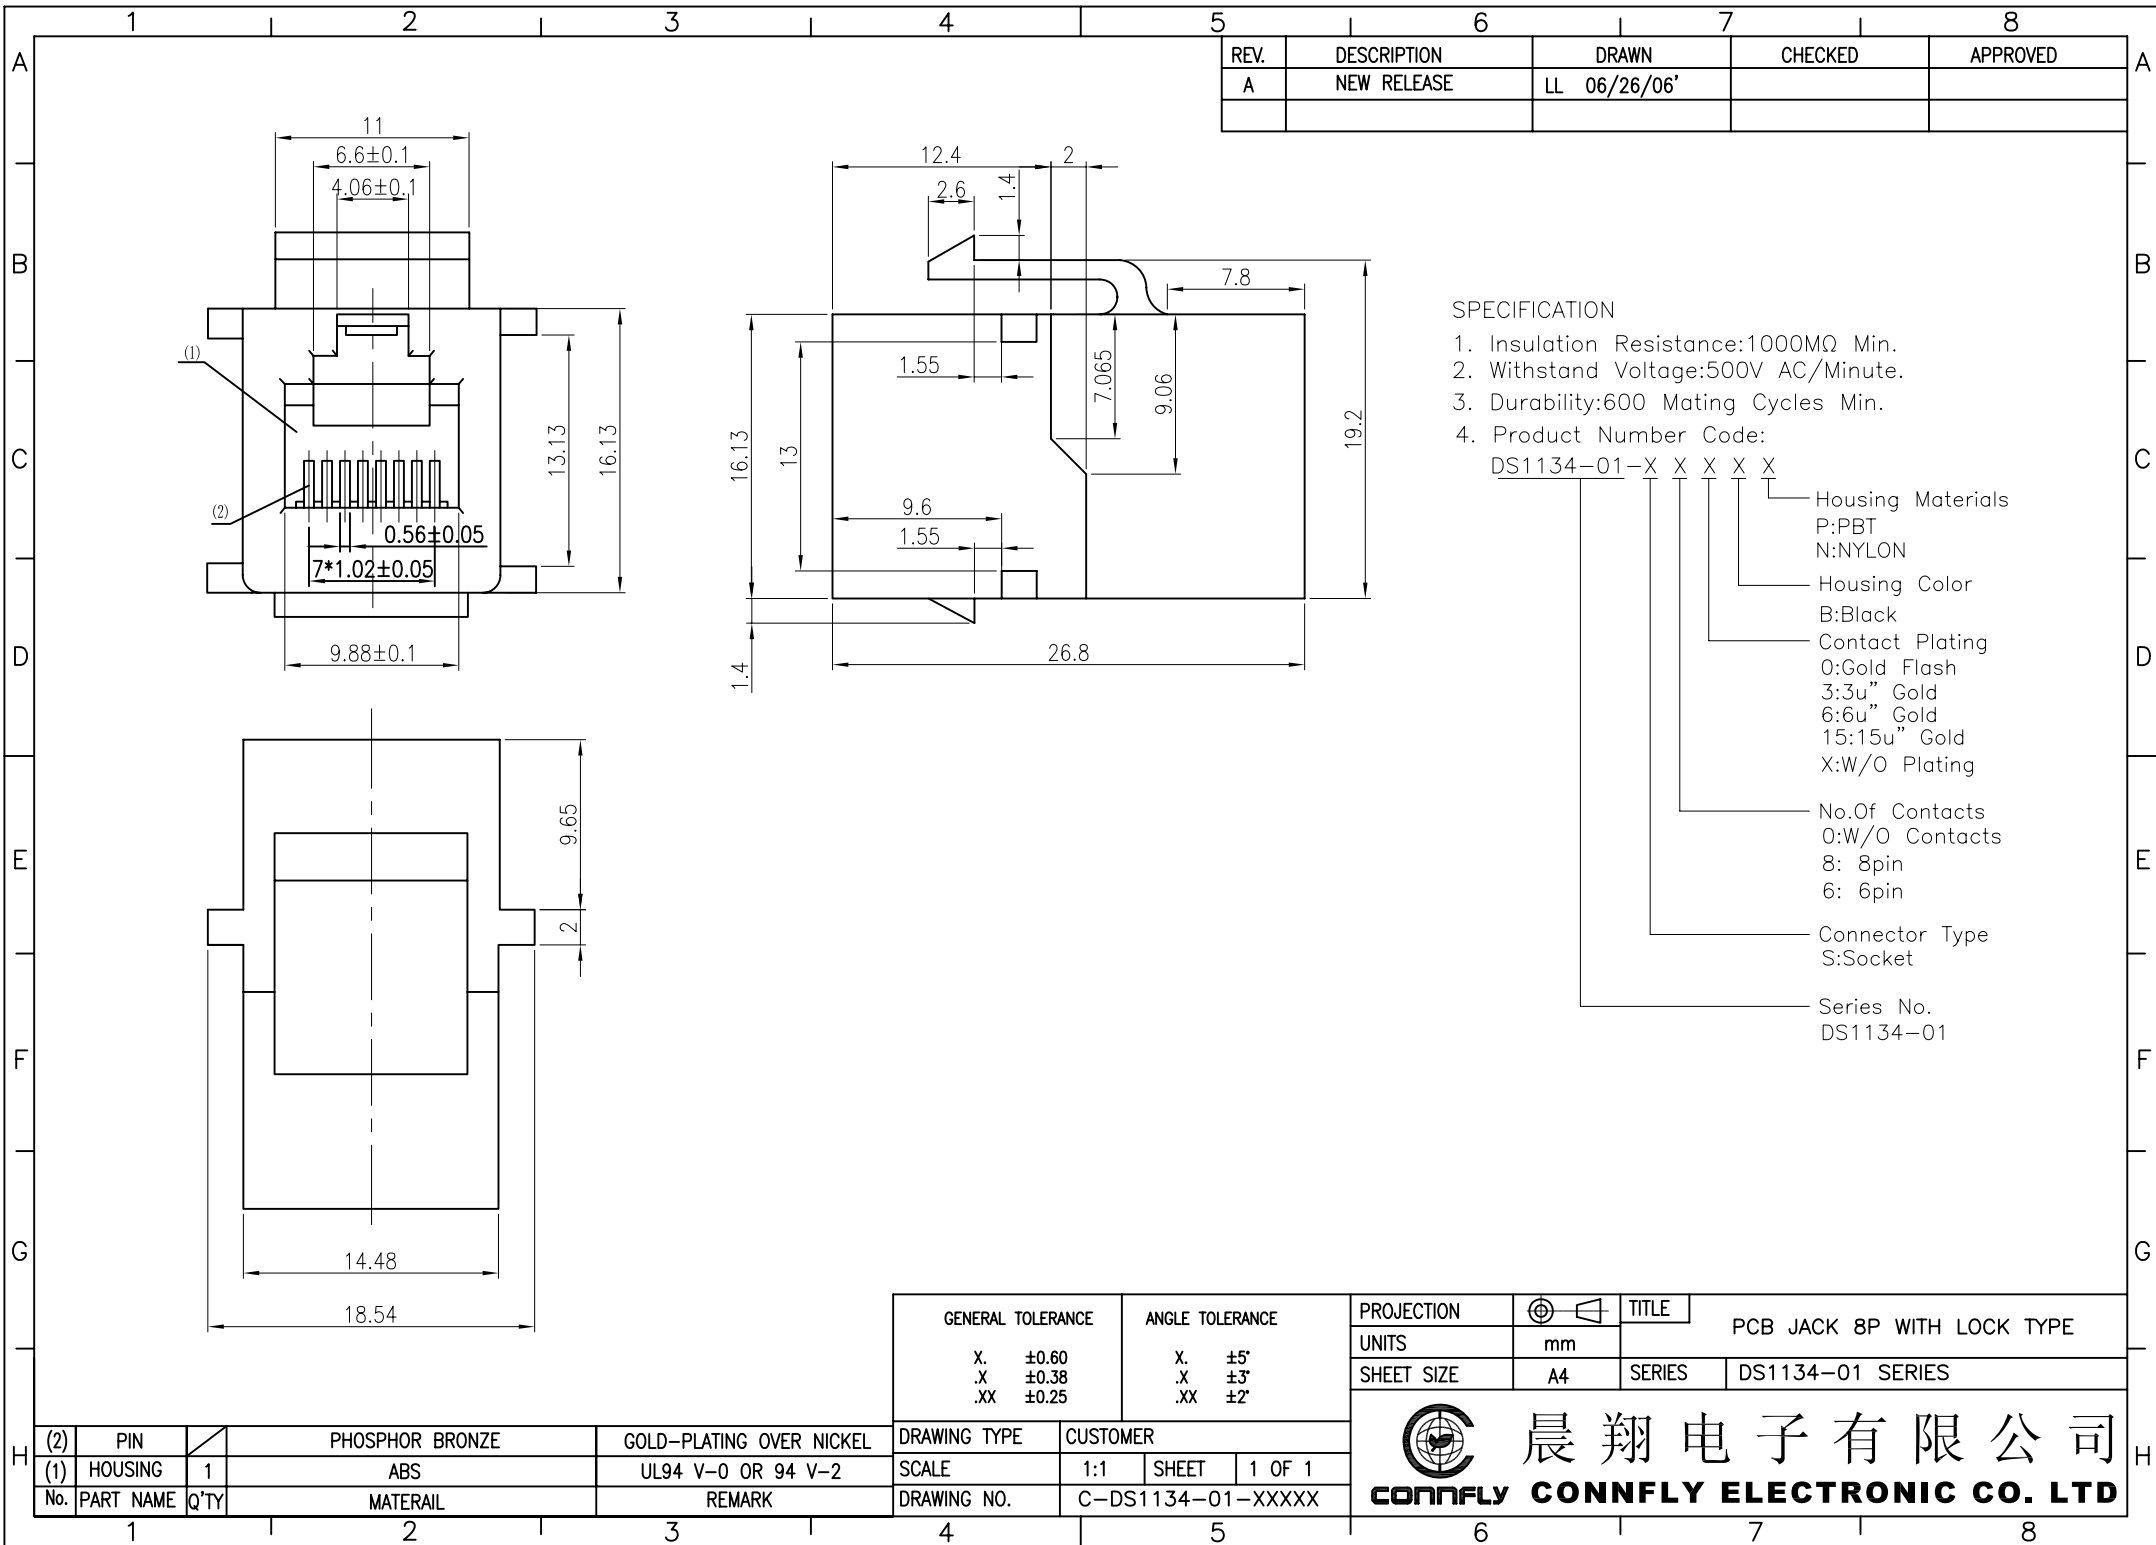

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/26/06'		

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Mating Cycles Min.
4. Product Number Code:
DS1134-03-X X X X X X
- └ Ear Support
S:W/ Ear
X:W/O Ear
- └ Housing Materials
P:PBT
N:NYLON
- └ Housing Color
B:Black
- └ Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
- └ No.Of Contacts
8:8P8C
- └ Connector Type
S:Socket
- └ Series No.
DS1134-03

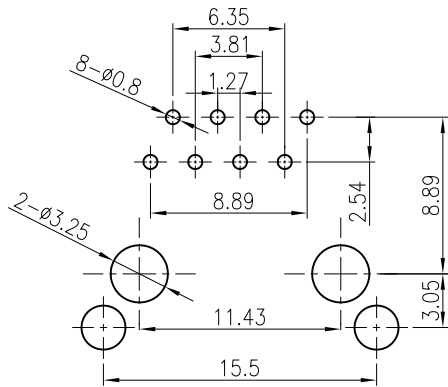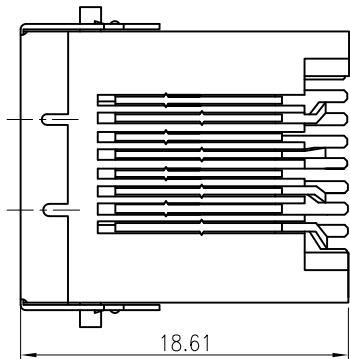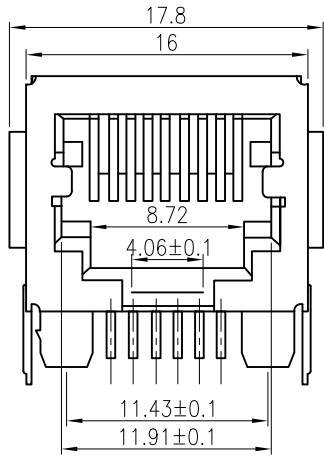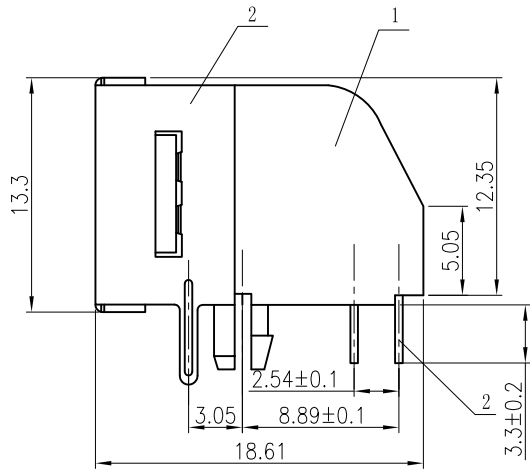



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.25MM THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	QTY	MATERAIL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1134-03-XXXXXX	



PROJECTION		TITLE
UNITS	mm	PCB JACK 8P WITH SHIELDING TYPE
SHEET SIZE	A4	SERIES DS1134-03 SERIES

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 03/26/06'		

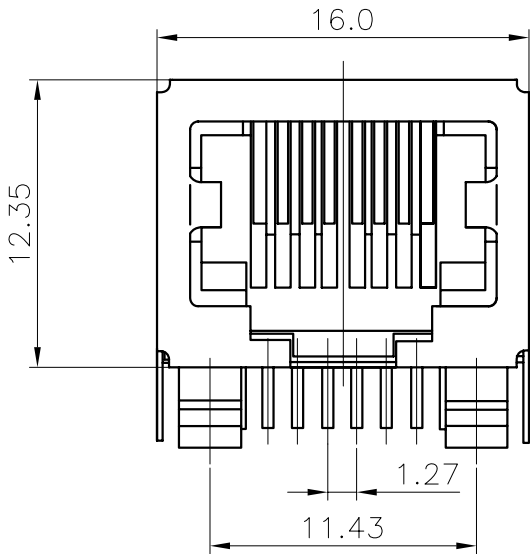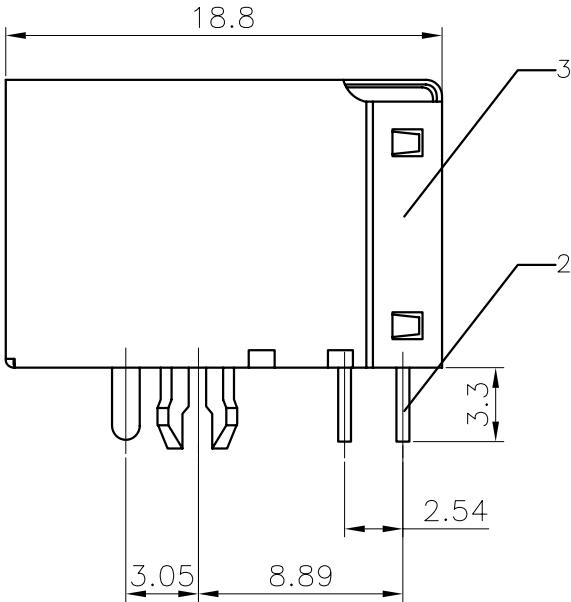


SPECIFICATION

- Insulation Resistance:1000MΩ Min.
 - Withstand Voltage:500V AC/Minute.
 - Durability:600 Cycles Min.
 - Product Number Code:
DS1126-X X X X X
- Housing Materials
P:PBT
N:NYLON
- Housing Color
B:Black
- Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
- No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
- Connector Type
S:Socket
- Series No.
DS1126

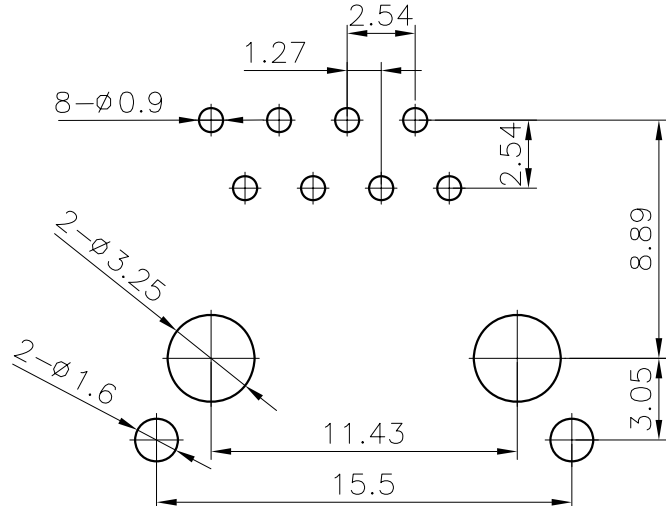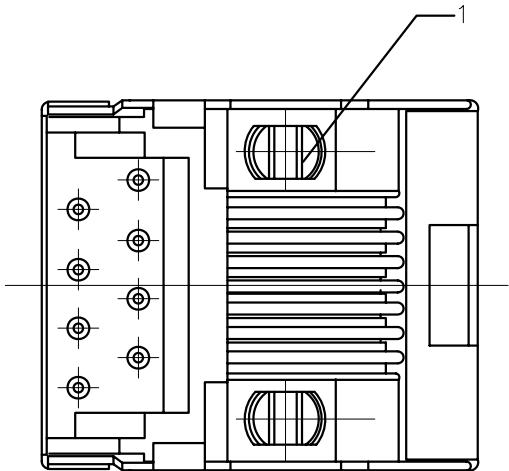



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)




8:8p8c
Bottom View

(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.20mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL
(1)	HOUSING	1	PBT	UL94 V-0 OR 94 V-2
No.	PART NAME	Q'ty	MATERAIL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1126-XXXXX	

PROJECTION		TITLE		PCB JACK 8P
UNITS	mm			
SHEET SIZE	A4	SERIES	DS1126 SERIES	
<div>晨翔电子有限公司</div> <div>CONNFLY CONNFLY ELECTRONIC CO. LTD</div>				

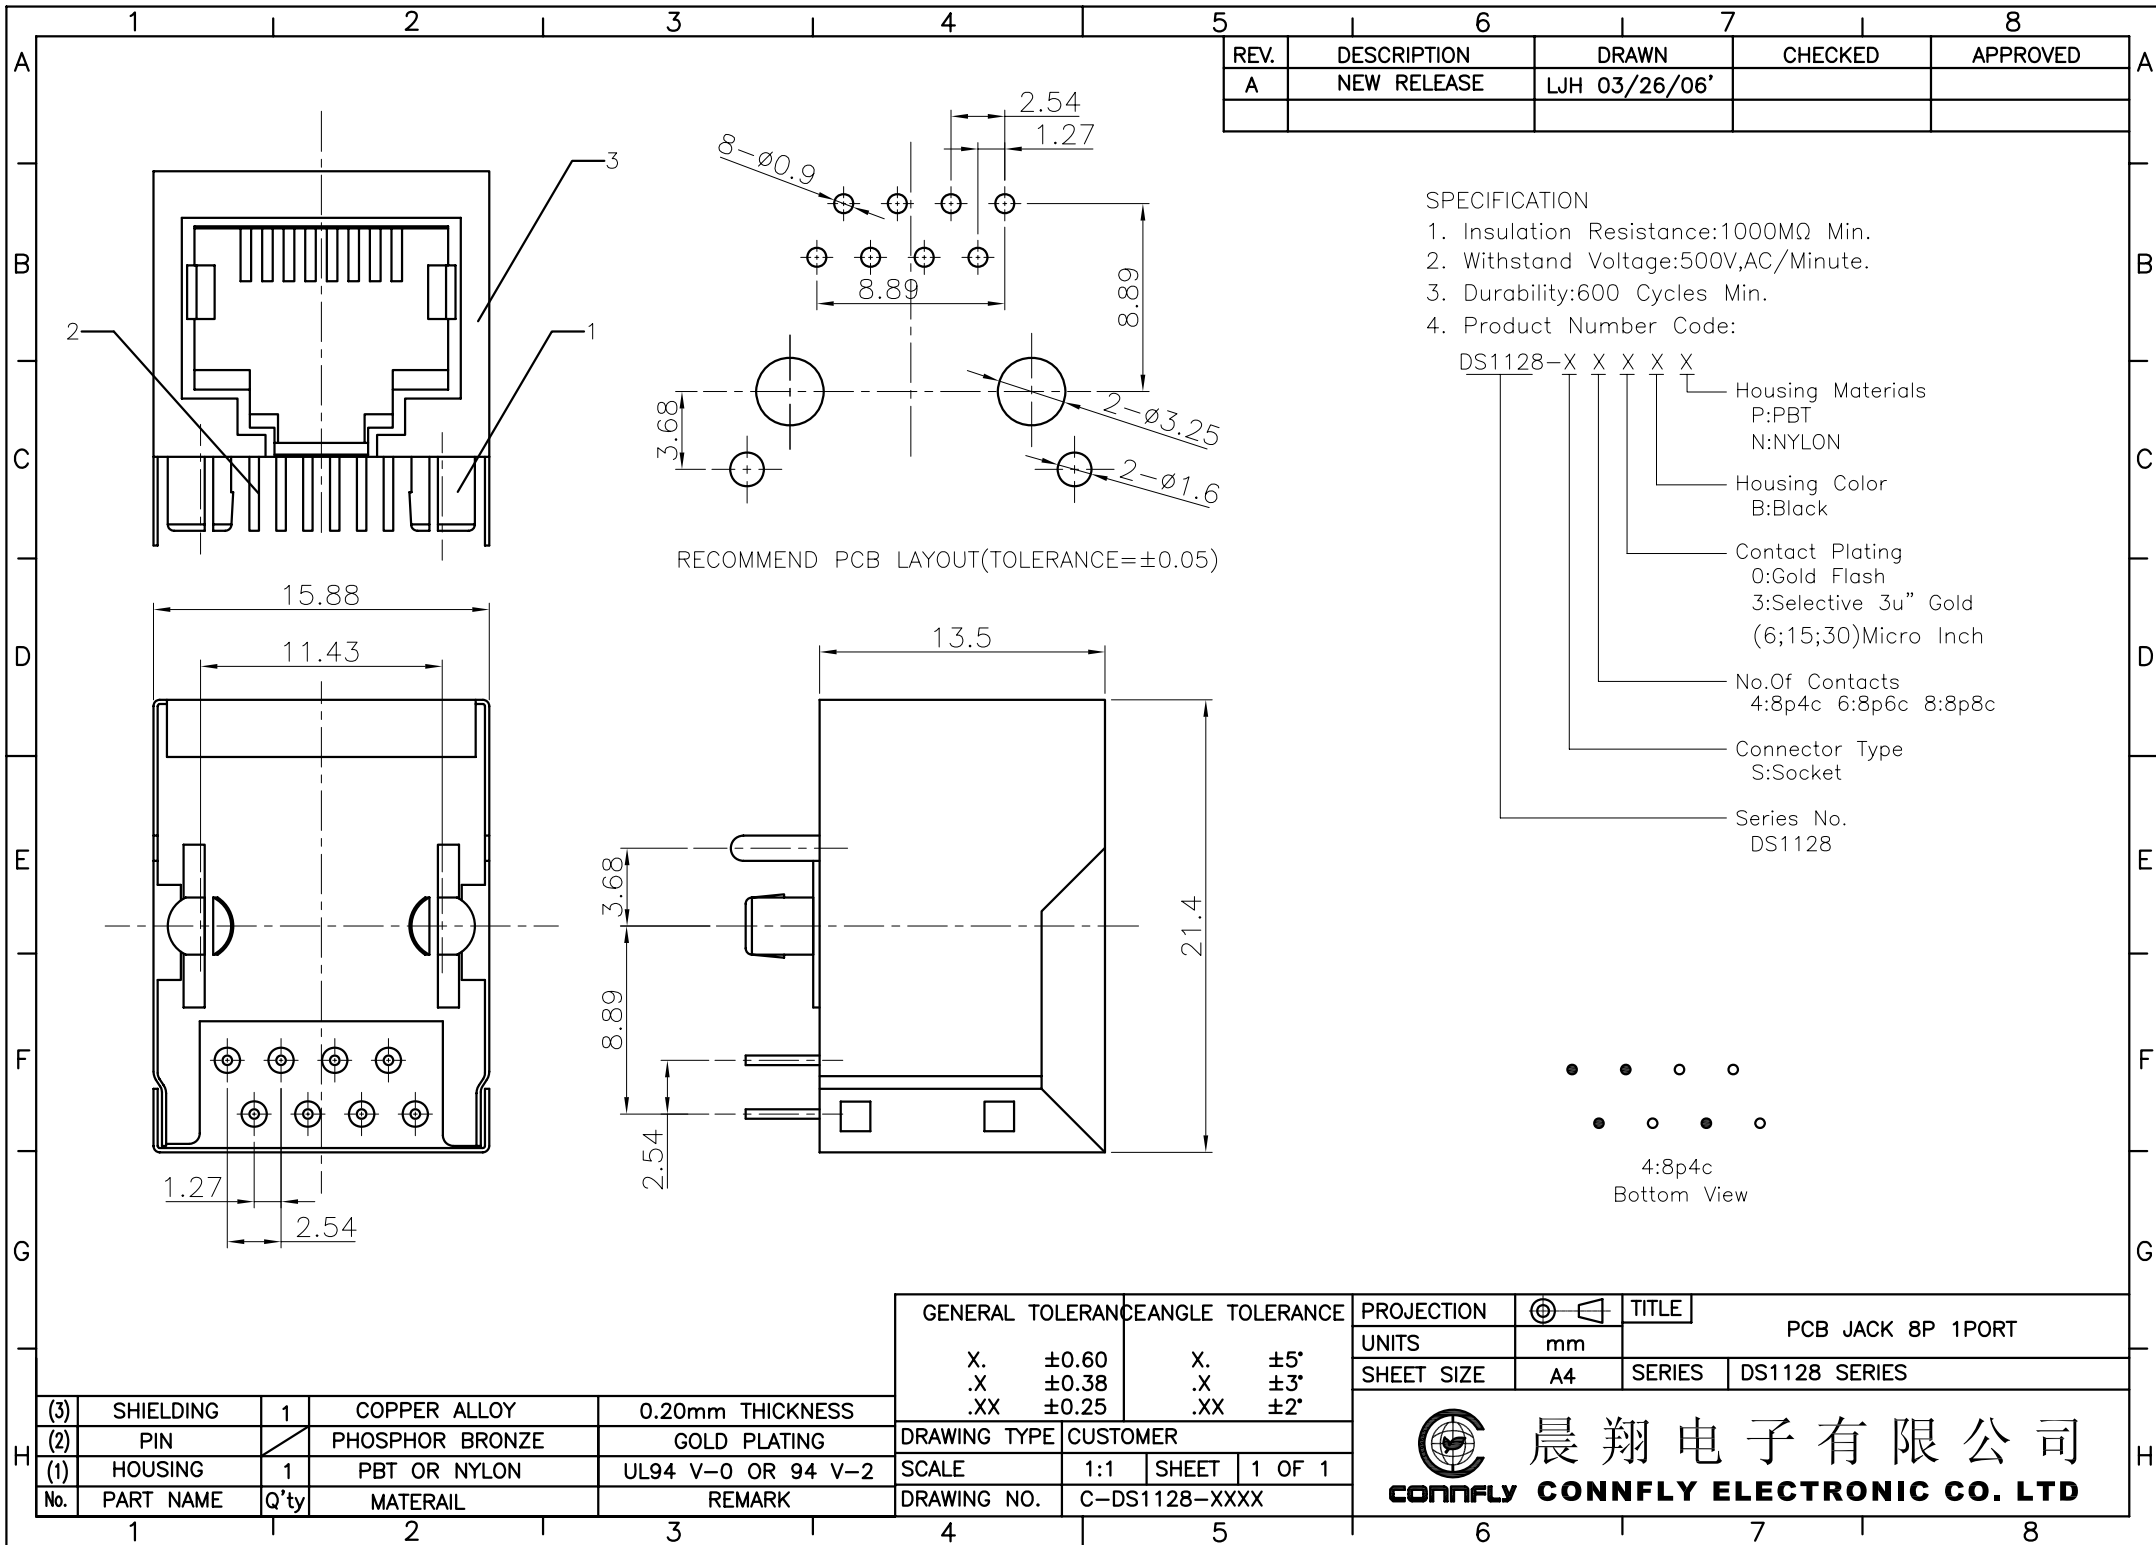





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/21/09'		



SPECIFICATION


- Insulation Resistance:1000MΩ Min.
- Withstand Voltage:500V,AC/Minute.
- Durability:600 Cycles Min.
- Product Number Code:

DS1128 -01 -X X X X

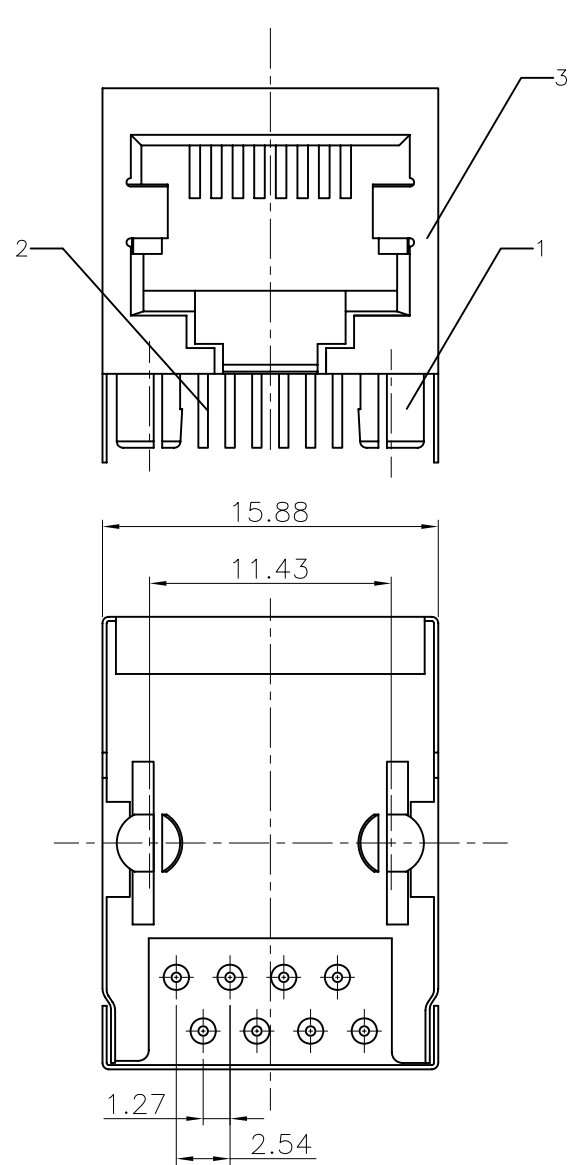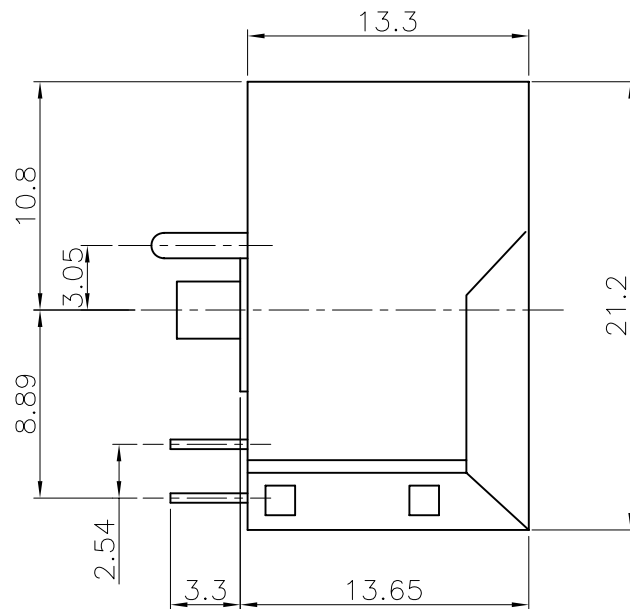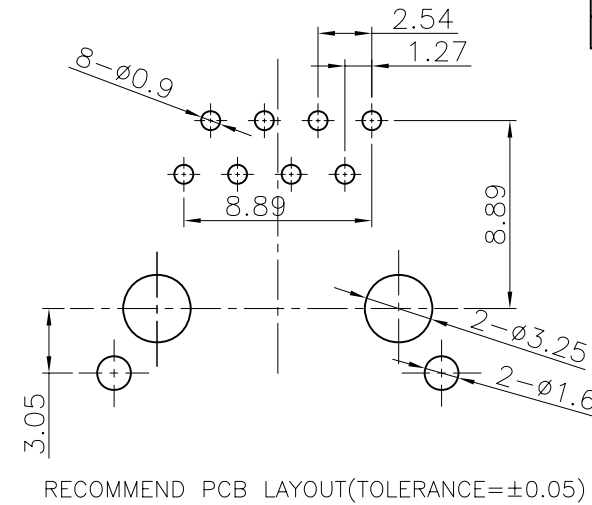

- Housing Color
B:Black
- Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
- No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
- Connector Type
S:Socket






					GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB JACK 8P 1PORT 3.05mm Layout				
					X. ±0.60 .X ±0.38 .XX ±0.25		X. ±5° .X ±3° .XX ±2°		UNITS	mm						
									SHEET SIZE	A4	SERIES	DS1128—01 SERIES				
									<div>晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD</div>							
(3)	SHIELDING	1	COPPER ALLOY	NICKEL PLATING	DRAWING TYPE		CUSTOMER									
(2)	PIN		PHOSPHOR BRONZE	GOLD PLATING	SCALE		1:1	SHEET								1 OF 1
(1)	HOUSING	1	PBT OR NYLON	G.F FILLED UL94 V-0	DRAWING NO.		C-DS1128-01-XXXX									
No.	PART NAME	Q'ty	MATERAIL	REMARK												

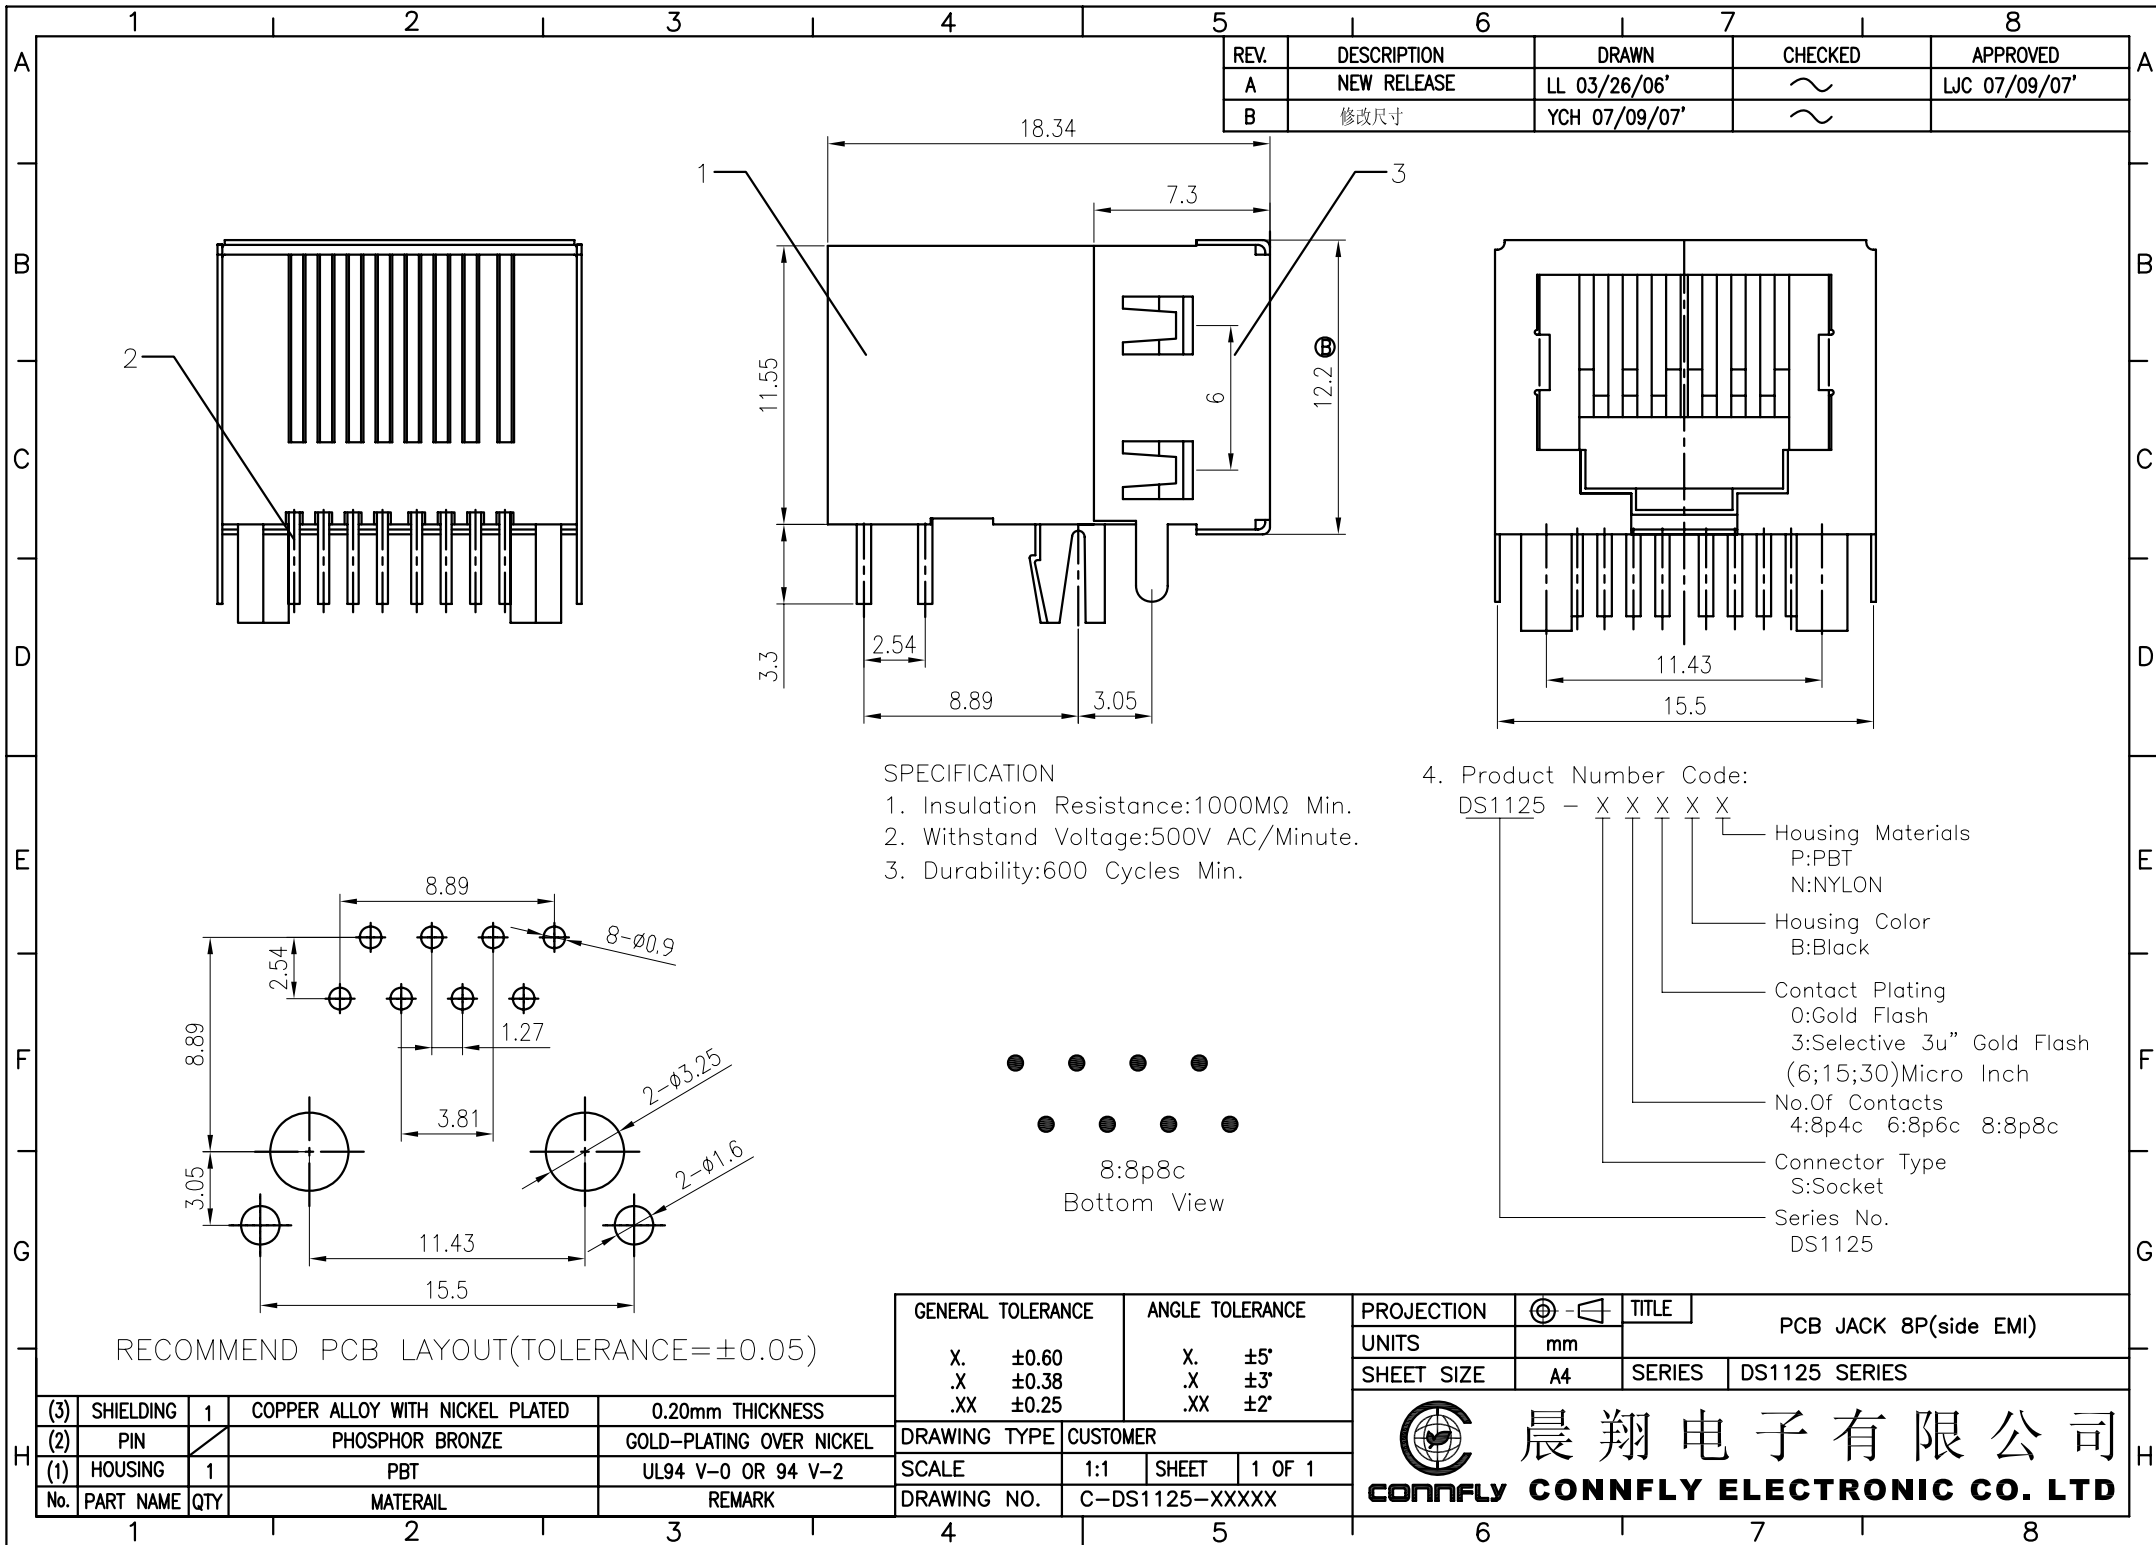

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 11/03/09'	~	

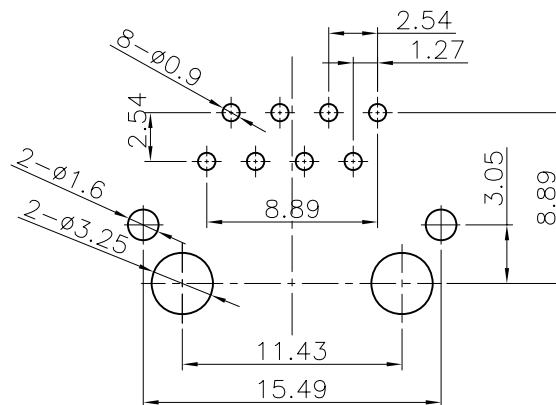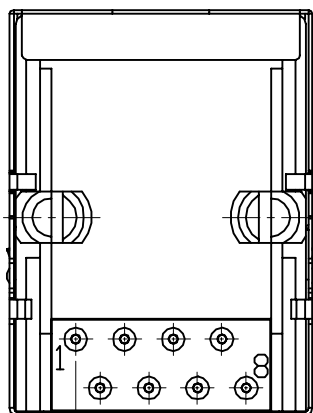

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

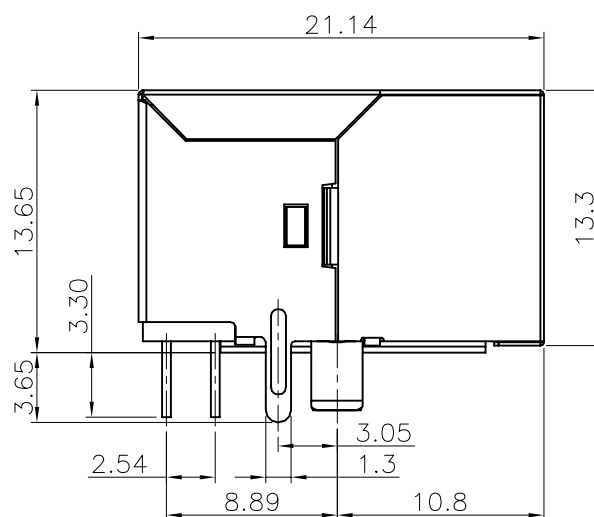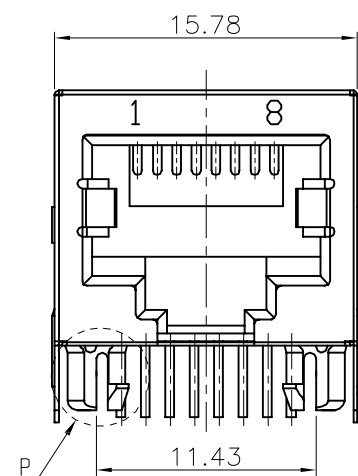

P 2:1

SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V,AC/Minute.
3. Durability:600 Cycles Min.
4. Product Number Code:

DS1128-02-X X X X



— Housing Color
B:Black

— Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch

— No.Of Contacts
4:8p4c 6:8p6c 8:8p8c

— Connector Type
S:Socket




— Series No.
DS1128-02

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	PCB JACK 8P 1PORT	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1128-02 SERIES
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1128-02-XXXX					



 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		

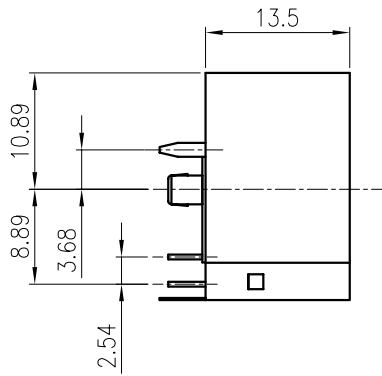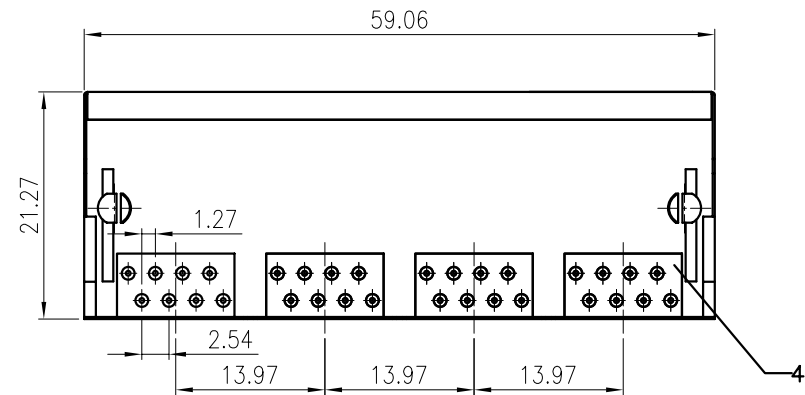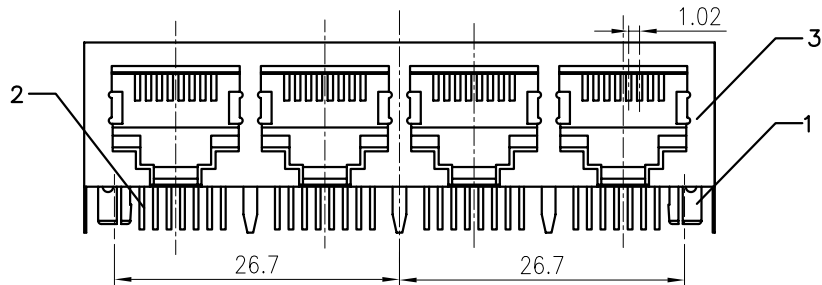


SPECIFICATION

1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Product Number Code:

DS1129-X X X X X

- Housing Materials
P:PBT
N:NYLON
- Housing Color
B:Black
- Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
- No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
- Connector Type
S:Socket
- Series No.
DS1129

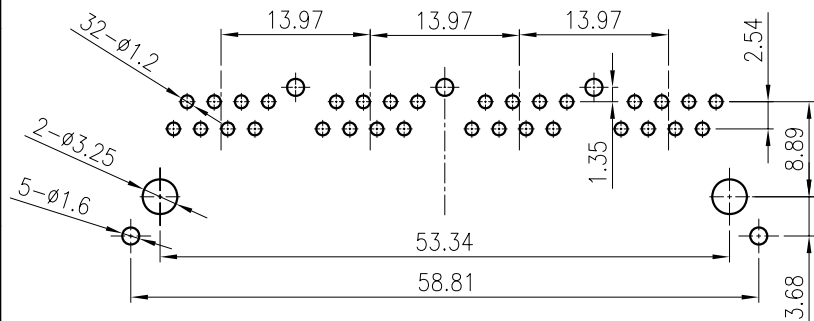


8: 8p8c
Bottom View

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

(4)	COVER	4	PBT OR NYLON	UL94 V-0 OR 94 V-2
(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.25mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD PLATING OVER NICKEL
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	QTY	MATERAIL	REMARK




GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1129-XXXXX	

PROJECTION	TITLE	PCB JACK 8P 4PORT	
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1129 SERIES
 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		

SPECIFICATION


1. Insulation Resistance:1000MΩ Min.
2. Withstand Voltage:500V AC/Minute.
3. Durability:600 Cycles Min.
4. Product Number Code:
DS1130-X X X X X
- Housing Materials
P:PBT
N:NYLON
Housing Color
B:Black
Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
No.Of Contacts
4:8p4c 6:8p6c 8:8p8c
Connector Type
S:Socket
Series No.
DS1130

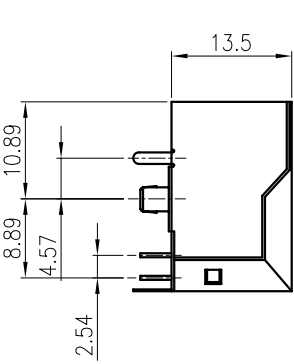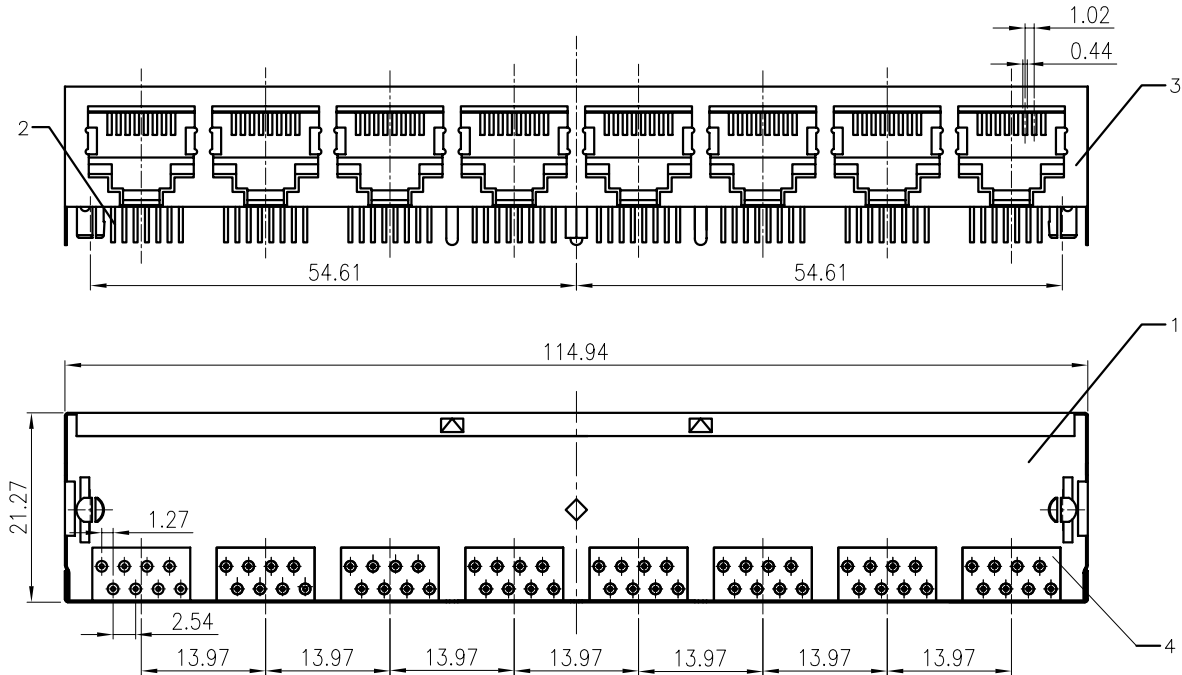

8: 8p8c
Bottom View

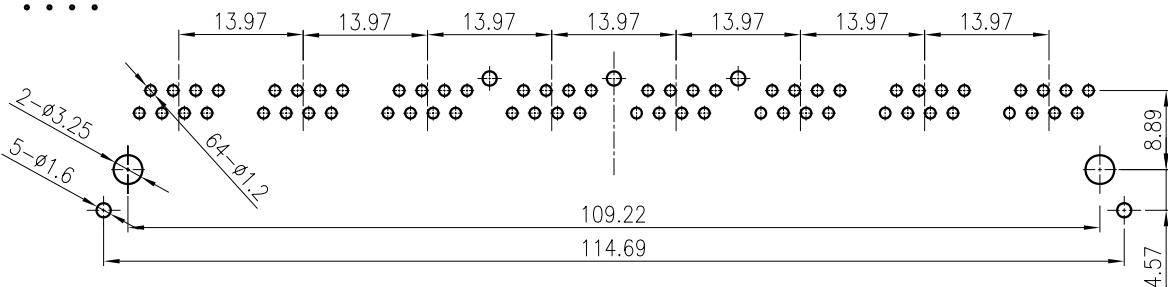


RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

					GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PCB JACK 8 PORT	
					X. ±0.60 .X ±0.38 .XX ±0.25		X. ±5° .X ±3° .XX ±2°		UNITS	mm			
					SHEET SIZE		A4		SERIES	DS1130 SERIES			
(4)	COVER	8	PBT OR NYLON	UL94 V-0 OR 94 V-2	DRAWING TYPE	CUSTOMER					CONNFLY CONNFLY ELECTRONIC CO. LTD		
(3)	SHIELDING	1	COPPER ALLOY WITH NICKEL PLATED	0.25mm THICKNESS	SCALE	1:1	SHEET	1 OF 1					
(2)	PIN		PHOSPHOR BRONZE	GOLD-PLATING OVER NICKEL	DRAWING NO.	C-DS1130-XXXX							
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2									
No.	PART NAME	QTY	MATERAIL	REMARK									

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/26/06'		

SPECIFICATION

- Insulation Resistance:1000MΩ Min.
- Withstand Voltage:500V AC/Minute.
- Durability:600 Mating Cycles Min.
- Product Number Code:
DS1127 - X X X X X
 - Housing Materials
P:PBT
N:NYLON
 - Housing Color
B:Black
 - Contact Plating
0:Gold Flash
3:Selective 3u" Gold
(6;15;30)Micro Inch
 - No.Of Contacts
8:10p8c 6:10p6c 10:10p10c
 - Connector Type
S:Socket
 - Series No.
DS1127



(3)	SHIELDING	1	COPPER ALLOY	0.20mm THICKNESS
(2)	PIN		PHOSPHOR BRONZE	GOLD-PLATING
(1)	HOUSING	1	PBT OR NYLON	UL94 V-0 OR 94 V-2
No.	PART NAME	Q'TY	MATERAIL	REMARK

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1127-XXXX	

PROJECTION		TITLE	PCB JACK 10P
UNITS	mm	SHEET	1 OF 1
SHEET SIZE	A4	SERIES	DS1127 ERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD