


Female Terminal





Female Terminal



| Wire Range                      |       | O.D of Wire |
|---------------------------------|-------|-------------|
| Section Area (mm <sup>2</sup> ) | AWG#  | mm          |
| 0.2~0.75                        | 24~18 | 1.2~2.1     |




Female Housing



Male Right Angle





Type A



Type B

Male V/T TYPE



N=NO. OF CONTACTS


| REV. | DESCRIPTION | DRAWN         | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A    | NEW RELEASE | YCH 06/27/08' | ~       |          |
|      |             |               |         |          |
|      |             |               |         |          |

NOTES:

1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Wires range: AWG#24~#18
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance: ≤ 30mΩ
- . Insulation resistance: ≥ 1000MΩ
- . Withstanding voltage: 500V,AC 1 minute
- . Temperature range: -25 ~ +85°C

2. PRODUCT NUMBER CODE:

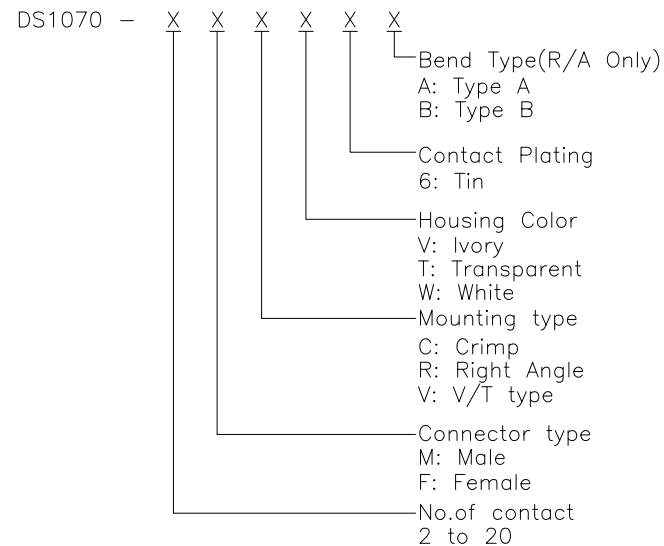

| GENERAL TOLERANCE |       | ANGLE TOLERANCE  |     | PROJECTION   | TITLE                        |
|-------------------|-------|------------------|-----|--|------------------------------|
| X.                | ±0.60 | X.               | ±5° |  | P.C.B CONNECTOR Pitch 2.54mm |
| .X                | ±0.38 | .X               | ±3° | mm   |                              |
| .XX               | ±0.25 | .XX              | ±2° | A4   | SERIES DS1070                |
| DRAWING TYPE      |       | CUSTOMER         |     | 晨翔电子有限公司<br><b>CONFLY CONNFLY ELECTRONIC CO. LTD</b> |                              |
| SCALE             |       | 1:1 SHEET 1 OF 1 |     |  |                              |
| DRAWING NO.       |       | C-DS1070-XXXXXX  |     |  |                              |

