




RAL 7001



RAL 7035



RAL 9005

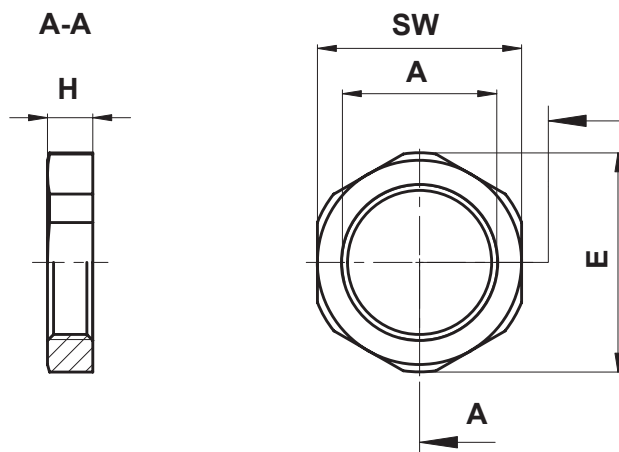

■ Materiale: PA 6 GF (PG36-PG48 PA 6) /
Material: PA 6 GF (PG36-PG48 PA6)

■ Colore: Vedi tabella / Colour: See table

■ Autoestinguenza: HB (UL94) / UL Flammability: HB (UL94)

■ Temperatura d'esercizio: -20°C ~ +100° C / Operating
temperature: 20°C ~ +100° C

■ Pg a norma DIN 40430 / Pg as per DIN 40430

■ Tutte le quote sono in mm. / All dimensions are in mm.

CODICE P/N	CODICE P/N	CODICE P/N	DIMENSIONI SIZES				CONF. PKG.
			A	SW	E	H	
RAL 7001	RAL 7035	RAL 9005					pz./pcs.
8630BB117001	8530BB117035	8540BB019005	Pg 7	19	21	5	100
8631BB117001	8531BB117035	8541BB019005	Pg 9	22	24	5	100
8632BB117001	8532BB117035	8542BB019005	Pg 11	24	26	5	100
8633BB117001	8533BB117035	8543BB019005	Pg 13,5	27	29	6	100
8634BB117001	8534BB117035	8544BB019005	Pg 16	30	33	6	100
8635BB117001	8535BB117035	8545BB019005	Pg 21	36	39	7	100
8636BB117001	8536BB117035	8546BB019005	Pg 29	46	50	7	100
8637AA117001	8537AA117035	8547AA019005	Pg 36	60	66	8	50
8638AA117001	8538AA117035	8548AA019005	Pg 42	65	72,8	8	50
8639AA117001	8539AA117035	8549AA019005	Pg 48	70	78	8	50