




CIRCUIT DIAGRAM

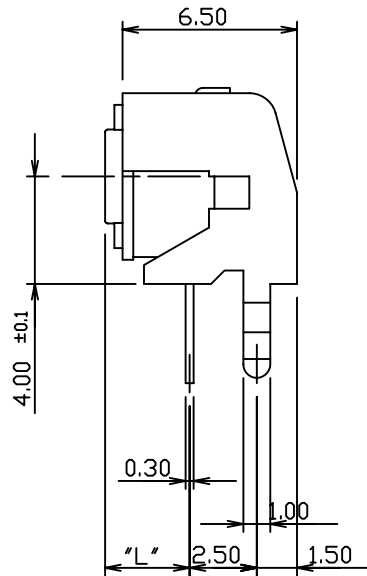


NO	PART NAME	Q'TY	MATERIAL	RAMARKS
①	CASE	1	NYLON66 G30	BLACK
②	STEM	1	NYLON66 G30	BLACK
③	BRACKET	1	SPTE	
④	TERMINAL	1	C2680R-EH	Ag0.5μ
⑤	CONTACT	1	C5210R-EH Ag clad 0.5μ	

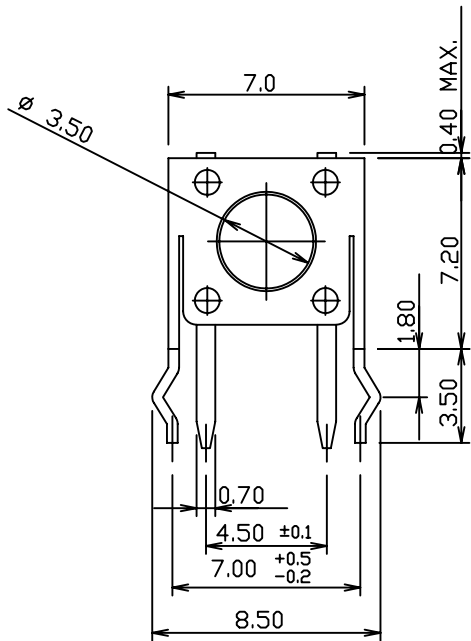

NOTE

1. OPERATING FORCE : 160 ± 50 gf
2. TRAVEL : 0.25 +0.2/-0.1 mm
3. CONTACT RESISTANCE : 100mΩ Max
4. GENERAL TOLERANCE : ±0.3

P.C.B DIMENSION

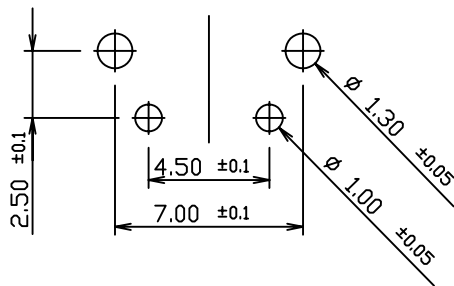

MODEL	"L"	COLOR
1102N	3.15	BLACK
1102NA	3.85	BLACK
1102NB	5.85	BLACK
1102NC	6.85	WHITE
1102ND	8.35	BLACK
1102NE	6.15	IVORY
1102NF	11.35	BLACK
1102NG	12.35	BLACK

No.	PART NAME	Q'TY	MATERIAL	SIZE	TREAT.	REMARKS
△			3RD ANGLE PROJECTION	UNIT	SCALE	MODEL
△			APPROVED	m/m	DESIGNED	1102N SERIES
△			CHECKED			DWG.NAME
△						ASS'Y DIAGRAM
△						DWG.NO.
NO.	DATE	NOTE	SIGN			