

## Data Sheet

**Customer :**

---

**Product :** **Thin Film Array Chip Resistor - TFAN Series**

---

**Size:** **0603x4**

---

**Issued Date:** **2-May-16**

---

**Edition :** **REV.B4**

---



VIKING TECH CORPORATION  
光頡科技股份有限公司

No.70, Kuanfu N. Rad.,  
Hsin Chu Industrial Park,  
Hukou Hsiang, Hsin Chu Hsien,  
303, Taiwan

TEL:886-3-5972931

FAX:886-3-5972935•886-3-5973494

E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH  
光頡科技股份有限公司高雄分公司

No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,  
806, Taiwan

TEL:886-7-8217999

FAX:886-7-8228229

E-mail:sales@viking.com.tw

WUXI TMTEC CO., LTD.  
無錫泰銘電子有限公司

No.1A,(Xixia Road),Machinery & Industry Park,  
National Hi-Tech Industrial Development Zone of  
Wuxi, Wuxi, Jiangsu Province, China

Zip Code:214028


TEL:86-510-85203339

FAX:86-510-85203667•86-510-85203977

E-mail:wuxisales@tmtec.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
2-May-16	2-May-16	2-May-16	2-May-16	
<i>Chun</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

## Thin Film Array Chip Resistor (TFAN Series)

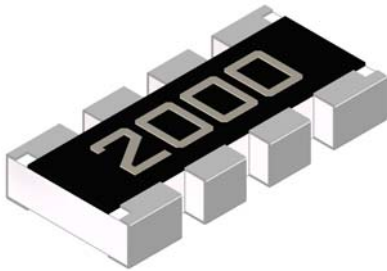


### ■ Features

- Advanced thin film technology
- Very tight tolerance down to  $\pm 0.1\%$
- Extremely low TCR down to  $\pm 10\text{PPM}/^\circ\text{C}$
- TCR tracking down to  $15\text{ppm}(\pm 7.5\text{ppm})$  and tolerance matching down to  $0.1\%(\pm 0.05\%)$
- RoHS compliant component, compatible with lead (Pb)-free

### ■ Applications


- Voltage divider
- Feedback circuits
- Signal conditioning

### ■ Construction

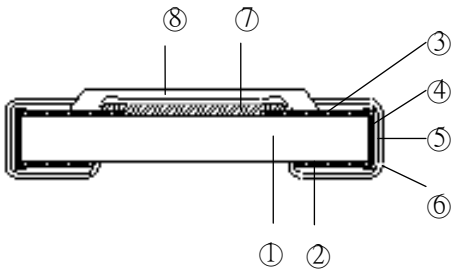


① Alumina Substrate	④ Edge Electrode	⑦ Resistor Layer
② Bottom Electrode	⑤ Barrier Layer	⑧ Overcoat
③ Top Electrode	⑥ External Electrode	

### ■ Equivalent Circuit Diagram

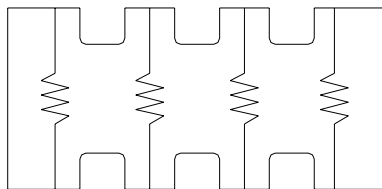

TFAN

**■ Dimensions**

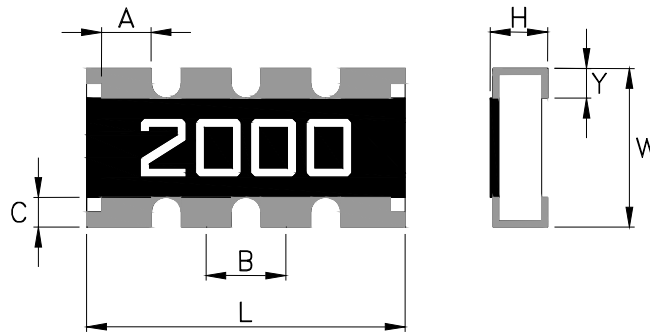

Type	Number of Resistors	L	W	H	A	B	C	Y
TFAN43	4	3.20±0.15	1.60±0.15	0.55±0.10	0.50±0.15	0.80±0.05	0.30±0.15	0.30±0.15


**■ Part Numbering**

TFAN	43	B0	T	C0	Y	1001	N
Product Type	Dimensions	Tolerance Grade	Packaging Code	TCR Grade	Power Rating	Resistance	Marking Code
	0603X4	Reference Tolerance Grade Table	T: Taping Reel B: Bulk	Reference TCR Grade Table	Y: 1/16W	1000: 100Ω 1001: 1KΩ 1211: 1.21KΩ 1004: 1MΩ	: Standard Marking for E96 N: No Marking

Accuracy Grade Table

Tolerance Grade				TCR Grade			
Code	Absolute Tolerance	Tolerance Matching	Resistance Value	Code	Absolute TCR	TCR Tracking	Resistance Value
B0	±0.1%	N/A	24.9~100K	B0	±10ppm	N/A	24.9~2K
B3	±0.1%	0.1%	24.9~100K	B3	±10ppm	15ppm	24.9~2K
C0	±0.25%	N/A	24.9~100K	N0	±15ppm	N/A	24.9~2K
C2	±0.25%	0.25%	24.9~100K	N3	±15ppm	15ppm	24.9~2K
C3	±0.25%	0.1%	24.9~100K	C0	±25ppm	N/A	24.9~100K
D0	±0.5%	N/A	24.9~100K	C2	±25ppm	25ppm	24.9~100K
D1	±0.5%	0.5%	24.9~100K	C3	±25ppm	15ppm	24.9~100K
D2	±0.5%	0.25%	24.9~100K	D0	±50ppm	N/A	24.9~100K
F0	±1%	N/A	24.9~100K	D1	±50ppm	50ppm	24.9~100K
F1	±1%	0.5%	24.9~100K	D2	±50ppm	25ppm	24.9~100K

**Derating Curve**

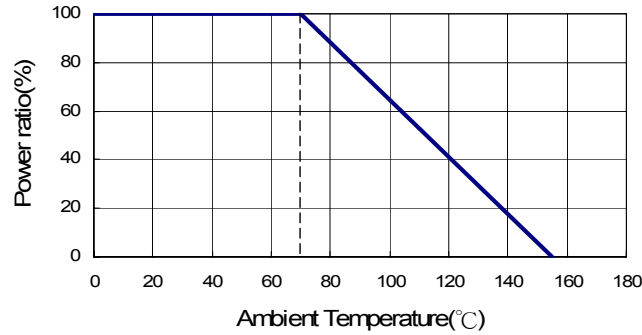

**Electrical Specifications**

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range				TCR (PPM/°C)
					±0.1%	±0.25%	±0.5%	±1%	
TFAN 43	1/16W	-55 ~ +155°C	50V	100V	24.9Ω~100KΩ				±25 ±50

**Special Specifications**

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range				TCR (PPM/°C)
					±0.1%	±0.25%	±0.5%	±1%	
TFAN 43	1/16W	-55 ~ +155°C	50V	100V	24.9Ω~2KΩ				±10 ±15

Operating Voltage= $\sqrt{P \cdot R}$  or Max. operating voltage listed above, whichever is lower.  
 Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$  or Max. overload voltage listed above, whichever is lower.  
 ■Viking is capable of manufacturing the optional spec based on customer's requirement.


**■ Environmental Characteristics**

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	<b>MIL-STD-202 Method 304</b> +25/-55/+25/+125/+25°C
Short Time Overload	$\Delta R \pm 0.1\%$	<b>JIS-C-5201-1 5.5</b> RCWV*2.5 or Max. overload voltage whichever is lower for 5 seconds
Insulation Resistance	>1000 M $\Omega$	<b>MIL-STD-202 Method 302</b> Apply 100V <sub>DC</sub> for 1 minute
Endurance	1000Hr : $\Delta R \pm 0.15\%$ 8000Hr : $\Delta R \pm 0.3\%$	<b>MIL-STD-202 Method 108A</b> 70 $\pm$ 2°C, RCWV with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	$\Delta R \pm 0.25\%$	<b>MIL-STD-202 Method 103B</b> 40 $\pm$ 2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load(85°C/85% R.H)	$\Delta R \pm 0.5\%$	85 $\pm$ 2°C, 80~90% R.H. 10% of RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Dry Heat	1000Hr : $\Delta R \pm 0.25\%$ 8000Hr : $\Delta R \pm 0.5\%$	At +125°C
Bending Strength	$\Delta R \pm 0.2\%$	<b>JIS-C-5201-1 6.1.4</b> Bending amplitude 3 mm for 10 seconds
Solderability	95% min. coverage	<b>MIL-STD-202 Method 208H</b> 245 $\pm$ 5°C for 3 seconds
Resistance to Soldering Heat	$\Delta R \pm 0.2\%$	<b>MIL-STD-202 Method 210E</b> 260 $\pm$ 5°C for 10 seconds
Dielectric Withstand Voltage	100V	<b>MIL-STD-202 Method 301</b> Max. overload voltage for 1 minute
Thermal Shock	$\Delta R \pm 0.25\%$	<b>MIL-STD-202 Method 107G</b> -55°C ~150°C, 100 cycles
Low Temperature Operation	$\Delta R \pm 0.25\%$	<b>JIS-C-5201-1 7.1</b> 1 hour, -65°C, followed by 45 minutes of RCWV

RCWV(Rated continuous working voltage)=  $\sqrt{P \cdot R}$  or Max. Operating voltage whichever is lower


■ Storage Temperature: 15~28°C; Humidity < 80%RH

**■ Reflow**

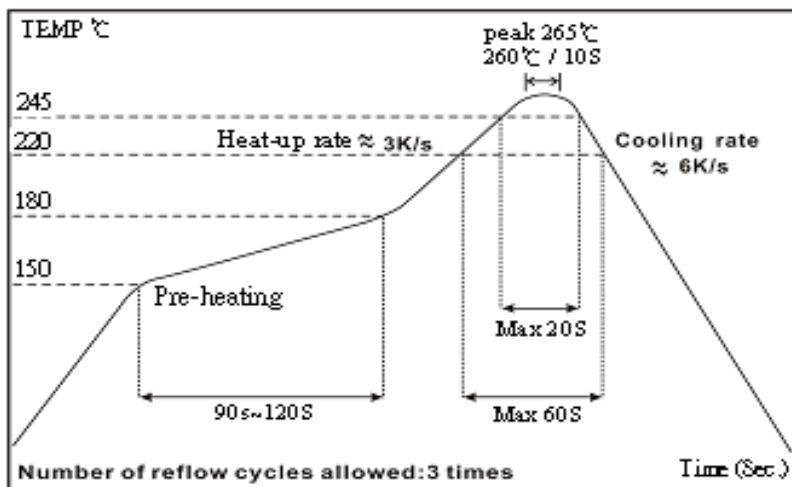

**■Packaging**


Reel Specifications & Packaging Quantity

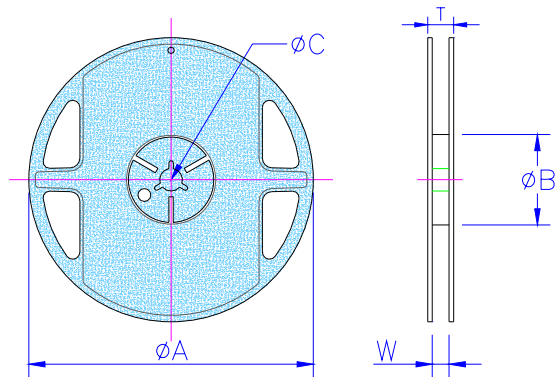

Unit: mm

Type	Packaging Quantity	Tape width	Reel Diameter	$\phi A$	$\phi B$	$\phi C$	W	T
TFAN 43	Paper 5K	8mm	7 inch	178.5±1.5	60 <sup>+1/-0</sup>	13.0±0.2	9.0±0.5	12.5±0.5

Paper Tape Specifications

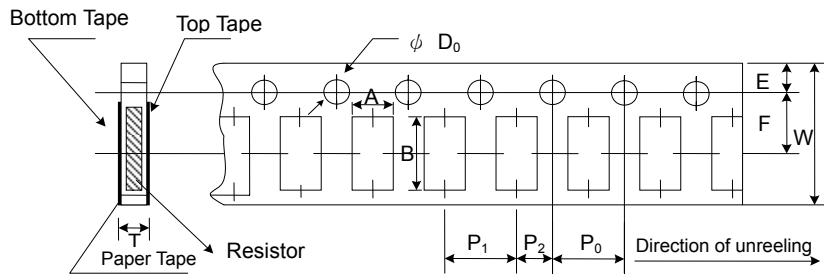

Unit: mm

Type	A	B	W	E	F	$P_0$	$P_1$	$P_2$	$\phi D_0$	T
TFAN-43	1.95±0.1	3.50±0.1	8.0±0.2	1.75±0.1	3.5±0.05	4.0±0.1	4.0±0.05	2.0±0.05	1.5 <sup>+0.1/-0</sup>	0.85±0.1


**■Marking**

TFAN 43: 4 digits marking

Example:

Resistance	100Ω	2.2KΩ	10KΩ	49.9KΩ	100KΩ
marking	1000	2201	1002	4992	1003

**■Recommend Land Pattern**



Unit: mm

Type	A	B	C	I	P
TFAN-43	3.10	2.85	0.45	0.80	0.80

**REVISION HISTORY**

<b>REVISION</b>	<b>DATE</b>	<b>CHANGE NOTIFICATION</b>	<b>DESCRIPTION</b>
Version B	Oct 31,2013	-	- Add $\pm 1\%$ Tolerance.
Version B1	May 13,2014	-	- Correct Land Pattern dimensions.
Version B2	Sep 04,2014	-	- Update Resistance value range.
Version B3	May 08,2015	-	- Correct the element of Top Electrode.
Version B4	May 02,2016	-	- Modify Storage Temperature. - Remove Material Description.