Cable Management Accessories

> Q. Index

COPPER SYSTEMS

Panduit offers end-to-end solutions for all twisted pair copper cabling applications. TX[™] Copper Cabling Systems provide reliable network performance for the most demanding high-speed and bandwidth-demanding applications while exceeding the latest industry standards. Mini-Com® Modules are interchangeable within Panduit modular patch panels, faceplates, and surface mount boxes to provide modular solutions for intermediate to high-density installations. A variety of colors enable color-coding of connectivity for network segregation.

terminating, and testing

active equipment

end-to-end solution

for maximum reliability

 Pre-terminated solution can be installed in 75% less time than field-terminated installations,

eliminating the need for on-site bundling,

 Plug pack assemblies facilitate guick and easy connection and disconnection of patch cords

to a variety of switches, reducing time and cost associated when installing and maintaining

Copper cable is designed to be installed with

Panduit connectivity products (jack modules, pre-terminated cassettes, patch panels, and

patch cords) to provide a reliable, modular,

Copper TG Style Jack Modules feature enhanced

Giga-TX[™] Technology optimizing performance by

maintaining cable pair geometry and eliminating conductor untwist; forward motion termination places no impact on critical internal components

Patented angled patch panels facilitate proper bend

radius control and minimize the need for horizontal

cable managers, providing a high-density solution

which conserves valuable rack space

















- - The QuickNet™ Copper Cabling System is a pre-terminated solution with standard and custom options, designed to meet data center and enterprise cabling requirements. Fast and simple to install, this high-density solution provides consistent network reliability and reduces on-site rework. TX™ Copper Cabling Systems are available in Category 6A, Category 6, and Category 5e performance levels and include STP and UTP copper cable, jack modules, patch cords and patch panels. Panduit solutions are designed with flexibility to support your growing and changing network requirements.



B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding


> N. Industrial

0. Labeling & Identification


P. Cable Management Accessories

> Q. Index

Copper Systems Roadmap

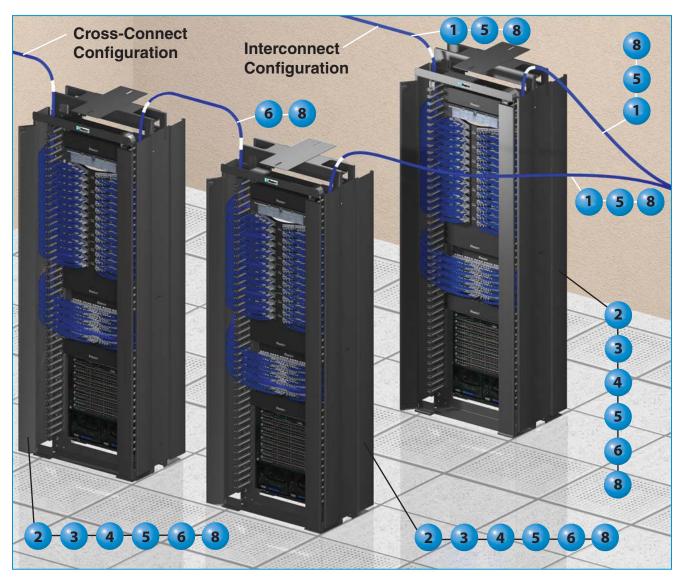

Data Center/Telecommunications Room





Mini-Com® Modular Patch Panels (pages B.66 – B.73)



Mini-Com^o Jack Modules (pages B.16 – B.17, B.20 – B.21, B.28 – B.29, B.36 – B.37, B.40 – B.42, B.48 – B.49, B.55, B.58 – B.64)



Punchdown and Coupler Patch Panels (pages B.22, B.24, B.31, B.33, B.43, B.45, B.53)



B. Copper Systems

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management


Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

Q. Index

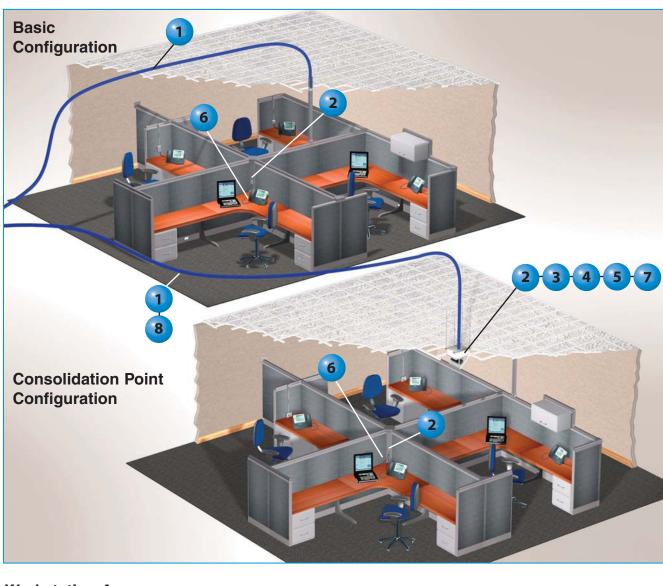

Workstation Area





Zone Cabling (pages E.1 – E.10)





Patch Cords (pages B.18, B.25, B.34, B.46, B.50)



Grounding and Bonding 8 (pages M.1 – M.58)





C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

SFP+ 10 Gb/s Direct Attach Passive Cable Assemblies

- Meet SFF-8431, 8432, 8472 industry standards to support 10 Gigabit Ethernet
- Ideal for Top of Rack (ToR) switch to server applications
- Passive connection provides a low cost, short reach interconnect option without additional power requirements
- Constructed with high speed, 2-pair, twinaxial cable, factory terminated to SFP+ 10 Gb/s hot pluggable modular connectors
- 100% performance tested

- Low profile latching mechanism in connector allows assemblies to be installed side by side or stacked on top of each other providing maximum port density in high density installations
- Small diameter cable design enables superior cable management and improved air flow
- Robust strain relief boot provides proper bend radius control for consistent reliability
- Variety of standard lengths allow more precise deployment, improved cable management and cost efficiencies



Part Number	Part Description	Length (m)	AWG Size	Cable Color	Std. Pkg. Qty.	Ctn.
PSF1PXA1MBU*	High speed twinaxial cable assembly with SFP+ 10Gbps hot pluggable modular connectors on each end.	1	30	Blue	1	10
PSF1PXD4MBU‡	High speed twinaxial cable assembly with SFP+ 10Gbps hot pluggable modular connectors on each end.	4	24	Blue	1	10

*For lengths other than 1 meter (0.5 meters to 3.5 meters, increments of 0.5 meter) change the length designation in the part number to the desired length. For standard cable colors other than Blue, replace suffix BU (Blue) with WH (White) or BL (Black). For example, the part number for a white, 0.5 meter cord is PSF1PXA0.5MWH. ‡ For lengths other than 4 meters (4 to 7 meters, increments of 0.5 meter) change the length designation in the part number to the desired length. For standard cable colors other than Blue, replace suffix BU (Blue) with WH (White) or BL (Black). For example, the part number for a white, 7-meter cord is PSF1PD7MWH.

SFP+ 10 Gb/s Direct Attach Active Cable Assemblies

- Meet SFF-8431, 8432, 8472 industry standards to support 10 Gigabit Ethernet
- Ideal for Top of Rack (ToR) and End of Row (EoR) switch to server applications
- Fibre Channel over Ethernet (FCoE) capable
- · Connector contains low power circuitry to extend beyond passive cable assemblies
- Constructed with high speed, 2-pair, twinaxial cable, factory terminated to SFP+ 10Gbps hot pluggable modular connectors
- 100% performance tested

- Low profile latching mechanism in connector allows assemblies to be installed side by side or stacked on top of each other providing maximum port density in high density installations
- Small diameter cable design enables superior cable management and improved air flow
- Robust strain relief boot provides proper bend radius control for consistent reliability
- · Variety of standard lengths allow more precise deployment, improved cable management, and cost efficiencies



Part Number	Part Description	Length (m)	AWG Size	Cable Color	Std. Pkg. Qty.	Ctn.
PSF1AXD7MBU*	High speed twinaxial cable assembly with SFP+ 10 Gb/s hot pluggable, active modular connectors on each end.	7	24	Blue	1	10
PSF1AXA3MBU**	High speed twinaxial cable assembly with SFP+ 10 Gb/s hot pluggable modular connectors on each end.	3	30	Blue	1	10

*For lengths other than 7 meter (7 to 15 meters, increments of one meter) change the length designation in the part number to the desired length. For standard cable colors other than Blue, replace suffix BU (Blue) with WH (White) or BL (Black). For example, the part number for a white 10-meter cord is PSF1AXD10MWH.

**Also available in 5 meters. For standard cable colors other than Blue, replace suffix BU (Blue) with WH (White) or BL (Black). The part number for a black 5-meter cord is PSF1AXA5MBL.

Copper Systems

C. Fiber Optic 0 Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

QSFP+ 40Gig Direct Attach Copper Cable Assemblies

- Compliant to IEEE 802.3ba and SFF-8436 for use in 40GBASE-CR4 applications
- EEPROM compliant to SFF-8436 ensures interoperability with 40 Gigabit Ethernet equipment
- Low latency is ideal for use in high performance computer clustering, financial trading, and other latency sensitive applications
- Low profile latching allows high density belly to belly installation

- Constructed with 8-pair twinaxial cable factory terminated to QSFP+ 40 Gb/s hot pluggable modular connectors
- 100% tested for assured system performance
- Available for 40GBASE-CR4 Ethernet applications for distances up to 7 meters and InfiniBand QDR applications up to 5 meters
- Advanced proprietary connector paddle card design reduces crosstalk



PQSFPXA1MBU

Part Number	Part Description	Length (m)	AWG Size	Cable Color	Std. Pkg. Qty.	
40GBASE-CR4						
PQSFPXA1MBU	40GBASE-CR4 Ethernet high speed twin axial	1	30	Blue	1	10
PQSFPXA2MBU	cable assembly with QSFP+ 40 Gb/s hot pluggable modular connectors on each end.	2	30	Blue	1	10
PQSFPXA3MBU		3	30	Blue	1	10
PQSFPXB4MBU		4	28	Blue	1	10
PQSFPXC5MBU		5	26	Blue	1	10
PQSFPXD6MBU		6	24	Blue	1	10
PQSFPXD7MBU		7	24	Blue	1	10
InfiniBand QDR						
PQSFPQA1MBU	InfiniBand QDR high speed twinaxial cable	1	30	Blue	1	10
PQSFPQA2MBU	assembly with QSFP+ 40 Gb/s hot pluggable modular connectors on each end.	2	30	Blue	1	10
PQSFPQB3MBU		3	30	Blue	1	10
PQSFPQC4MBU		4	26	Blue	1	10
PQSFPQD5MBU		5	24	Blue	1	10

Labels for Cable



Suggested Label Solutions for TIA/EIA-606-A Compliance							
Cable Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label			
All cable assemblies on this page	S100X225YAJ	S100X225VATY	S100X225VAC	T100X000CBC-BK			

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

- Compliant to SFF-8431 and 8436, which allows compatibility with 40GBASE-CR4 QSFP+ and 10 GbE SFP+ enabled equipment; hot pluggable to QSFP+/SFP+ compliant host ports
- Ideal for Top of Rack (ToR) applications
- EEPROM compliant to SFF-8472 and 8436, which ensures interoperability with 10 GbE and 40 GbE equipment
- Passive low power provides a low cost alternative to fiber optics up to 3.5 meters
- Low latency performance is ideal for high performance computer clustering, financial trading, and other latency sensitive applications

- Constructed of high speed twinaxial cable factory terminated to QSFP+ and SFP+ modular connectors
- · Advanced connector design and continuous shielding throughout the assembly provide excellent resistance to EMI and alien crosstalk
- Tak-Ty® Hook & Loop Cable Ties allow adjustable breakout points on the hydra end of the cable assembly
- QSFP+ connectors triple switch port density, which is ideal for high density deployment
- · Robust easy-to-use latching feature allows high density belly-to-belly installation



PHQ4SFPXA1MBL

Part Number	Part Description	Length (m)	AWG Size	Cable Color	-	Ctn.
PHQ4SFPXA1MBL	High speed, 2-pair, twinaxial cable, factory terminated to QSFP+ and four SFP+ modular connectors.	1	30	Black	1	10

*For lengths other than 1 meter (1.5, 2, 2.5, 3, 3.5) change the length designation in the part number to the desired length. For example, the part number for a 2-meter cable assembly is PHQ4SFPXA2MBL.

Copper Systems

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

Wireless

F.

Media

Distribution

G.

Outlets

I. **Physical** Infrastructure Management

J. Overhead & Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & **Bonding**

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

QuickNet™ Cable Assemblies

- · Allow quick network deployment compared to field-terminated installations
- 100% performance tested to electrical permanent link specifications; shipped with permanent link test data for
- Terminated in factory controlled environment for consistent network performance
- Pre-bundled with six cables for easy installation
- Plenum or riser cable flame ratings

- Category 6 UTP and Category 6A UTP/Shielded performance levels available
- Available in many common standard lengths and in one foot increments from 10 to 295 feet
- Enable multiple termination types including, pre-terminated cassettes, jack modules, modular plugs, plug pack and/or unterminated options
- Pre-terminated cassettes snap in and out of QuickNet™ Patch Panels
- Quality assurance label includes serialized number for future traceability, performance level, and assembly length

Ready to Order parts in common lengths and configurations

Simple 3 – Step process to obtain ordering information for QuickNet™ Standard Assembly:

- 1. Choose Performance Level of Cable Assembly
- 2. Choose Riser or Plenum Cable Type
- 3. Select desired length of assembly from those listed and replace "nn" with that length

Performance Level and Description	Cable Type	Part Number Template	Available Assembly Lengths (in feet)
Category 6A UTP QuickNet™ Cable Assembly made with	Riser	QZRBCBCBXX <u>nn</u>	
TX6A [™] 10Gig [™] UTP Copper Cable with MaTriX Technology and pre-terminated TX6A [™] 10Gig [™] UTP Jack Module Cassettes on each end.	Plenum	QZPBCBCBXX <u>nn</u>	
Category 6A SDUTP QuickNet™ Cable Assembly made with TX6A-SD™ 10Gig™ UTP Copper	Riser	QXRBCBCBXX <i>nn</i>	<u>nn</u> = 10, 15, 20, 25, 30, 35, 40, 45, 50,
Cable with MaTriX Technology and pre-terminated TX6A™ 10Gig™ UTP Jack Module Cassettes on each end.	Plenum	QXPBCBCBXX <u>nn</u>	55, 60, 65, 70, 75 or 80
Category 6 UTP QuickNet™ Cable Assembly made	Riser	QCRBCBCBXX <u>nn</u>	
with Category 6 UTP Cable and pre-terminated TX6™ PLUS UTP Jack Module Cassettes on each end.	Plenum	QCPBCBCBXX <u>nn</u>	

Termination Options



Pre-Terminated UTP Cassette



Modular Plugs



Pre-Terminated Shielded Cassette



Plug Pack



Jack Modules



Un-Terminated

Copper Systems


C. Fiber **Optic** Systems

> Power over

Ethernet

E.

Zone Cabling

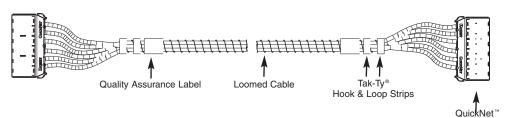

Ordering Information

Part Number



2















F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> Q. Index

> > **B.9**

Example:

Example – The above part number is a 10 foot QuickNet ™ Cable Assembly constructed of Category 6A, UTP,

plenum cable (blue) with a pre-terminated cassette (blue jacks installed) on each end.

5

9

Pre-Terminated Cassette

1 - Q = QuickNet™

2 - Performance Level

B = Category 6 Enhanced UTP

C = Category 6 UTP

E = Category 6A (TX6A™ 10Gig™) Shielded

X = Category 6A (TX6A-SD[™] 10Gig[™]) UTP MaTriX

Z = Category 6A (TX6A[™] 10Gig[™]) UTP MaTriX

3 - Flame/Smoke Rating

R = Riser or P = Plenum

4 - Cable Color

B = Blue or W = White

5 - Termination End 1

C = Cassette

J = Jack modules

P = Modular plugs

K = Jack modules staggered right

L = Jack modules staggered left

Q = Modular plugs staggered right

S = Modular plugs staggered left

6 - Termination End 1 Color Options

Jack Module Color Options

B = Blue, E = Electric Ivory, G = Green, H = Off White, I = International Gray, L = Black, O = Orange, R = Red, V = Violet, W = White, Y = Yellow Shielded Jack Modules, chose option L (all Shielded

X = No color option available, all modular plugs are clear

Jack Modules are Black) **Modular Plug and Unterminated Color Options**

7 - Termination End 2

C = Cassette

J = Jack modules

P = Modular plugs A = Plug pack (6-pack)

R = Recessed plug pack (6-pack)

K = Jack modules staggered right

L = Jack modules staggered left

Q = Modular plugs staggered right

S = Modular plugs staggered left

U = Unterminated

O = Unterminated with cassette and jack modules for on-site termination

8 - Termination End 2 Color Options

Jack Module Color Options

B = Blue, E = Electric Ivory, G = Green, H = Off White, I = International Gray, L = Black, O = Orange, R = Red, V = Violet, W = White, Y = Yellow

Shielded Jack Modules, chose option L (all Shielded Jack Modules are Black)

Plug Pack Color Options

B = Blue, W = White, R = Red, L = Black

Recessed Plug Pack Color Option

S = Silver

Modular Plug and Unterminated Color Option

X = No color option available, all modular plugs are clear

9 - Assembly Options

P = Pulling eve

X = No assembly options requested

10 - Custom Labeling*

L = Custom assembly label

C = Custom cable labels

B = Custom assembly and cable labels

X = No custom labels requested

11 - Assembly Length**

10' to 295' (one foot increments)

^{*}Custom cable assembly labels are available up to eighteen characters; individual cable labels are available up to fifteen characters. **For cable assemblies constructed of Category 6A (TX6A-SD™ 10Gig™) UTP MaTriX Copper Cable, the maximum length is 196 ft. (60m). All connectivity is wired T568B. Category 6 Enhanced Performance level utilizes Panduit® TX6500 " Category 6 UTP Cable. Permanent link test results shipped with each cable assembly.

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

QuickNet™ Plug Pack Cable Assemblies

- Facilitate quick and easy connection and disconnection of multiple patch cords, simultaneously to a variety of switches, reducing time and cost associated when installing and maintaining structured cabling links
- Available in 6, 8, or 12-pack configurations for optimal switch compatibility
- Recessed version available when additional clearance is required at the switchport
- Available in Category 6A and Category 6 Performance levels for UTP installations and Category 6A shielded installations
- Plug meets all applicable FCC part 68 Subpart F requirements and exceeds IEC 60603-7 specifications
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each patch cord is 100% performance tested
- Integrated finger latch enables quick, one-handed installation and removal from switch

- Low profile design allows assemblies to be installed side by side or stacked on top of each other providing maximum port density in high density installations
- Marker ties enable easy identification in high density installations and provides additional level of security when used with optional lock in device
- Labels on patch cords provide identification of performance level, length, and quality control number
- Optional removal tool (QPPRT) facilitates removal of individual cable links without disrupting service to other network connections
- Optional lock in device (QPPLD6-X and QPPLD8-X) prevents unintentional removal of assembly from the switch for an additional level of security
- UTP cable available in blue or white; shielded cable available in blue or international gray
- Plug packs available in blue or white; recessed version available in silver



6-Pack Plug Pack



8-Pack Plug Pack



12-Pack Plug Pack




6-Pack Recessed Plug Pack

0-Fack Fit	y rack	o-rack riug rack		12-Fack Fit	iy rack	0-Fac	K Hec	,esseu	riug	racr
			Cable	Termination		Termination	Lei	ngth	Std. Pkg.	Std.
Part Number	Pa	rt Description	Color	End 1	Color	End 2	Ft.	m	Qty.	
Category 6A U	TP									
QPAZCBAB07	with Category 6A,	ack Cable Assembly made CM blue UTP cable with a back on one end and modular rend.	Blue	Modular Plugs	Blue Plug Pack	Plug Pack with Modular Plugs	7	2.13	1	10
Category 6A S	hielded									
QPPEDBAB07	with Category 6A, shielded cable wit	ack Cable Assembly made dual rated (CM/LSZH) blue h a 6-pack blue plug pack on ular plugs on the other end.	Blue	Modular Plugs	Blue Plug Pack	Plug Pack with Modular Plugs	7	2.13	1	10
Category 6 UT	P									
QPPCCBAB07	with Category 6, 0	ack Cable Assembly made CM blue cable with a 6-pack one end and modular plugs	Blue	Modular Plugs	Blue Plug Pack	Plug Pack with Modular Plugs	7	2.13	1	10

Removal tool available on page B.13. Lock in device available on page B.13.

The above part numbers in the table represent 6 pack QuickNet[™] Plug Pack assemblies. To build your own standard part number, see the configurator on the facing page.

QuickNet™ Plug Pack Cable Assembly Ordering Information

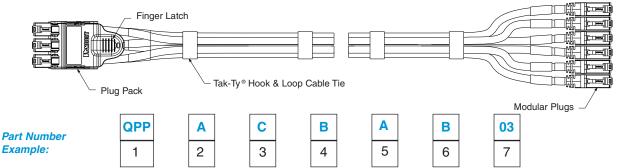

Example – The above part number is a 3 foot QuickNet™ Plug Pack Cable Assembly constructed of Category 6A, UTP, CM cable (blue) with a 6 plug pack (blue) on one end and modular plugs on the other end.

1 - QuickNet™ Plug Pack Assembly (QPP)

2 - Performance Level

- A = Category 6A (TX6A[™]10Gig[™]) UTP MaTriX
- X = Category 6A (TX6A-SD[™]10Gig[™]) UTP MaTriX
- E = Category 6A (10Gig™)/Category 6 Shielded*
- C = Category 6 UTP

3 - Flame/Smoke Rating

- C = CM (UTP only)
- D = Dual rated CM and LSZH (shielded only)

4 - Cable Color

B = Blue

W = White (UTP only)

G = International Gray (shielded only)

5 - Plug Pack Configuration

A = 6-pack

B = 12-pack

D = 8-pack

R = Recessed 6-pack

6 - Plug Pack Color

B = Blue

W = White

S = Silver (Recessed version only)

7 - Assembly Length

03 = 3 feet

05 = 5 feet

07 = 7 feet 10 = 10 feet

14 = 14 feet

All UTP cable is available in CM Flame/Smoke Rating. *All shielded cable is dual rated for CM and LSZH applications.

Component Labels for QuickNet™ Plug Pack Assemblies



Suggested Label Solutions for TIA/EIA-606-A Compliance							
Part Number	Laser/Ink Jet Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label				
All QuickNet™ Plug Pack Assemblies	C125X030FJJ	C125X030YPT	C125X030FJC	T050X000VPC-BK			

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Copper Systems

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

B. Copper **Systems**

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead & Underfloor Routing

Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & **Bonding**

> N. Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

QuickNet™Patch Panels and Accessories

- Accept QuickNet[™] Copper Cable Assemblies and QuickNet™ SFQ Series MTP* Fiber Optic Cassettes which snap in and out with one hand
- High-density patch panels conserve valuable rack space
- Angled patch panels facilitate proper bend radius control and minimize the need for horizontal cable managers
- Pre-printed numbers above each port for easy identification
- Mount to standard EIA 19" racks or 23" racks with optional extender brackets
- Zero RU brackets (FQCBRUA) mount up to two QuickNet™ Cassettes directly to rack or enclosure without utilizing additional rack space

- Optional patch panel adapter (QPPABL) accepts all Mini-Com® Modules for UTP, fiber optic, and audio/visual applications
- Optional patch panel blank (QPPBBL) promotes proper airflow and cooling
- Label/label cover kit (QPPLC24) provides port and panel identification for 24-port patch panels
- QuickNet[™] All Metal Modular Patch Panels accept shielded cassettes with no grounding kit required
- If not using QuickNet™ All Metal Modular Patch Panels, optional retrofit grounding kit (QNSMRRT) is required to ground shielded cassettes to QuickNet™ Modular Patch Panels









QASP48HDBL

: :
QPP24BL
QSP24BL
Q3F24BL
QPP48HDBL
GEF40NDDL



QSP48HDBL



QPPABL



Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	
QuickNet [™] Angle	d Patch Panels			
QAPP24BL	24-port angled patch panel which accepts QuickNet™ Pre-Terminated Cassettes and Patch Panel Adapters.	1	1	10
QASP24BL	24-port, all metal angled patch panel which accepts QuickNet™ Pre-Terminated Shielded Cassettes and Patch Panel Adapters.	1	1	10
QAPP48HDBL	48-port angled patch panel which accepts QuickNet™ Pre-Terminated Cassettes and Patch Panel Adapters.	1	1	10
QAPP48HDVNSBL	48-port angled patch panel which accepts QuickNet™ Pre-Terminated Cassettes and Patch Panel Adapters. Numbering sequence is top to bottom across patch panel.	1	1	10
QASP48HDBL	48-port, all metal angled patch panel which accepts QuickNet™ Pre-Terminated Shielded Cassettes and Patch Panel Adapters.	1	1	10
QuickNet™ Flat P	atch Panels			

QuickNet™	Flat P	atch	Panels
QPP24BI		24-n	ort natch

	QPP24BL	24-port patch panel which accepts QuickNet [™] Pre-Terminated Cassettes and Patch Panel Adapters.	1	1	10
TOO OF THE PERSON NAMED IN COLUMN NAMED IN COL	QSP24BL	24-port, all metal patch panel which accepts QuickNet™ Pre-Terminated Shielded Cassettes and Patch Panel Adapters.	1	1	10
	QPP48HDBL	48-port patch panel which accepts QuickNet [™] Pre-Terminated Cassettes and Patch Panel Adapters.	1	1	10
	QPP48HDVNSBL	48-port patch panel which accepts QuickNet ™ Pre-Terminated Cassettes and Patch Panel Adapters. Numbering sequence is top to bottom across patch panel.	1	1	10
	QSP48HDBL	48-port, all metal patch panel which accepts QuickNet™ Pre-Terminated Shielded Cassettes and Patch Panel Adapters.	1	1	10

Patch Panel Adapter

QPPABL	QuickNet™ Patch Panel Adapter which accepts	 1	10
	Mini-Com® Modules for UTP, fiber optic, and audio/visual applications.		

Patch Panel Blank

QPPBBL	QuickNet™ Patch Panel Blank reserves space for	_	1	10
	future use and promotes proper airflow and cooling.			

Patch Panel Label Kit

	atom and adopt the						
QPPLC24	Label/label cover kit for 24-port QuickNet™ Patch	_	1	10			
	Panels. Each kit contains four labels and four clear						
	label covers per bag.						

^{*}MTP is a registered trademark of US Conec Ltd.

[^]One rack space = 1.75" (44.45mm). M6 and #12-24 mounting screws included. QuickNet™ Pre-Terminated Cable Assemblies available on pages B.8 - B.9. QuickNet™ SFQ Series MTP* Fiber Optic Cassettes available on page C.45.

QuickNet™ Plug Pack Housings

- · Facilitate guick and easy connection and disconnection of multiple patch cords, simultaneously to a variety of switches, reducing time and cost associated when installing and maintaining structured cabling links
- Available in 6, 8, or 12-pack configurations for optimal switch compatibility
- · Recessed version available when additional clearance is required at the switch port
- Integrated finger latch enables quick, one-handed installation and removal from switch
- · Low profile design allows assemblies to be installed side by side or stacked on top of each other providing maximum port density in high density installations

- Marker ties enable easy identification in high density installations and provides additional level of security when used with optional lock in device
- · Optional removal tool (QPPRT) facilitates removal of individual cable links without disrupting service to other network connections
- Optional lock in device (QPPLD6-X or QPPLD8-X) prevents unintentional removal of assembly from the switch for an additional level of security



QPPN6BU



QPPNR6S

Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
QPPN6BU*	QuickNet™ Plug Pack accepts six Panduit RJ45 modular plugs.	1	10
QPPN8BU*	QuickNet™ Plug Pack accepts eight Panduit RJ45 modular plugs.	1	10
QPPN12BU*	QuickNet™ Plug Pack accepts twelve Panduit RJ45 modular plugs.	1	10
QPPNR6S	QuickNet™ Recessed Plug Pack accepts six Panduit RJ45 modular plugs.	1	10

^{*}For standard colors other than BU (Blue), replace BU in part number with BL (Black), RD (Red), or WH(White). Recessed Plug Pack available in silver only.

QuickNet™ Plug Pack Removal Tool

- Allows individual patch cords to be removed from a plug pack without disruption of other network connections
- Compatible with 6, 8, and 12-pack QuickNet[™] Plug Pack Assemblies



Part Number	Part Description	Std. Pkg. Qty.
QPPRT	Removal tool allows individual patch cords to be removed from a plug pack without disruption of other network connections.	1

QuickNet™ Plug Pack Assemblies available on pages B.10 and B.11.

QuickNet™ Plug Pack Lock-in Device

- Prevents unintentional removal of QuickNet[™] Plug Pack Assembly from the switch
- · Marker tie (included with assembly) can be used to connect plug pack and lock-in device for additional level of security
- Two recommended per plug pack



QPPLD6-X

Part Number	Part Description	Pkg.	Std. Ctn. Qty.
QPPLD6-X	Lock-in device prevents unauthorized removal of patch cords from 6 and 12-pack plug pack.	10	100
QPPLD8-X	Lock-in device prevents unauthorized removal of patch cords from 8-pack plug pack. Recommended quantity two per 8-pack.	10	100

Recommended quantity two QPPLD6 per 6-pack plug pack, four QPPLD6 per 12-pack plug pack, and two QPPLD8 per 8-plug pack plug pack.

QuickNet™ Plug Pack Assemblies available on pages B.10 and B.11.

Copper Systems

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

> > B.13

B. Copper **Systems**

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding 8 Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

TX6A™ 10Gig™ U/FTP Shielded Copper Cable

- Exceeds requirements of ANSI/TIA-568-C.2 Category 6A, IEEE 802.3an-2006, and ISO 11801 Class EA channel standards
- Exceeds requirements of ANSI/TIA-568-C.2 Category 6A and IEC 61156-5 Category 6A component standards
- Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Cable diameter: Riser 0.308 in. (7.8mm) nominal, Plenum 0.295 in. (7.5mm) nominal
- Installation temperature range: 32°F to 140°F (0°C to 60°C)
- Operating temperature range: 14°F to 140°F (-10°C to 60°C)
- Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap

Ctd Ctd



Part Number	Part Description	Color‡	Std. Pkg. Qty. (Ft.)	Std. Ctn. Qty. (Ft.)
Riser				
PUFR6X04BU-UG	Category 6A, riser (CMR), 4-pair, U/FTP shielded copper cable. Copper conductors are 23 AWG with HDPE insulation. Conductors are twisted in pairs, each individual twisted pair includes a metallic foil shield and is protected by a flame-retardant PVC jacket.	Blue	1000	15000
Plenum				
PUFP6X04BU-UG	Category 6A, plenum (CMP), 4-pair, U/FTP shielded copper cable. Copper conductors are 23 AWG with FEP insulation. Conductors are twisted in pairs, each individual twisted pair includes a metallic foil shield and is protected by a low smoke, flame-retardant PVC jacket.	Blue	1000	15000


‡For standard colors other than Blue, replace BU (Blue) with WH (White), YL (Yellow), or IG (International Gray). Order number of pieces required, in multiples of 5,000 feet.

Must be installed as part of a complete TX6A™10Gig™ Copper Cabling System in order to achieve 10GBASE-T certified performance.

In data center and telecommunication room applications, Panduit recommends that both-ends of shielded cable link be bonded if the channel is contained in the same building and any multiple serving AC power systems are inter-system bonded. For workstation applications, it is recommended that the cable link be bonded through the normal process in the telecommunication room and through the patch cord at the workstation, which provides the proper path to ground via the computer's AC power plug.

TX6A™ 10Gig™ Shielded F/UTP Copper Cable

- · Exceeds requirements of ANSI/TIA-568-C.2 Category 6A, IEEE 802.3an-2006, and ISO 11801 Class EA channel standards
- Exceeds requirements of ANSI/TIA-568-C.2 Category 6A and IEC 61156-5 Category 6A component standards
- Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Cable diameter 0.284 in. (7.2mm) nominal
- Installation temperature range: -20°F to 75°F (-4°C to 167°C) during installation and operation
- · Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap



Part Number	Part Description	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
PFR6X04BU-CG	Category 6A riser (CMR) 4-pair F/UTP shielded copper cable. Conductors are 23 AWG with PE insulation. Conductors are twisted in pairs, separated by an integrated pair separator, all four pairs surrounded by an overall metallic foil shield and protected by a low smoke zero halogen jacket.	Blue	1000	27000

‡For standard colors other than Blue, replace BU (Blue) with WH (White).

Order number of pieces required, in multiples of 9,000 feet.

Must be installed as part of a complete TX6A™ 10Gig™ Copper Cabling System in order to achieve 10GBASE-T certified performance.

In data center and telecommunication room applications, Panduit recommends that both-ends of shielded cable link be bonded if the channel is contained in the same building and any multiple serving AC power systems are inter-system bonded. For workstation applications, it is recommended that the cable link be bonded through the normal process in the telecommunication room and through the patch cord at the workstation, which provides the proper path to ground via the computer's AC power plug.

- Exceeds requirements of ISO 11801 Class E_A and ANSI/TIA-568-C.2 Category 6A channel standards
- Meets or exceeds the requirements of IEC 61156-5 Category 7 component standards at swept frequencies up to 600 MHz
- Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- · Robust cable jacket oil and fuel resistant for harsh environments
- Flame rated to meet IEC 60754-1, IEC 60754-2, IEC 61034-2, IEC 60332-3-24
- Chemical resistance tested to mineral oil IRM 902 (IEC 60811-2-1) and diesel fuel IRM 903 (IEC 60811-2-1)
- Third party tested to exceed the application requirements of Det Norske Veritas, American Bureau of Shipping, and ETL

- DNV certification number E-10447
- ABS certification number 10-HS638424-1-PDA
- Ideal for harsh environments encountered in marine applications, including ship and offshore/onshore units
- Cable diameter 8.2 mm (0.322 in) nominal
- Installation temperature range: -15°C to 50°C (5°F to 122°F)
- Operating temperature range: -40°C to 85°C (-40°F to 185°F)
- Descending cable length markings enable easy identification of remaining cable which reduces installation time and cable scrap
- · Packaged on a reel



PSM7004BU

Part Number	Part Description	Color	Pkg. Qty. (Ft.)	Ctn. Qty. (Ft.)
PSM7004BU-KD	Category 7 low smoke, halogen free, fire retardant (LSHF-FR), 4-pair S/FTP shielded marine copper cable. Stranded copper conductors are 4 x 2/0.27mm². Conductors are twisted in pairs, each individual twisted pair is surrounded by a foil, covered with an overall braided shield and is protected by an oil and fuel resistant, low smoke, halogen free, and fire retardant jacket.	Blue	1640	19680
PSM7004BU-KM	Category 7 low smoke, halogen free, fire retardant (LSHF-FR), 4-pair S/FTP shielded marine copper cable. Stranded copper conductors are 4 x 2/0.27mm². Conductors are twisted in pairs, each individual twisted pair is surrounded by a foil, covered with an overall braided shield and is protected by an oil and fuel resistant, low smoke, halogen free, and fire retardant jacket.	Blue	3280	13120

Order number of pieces required, in multiples of 13,120 feet.

Must be installed as part of a complete TX6A™ 10Gig™ Copper Cabling System in order to achieve 10GBASE-T certified performance.

Labels for Cable



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Cable Part NumberLaser/Ink Jet Desktop Printer LabelTDP43ME Thermal Transfer Desktop Printer LabelPanTher™ LS8E Hand-Held Printer LabelCougar™ LS9 Hand-Held Printer Label						
All cable on pages B.10, B.11 and B.19	S100X225YAJ	S100X225VATY	S100X225VAC	T100X000CBC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

В.	
Coppe	21
Systen	n

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media

Distribution

Std.

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding 8 Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

ւայ 🔒 Mini-Com® TX6A™ 10Gig™ Shielded Jack Modules

- Exceed requirements of ANSI/TIA-568-C.2 Category 6A, IEEE 802.3an-2006, and ISO 11801 Class E_A channel standards
- Exceed requirements of ANSI/TIA-568-C.2 Category 6A and IEC 61156-5 Category 6_A component standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Color-coded, keyed jack modules mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed modular plugs accommodating more discrete networks
- Each jack is 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Utilize patent-pending enhanced Giga-TX[™] Technology for jack terminations which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- Fully grounded and bonded to patch panel when installed in Panduit All Metal Modular Patch Panel
- Contacts plated with 50 microinches of gold for superior performance
- No punchdown tool required; termination tool (EGJT) ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability

- Optional termination tool (TGJT) reduces termination time by 25%, ideal for high volume installations
- Can be re-terminated a minimum of twenty times
- Blue termination cap designates 10Gig[™] Category 6A performance and provides positive strain relief; helps control cable bend radius and securely retains wires
- Terminate 4-pair, 22 26 AWG, 100 ohm, solid or stranded shielded twisted pair cable
- Universal termination cap is color-coded for T568A and T568B wiring schemes
- Integrated strain relief with wire cap provides 360° conductive path for grounding
- 0.187 in. grounding tab provides conductive patch for grounding individual jacks
- Accept 6 and 8-position modular plugs without damage
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use



CJS6X88TGY



CJSK6X88TGBL

Part Number	Part Description	No. of Module Spaces	Color	Pkg.		
Jack Module						
CJS6X88TGY	Category 6A, RJ45, 10 Gb/s, 8-position, 8-wire universal shielded black module with integral shield.	1	Black	1	50	
Keyed Jack Module						
CJSK6X88TGBL*	Keyed, Category 6A, RJ45, 10 Gb/s, 8-position,	1	Black	1	50	

*For standard colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), VL (Violet), or GY (Gray). Each color representing a different keyed configuration. Termination tools available on page B.97.

8-wire universal shielded module with

Shield grounding requires proper installation of shielded jack module and the use of shielded patch cords and cable

For grounding shielded modules not installed in a shielded patch panel, see the shielded jack module grounding kit, CJSGK-XY on page M.23.

All Metal Modular Patch Panels available on page B.73.

integral shield.

RJ45 blockout device available on page B.92.

Dust cap available on page B.97.

Contact customer service for bulk packaged jack modules.

Must be installed as part of a complete TX6A™ 10Gig™ Copper Cabling System in order to achieve 10GBASE-T certified performance.

B.16

B. Copper

Systems

C.

Fiber **Optic** Systems

Power over Ethernet

E.

Zone Cabling

F. Wireless



շ(Կ)սs (Mini-Com® TX6A™ 10Gig™ Shielded Jack Modules (continued)

Keyed Geometry





















Black Key

Red Key

Green Key

Yellow Key

Orange Key

Key

Blue Key

Violet Key

Intl. Gray Key





Key



Green

Key



Key







Key





Intl. Gray Key Key

Black Key

Media

Distribution

G. Outlets

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

Q. Index

Component Labels for Mini-Com® TX6A™ 10Gig™ Shielded Jack Modules



	Suggested Lat	bel Solutions for TIA/EIA-60	06-A Compliance	
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label
CJS6X88TGY CJSK6X88TGBL	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

B. Copper **Systems**

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. Physical Infrastructure Managemen

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification


Cable Managemen Accessories

Index

ւայա 📵 TX6A™ 10Gig™ Shielded Patch Cords

- Exceed requirements of ANSI/TIA-568-C.2 Category 6A, IEEE 802.3an-2006, and ISO 11801 Class E₄ channel standards
- Exceed requirements of ANSI/TIA-568-C.2 Category 6A and ISO 11801 Class EA component standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- · Color-coded, keyed modular plugs mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed jack modules accommodating more discrete networks
- Each patch cord is 100% performance tested to component limits and wired T568B
- Constructed of 26 AWG stranded shielded copper cable (nominal cable diameter is 0.23 in.) and TX6[™] PLUS Shielded Modular Plugs for superior performance
- · Cable includes overall metal shield that provides conductive path for grounding

- Plug meets all applicable ANSI/TIA-968-A requirements and exceeds IEC 60603-7 specifications
- Plug uses an integral pair manager to optimize performance and consistency by reducing untwisting of conductors within the plug
- Plug performance in center of TIA/EIA component range. ensuring interoperability and 10GBASE-T Ethernet channel performance
- Labels on patch cords provide identification of performance level, length, and quality control number
- Patented tangle-free latch prevents snags and provides easy release, saving time on frequent moves, adds, and changes
- · Optional patch cord color bands snap on and off individual patch cables offering endless color-coding options
- Optional RJ45 plug lock-in device blocks unauthorized removal of cable, IP phone, other networking equipment, or critical connection

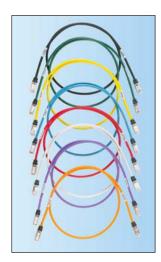

Part Number	Part Description	Length (Ft.)	Cable Color	Std. Pkg. Qty.		
Patch Cord						
STP6X3IG‡	Category 6A, 10 Gb/s S/FTP patch cord with TX6™ PLUS Modular Plugs on each end.	3	Off White	1	10	
Keyed Patch	Cord					
STPK6X3BL*	Keyed, Category 6A, shielded patch cord with TX6™ PLUS Keyed Modular Plug on one end and TX6™ Non-Keyed Modular Plug on the other end.	3	Black	1	10	

‡For lengths 2 to 20 feet (increments of one foot) and 25, 30, 35, 40 feet change the length designation in the part number to the desired length. For standard cable colors other than IG (International Gray) replace IG suffix with BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) to end of part number. For example, the part number for a blue 15-foot patch cord is STP6X15BU.

*For lengths other than 3 feet (5, 7, 10, 14 feet) change the length designation in the part number to the desired length. For standard cable colors other than Black, replace suffix BL (Black) with BU (Blue), RD (red), YL (Yellow), GR (Green) or OR (Orange), each color representing a different keyed configuration.

Contact customer service for universal reference patch cords.

Patch cord color bands available on page B.96.

RJ45 plug lock-in device available on page B.94.

Must be installed as part of a complete TX6A™ 10Gig™ Copper Cabling System in order to achieve 10GBASE-T certified performance.

Labels for TX6A™ 10Gig™ Shielded Patch Cords



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Cord Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label	
All Patch Cords	S100X150YAJ	S100X150VATY	S100X150VAC	T100X000CBC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.





TX6A™ 10Gig™ and TX6A-SD™ 10Gig™ UTP Copper Cable with MaTrix Technology

- Exceeds requirements of ANSI/TIA-568-C.2 Category 6A, IEEE 802.3an-2006, and ISO 11801 Class E_A channel
- Exceeds requirements of ANSI/TIA-568-C.2 Category 6A and IEC 61156-5 Category 6_△ component standards
- Superior headroom warranty provides the highest margins above the industry standard for both electrical and alien crosstalk performance
- Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Patented cable with MaTriX Technology suppresses alien crosstalk with enhanced internal electrical performance
- Round cable design with reduced cable diameter enables improved cable bundling and optimizes fill capacity

- TX6A™ 10Gig™ UTP Copper Cable available for distances up to 100 meters; cable diameter 0.295 in. (7.5mm) nominal
- TX6A-SD™ 10Gig™ UTP Copper Cable available for distances up to 70 meters, offering smaller cable diameter comparable to Category 6 cable; cable diameter 0.240 in.
- Installation temperature range: 32°F to 140°F (0°C to 60°C)
- Operating temperature range: -4°F to 167°F (-20°C to 75°C)
- Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap



PUP6A04BU-UG

Part Number	Part Description	Color	Pkg. Qty. (Ft.)	Ctn. Qty. (Ft.)
TX6A™ 10Gig™ UTP C	Copper Cable (100 meter solution)			
PUP6A04BU-UG [‡]	Category 6A, plenum (CMP), 4-pair, UTP copper cable. Copper conductors are 23 AWG with FEP insulation. Conductors are twisted in pairs, separated by an integrated pair divider, surrounded by a patent-pending MaTriX tape and protected by a low-smoke flame-retardant PVC jacket.	Blue	1000	18000
PUR6A04BU-UG ^{‡1}	Category 6A, riser (CMR), 4-pair, UTP copper cable. Copper conductors are 23 AWG with flame-retardant PE insulation. Conductors are twisted in pairs, separated by an integrated pair divider, surrounded by a patent-pending MaTriX tape and protected by a flame-retardant PVC jacket.	Blue	1000	18000



PUP6ASD04BU-UG

	,			
TX6A-SD™ 10Gig™ U	TP Copper Cable (70 meter solution)			
PUP6ASD04BU-UG*	Category 6A, riser (CMR), 4-pair, UTP copper cable. Copper conductors are 26 AWG with flame-retardant PVC insulation. Conductors are twisted in pairs, separated by an integrated pair divider, surrounded by a patent-pending MaTriX tape and protected by a flame-retardant PVC jacket. Ideal for installations up to 70 meters. Smallest diameter Category 6A UTP cable on the market at 0.240 in. (6.1mm).	Blue	1000	18000
PUR6ASD04BU-CG [‡]	Category 6A, riser (CMR), 4-pair, UTP copper cable. Copper conductors are 26 AWG with flame-retardant PVC insulation. Conductors are twisted in pairs, separated by an integrated pair divider, surrounded by a patent-pending MaTriX tape and protected by a flame-retardant PVC jacket. Ideal for installations up to 70 meters.	Blue	1000	18000

‡For standard colors other than Blue, replace BU (Blue) with WH (White), YL (Yellow), or IG (International Gray).

Order number of pieces required, in multiples of 9,000 feet.

Must be installed as part of a complete TX6A™ 10Gig™ Copper Cabling System in order to achieve 10GBASE-T certified performance.

Reference page B.15 for appropriate labeling solution.

Copper Systems

C. Fiber Optic 0 Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Std.

Std.

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

¹ Substitute PUR6A04BU-CG‡ for alternative manufacturing location.

R. Copper **Systems**

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Managemen

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

M. **Grounding & Bonding**

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

Lew Mini-Com® TX6A™ 10Gig™ UTP Jack Module

- Exceed requirements of ANSI/TIA-568-C.2 Category 6A, IEEE 802.3an-2006, and ISO 11801 Class EA channel standards
- Exceed ANSI/TIA-568-C.2 Category 6A and IEC 61156-5 Category 6A component standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- MaTriX split foil technology provides superior suppression of alien crosstalk (PSANEXT and PSAACRF)
- Superior headroom warranty provides the highest margins above the industry standard for both electrical and alien crosstalk performance
- · Color-coded, keyed jack modules mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed modular plugs accommodating more discrete networks
- Each jack is 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Utilize patent-pending enhanced Giga-TX[™] Technology for iack terminations which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- Contacts plated with 50 microinches of gold for superior performance
- No punchdown tool required; termination tool (EGJT) ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability

- Optional termination tool (TGJT) reduces termination time by 25%, ideal for high volume installations
- Can be re-terminated a minimum of twenty times
- Blue termination cap designates Category 6A performance and provides positive strain relief; helps control cable bend radius and securely retains wires
- Terminate 4-pair, 22 26 AWG, 100 ohm, solid or stranded twisted pair cable
- Universal termination cap is color-coded for T568A and T568B wiring schemes
- Accept 6 and 8-position modular plugs without damage
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use



CJ6X88TGIW



CJK6X88TGBL

Part Number	Part Description	No. of Module Spaces	Color‡	Pkg.	Std. Ctn. Qty.
Jack Module					
CJ6X88TGIW‡	Category 6A, RJ45, 10 Gb/s, 8-position, 8-wire universal module. Includes patent pending MaTriX split foil tape.	1	Off White	1	50
Keyed Jack Mo	dule				
CJK6X88TGBL*	Keyed, Category 6A, RJ45, 10 Gb/s, 8-position, 8-wire universal module. Includes patent pending MaTriX split foil tape	1	Black	1	50

‡For standard colors other than Off White, replace suffix IW (Off White) with EI (Electric Ivory), WH (White), AW (Arctic White), IG (International Gray), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow) or

*For standard colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), or OR (Orange), each color representing a different keyed configuration.

Termination tools available on page B.97.

RJ45 blockout device available on page B.92

Dust cap available on page B.97.

Contact customer service for bulk packaged jack modules.

Must be installed as part of a complete TX6A™ 10Gig™ UTP Copper Cabling System in order to achieve 10GBASE-T certified performance.

A. System Overview

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

Cable Management Accessories

> Q. Index

շան Mini-Com® TX6A™ 10Gig™ UTP Jack Modules (continued)

Keyed Geometry





Red

Key



Green

Key



Yellow

Key





Orange Key

Blue Key



Black

Key

Key



Key



Green

Key





Yellow Key

Orange Key

Blue Key

Component Labels for Mini-Com® TX6A™ 10Gig™ UTP Jack Modules



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label	
All TX6A [™] 10Gig [™] Jack Modules	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

R. Copper **Systems**

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemer

J. Overhead 8 Underflooi Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Managemen Accessories

> 0. Index

DP6A™ 10Gig™ UTP Patch Panels

- Exceed requirements of ANSI/TIA-568-C.2 Category 6A, IEEE 802.3an-2006, and ISO 11801 Class E_{Δ} channel standards
- Exceed requirements of ANSI/TIA-568-C.2 Category 6A and IEC 61156-5 Category 6A component standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each port is 100% tested to ensure NEXT and RL performance and is individually serialized to support traceability
- Utilize 110 punchdown termination on back panel and include retention cap for each port
- Each port contains a universal label that is color-coded for T568A and T568B wiring schemes

- · Contacts plated with 50 microinches of gold for superior performance
- · Angled versions allow for higher density applications by easily routing the patch cords to each side of the panel eliminating the need for horizontal cable management
- Terminate 4-pair, 22 26 AWG, 100 ohm, solid or stranded twisted pair cable
- Mount to standard EIA 19" rack or 23" racks with optional extender bracket
- Write-on areas for port and panel identification
- · Can be clearly identified with labels and icons
- Optional label kits (DPLK24 and DPLK48) contain adhesive label holder and labels for easy port and panel identification



DPA246X88TGY



DPA486X88TGY





DP486X88TGY

			No. of Rack		Std. Ctn.
	Part Number	Part Description	Spaces^	Qty.	Qty.
ΕD	DP6A [™] 10Gig [™]	Angled Patch Panels			
	DPA246X88TGY	24-port, angled, Category 6A, 10 Gb/s patch panel with 24 RJ45 8-position, 8-wire ports.	1	1	10
i	DPA486X88TGY	48-port, angled, Category 6A, 10 Gb/s patch panel with 48 RJ45 8-position, 8-wire ports.	2	1	10
	DP6A™ 10Gig™	Flat Patch Panels			
1	DP246X88TGY	24-port, Category 6A, 10 Gb/s patch panel with 24 RJ45 8-position, 8-wire ports.	1	1	10
,	DP486X88TGY	48-port, Category 6A, 10 Gb/s patch panel with 48 RJ45 8-position, 8-wire ports.	2	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Replaceable punchdown modules available, part number DRJ6X88TGBL.

Termination tool (PDT110) available on page B.91.

Must be installed as part of a complete TX6A™ 10Gig™ Copper Cabling System in order to achieve 10GBASE-T certified performance.

Component Labels for DP6A™ 10Gig® UTP Patch Panels



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Patch Panel Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
All Patch Panels on this Page	C379X030FJJ	C379X030YPT	C379X030FJC	T031X000FJC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Copper Systems

NEW!

C. Fiber Optic 0 Systems

Power over **Ethernet**

E. Zone Cabling

F.	
Virel	ess

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> Q. Index

Mini-Com® Category 6A UTP Coupler Module

- Designed to exceed performance requirements of the ANSI/TIA-568-C.2 Category 6A and ISO 11801 2nd Edition Class E_A channel standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- RJ45 8-position, 8-wire female to RJ45 8-position, 8-wire female pass-through module provides fast and easy plug and play connection of 6 and 8-position RJ45 patch cords
- · No tools required
- 100% tested to ensure NEXT and RL performance and is individually serialized for traceability

- · Contacts plated with 50 microinches of gold for superior performance
- · Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels and Faceplates; not suitable for surface mount box applications
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use



Part Number	Part Description	No. of Module Spaces	Color	Std. Pkg. Qty.	
CC6X88IW	Category 6A, RJ45, 8-position, 8-wire universal coupler module.	1	Off White	1	50

‡For other colors replace suffix IW (Off White) with BL (Black). Acts as one connecting hardware component in channel. RJ45 blockout device available on page B.92. Dust cap available on page B.97. TX6A™ 10Gig™ UTP Patch Cords available on page B.25.

Component Labels for Mini-Com® Category 6A UTP Coupler Module



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
CC6X88IW	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.



B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

Wireless

F.

Outlets

G.

Distribution I.

Media

Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industria

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Category 6A Coupler Patch Panel

- Coupler panel ports provide fast and easy plug and play connection of 6 and 8-position RJ45 patch cords
- No tools required

NEW!

- Designed to exceed performance requirements of the ANSI/TIA-568-C.2 Category 6A and ISO 11801 2nd Edition Class E_A channel standards
- Contacts plated with 50 microinches of gold for superior performance
- Can be clearly identified with optional labels and icons
- Mounts to standard EIA 19" rack or 23" racks with optional extender bracket



Part Number	Part Description	No. of Rack Spaces [^]	Pkg.	Std. Ctn. Qty.
CP246X88BL	24-port, Category 6A, patch panel with 24 pre-installed RJ45 Category 6A channel compliant couplers.	1	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Each coupler module acts as one connecting hardware component in a channel.

TX6A™ 10Gig™ UTP Patch Cords available on page B.25.

Component Labels for Category 6A Patch Panel



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
CP246X88BL	C252X030FJJ	C252X030YPT	C252X030FJC	T031X000FJC-BK		

System **Overview**

Copper Systems

Fiber Optic 0 Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

Outlets

Media

Distribution

G.

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification


Cable Management Accessories

> Q. Index

ւանան TX6A™ 10Gig™ UTP Patch Cords with MaTriX Technology

- Exceed requirements of ANSI/TIA-568-C.2 Category 6A, IEEE 802.3an-2006, and ISO 11801 Class E_△ channel standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- MaTriX Technology provides superior suppression of alien crosstalk (PSANEXT and PSAACRF)
- · Superior headroom warranty provides the highest margins above the industry standard for both electrical and alien crosstalk performance
- Color-coded, keyed modular plugs mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed jack modules accommodating more discrete networks
- Each patch cord is 100% performance tested to component limits and wired to T568B
- TX6A-SD™ 10Gig™ constructed of 26 AWG stranded copper cable (nominal cable diameter 0.240 in.) and TX6A™ 10Gig Modular Plugs for superior performance
- TX6A[™] 10Gig[™] constructed of 24 AWG stranded copper cable (nominal cable diameter 0.275 in.) and TX6A 10Gig[™] Modular Plugs for superior performance

- Compatible as a component of any Panduit TX6A™ 10Gig™ UTP Copper Cabling System for increased design flexibility in channels up to 100 meters
- Plug meets all applicable ANSI/TIA-968-A requirements and exceeds IEC 60603-7 specifications
- Slender strain relief boot provides easy access in high density applications
- Plug uses an integral pair manager to optimize performance and consistency by reducing untwisting of conductors within the plug
- Plug performance in center of TIA/EIA component range, ensuring interoperability and 10GBASE-T Ethernet channel performance
- Labels on patch cords provide identification of performance level, length, and quality control number
- Patented tangle-free latch prevents snags and provides easy release, saving time on frequent moves, adds, and changes
- Optional patch cord color bands snap on and off individual patch cables offering endless color-coding options
- Optional RJ45 lock-in device blocks unauthorized removal of cable, IP phone, other networking equipment, or critical connection

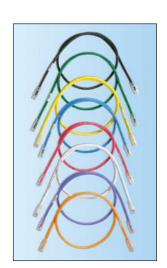

Part Number	Part Description	Length (Ft.)	Cable Color	Std. Pkg. Qty.	Ctn.
TX6A-SD™ 10Gi	g [™] UTP Patch Cord				
UTP6ASD3‡	Category 6A (SD), 26 AWG, 10 Gb/s UTP patch cord with TX6A [™] 10Gig [™] Modular Plugs on each end. Includes patent pending MaTriX Tape Technology.	3	Blue	1	10
TX6A™ 10Gig™	UTP Patch Cord				
UTP6A3^	Category 6A, 24 AWG, 10 Gb/s UTP patch cord with TX6A™ 10Gig™ Modular Plugs on each end. Includes patent pending MaTriX Tape Technology.	3	Blue	1	50
Keyed TX6A™ 10	OGig™ UTP Patch Cord				
UTPK6A3BL*	Keyed, Category 6A, 24 AWG, 10 Gb/s UTP patch cord with TX6A [™] 10Gig [™] Keyed Modular Plug on one end and TX6A [™] 10Gig [™] Non-Keyed Modular Plug on the other end. Includes patent pending MaTriX Tape Technology.	3	Black	1	10

‡For lengths 3 to 20 feet (increments of one foot) and 25, 30, 35, 40 feet, change the length designation in the part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), YL (Yellow), OR (Orange) or VL (Violet) to the part number. For example, the part number for a blue, 15-foot patch cord is UTP6ASD15BU.

^ For lengths 3 to 20 feet (increments of one foot) and 25, 30, 35, 40 feet, change the length designation in the part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), YL (Yellow), OR (Orange), VL (Violet), or GY (Gray) to the part number. For example, the part number for a blue, 15-foot patch cord is UTP6A15BU.

*For lengths other than 3 feet (5, 7, 10, 14 feet), change the length designation in the part number to the desired length. For standard cable colors other than BL (Black), replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), or OR (Orange), each color representing a different keyed configuration. Contact customer service for universal reference patch cords

Patch cord color bands available on page B.96.

RJ45 plug lock-in device available on page B.94.

Must be installed as part of a complete TX6A™ 10Gig™ Copper Cabling System in order to achieve 10GBASE-T certified performance

Reference page B.34 for appropriate labeling solution.

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

culus TX6500™ Enhanced Category 6 UTP Copper Cable

- Exceeds requirements of ANSI/TIA-568-C.2 Category 6 and ISO 11801 2nd Edition Class E channel standards
- Exceeds requirements of ANSI/TIA-568-C.2 and IEC 61156-5 Category 6 component standards
- Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Reduced attenuation maximizes the amount of signal that reaches the receiver, increasing bandwidth
- Third party tested to comply with ANSI/TIA-568-C.2
- Cable diameter: Riser 0.265 in. (6.8mm) nominal, Plenum 0.264 in. (6.7mm) nominal

- Installation temperature range: 32°F to 122°F (0°C to 50°C)
- Operating temperature range: 14°F to 140°F (-10°C to 60°C)
- Characterized to 600 MHz, 350 MHz above the standard
- Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap
- Cable supplied in an easy payout EZBrake[™] reel-in-a-box

Std.

Std.



Part Number	Part Description	Color‡	Pkg. Qty. (Ft.)	Ctn. Qty. (Ft.)
Riser				
PUR6504BU-UY	Enhanced, high-performance, Category 6, riser (CMR), 4-pair, UTP copper cable. Copper conductors are 23 AWG construction with polyolefin (PE) insulation. Conductors are twisted in pairs, separated by an integrated pair divider and protected by a flame-retardant PVC jacket.	Blue	1000	27000
Plenum				
PUP6504BU-UY	Enhanced, high-performance, Category 6, plenum (CMP), 4-pair, UTP copper cable. Copper conductors are 23 AWG construction with FEP insulation. Conductors are twisted in pairs, separated by an integrated pair divider and protected by a low smoke, flame-retardant PVC jacket.	Blue	1000	27000

‡For standard colors other than Blue, replace suffix BU (Blue) with WH (White), YL (Yellow), or IG (International Gray). Contact Customer Service for other color options. Order number of pieces required, in multiples of 9,000 feet.

Labels for TX6500™ Enhanced Category 6 UTP Copper Cable



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Cable Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
PUR6504**-UY PUP6504**-UY	S100X150YAJ	S100X150VATY	S100X150VAC	T100X000CBC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Overview

System

TX6000™ High Performance Category 6 UTP Copper Cable

- Exceeds requirements of ANSI/TIA-568-C.2 Category 6 and ISO 11801 2nd Edition Class E channel standards
- Exceeds requirements of ANSI/TIA-568-C.2 and IEC 61156-5 Category 6 component standards
- Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Third party tested to comply with ANSI/TIA-568-C.2
- Cable diameter: Riser 0.240 in. (6.1mm) nominal, Plenum 0.236 in. (5.9mm) nominal
- Installation temperature range: 32°F to 122°F (0°C to 50°C)
- Operating temperature range: 14°F to 140°F (-10°C to 60°C)
- Characterized to 550 MHz, 300 MHz above the standard
- · Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap
- Cable supplied in an easy payout EZBrake[™] reel-in-a-box



Part Number	Part Description	Color‡	Std. Pkg. Qty. (Ft.)	Ctn. Qty. (Ft.)
Riser				
PUR6004BU-UY	High performance, Category 6, riser (CMR), 4-pair, UTP copper cable. Copper conductors are 23 AWG construction with polyolefin (PE) insulation. Conductors are twisted in pairs, separated by an integrated pair divider, and protected by a flame-retardant PVC jacket.	Blue	1000	27000
Plenum				
PUP6004BU-UY	High performance, Category 6, plenum (CMP), 4-pair, UTP copper cable. Copper conductors are 23 AWG construction with FEP insulation. Conductors are twisted in pairs, separated by an integrated pair divider, and protected by a low smoke, flame-retardant PVC jacket.	Blue	1000	27000

‡For standard colors other than Blue, replace suffix BU (Blue) with WH (White), YL (Yellow), or IG (International Gray). Contact Customer Service for other color options.

Order number of pieces required, in multiples of 9,000 feet.

Labels for TX6000™ High Performance Category 6 UTP Copper Cable



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Cable Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label	
PUR6004**-UY PUP6004**-UY	S100X150YAJ	S100X150VATY	S100X150VAC	T100X000CBC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Copper Systems

C. Fiber Optic 0 Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

R. Copper Systems

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Managemen Accessories

> 0. Index

ւ(Կւ)տ 🔒 Mini-Com® TX6™ PLUS UTP Jack Modules

- Exceed ANSI/TIA-568-C.2 Category 6 and ISO 11801 2nd Edition Class E standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each jack is 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Color-coded, keyed jack modules mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed modular plugs accommodating more discrete networks
- Utilize patent-pending enhanced Giga-TX[™] Technology for jack terminations which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- · Contacts plated with 50 microinches of gold for superior performance
- No punchdown tool required; termination tool (EGJT) ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability
- · Optional termination tool (TGJT) reduces termination time by 25%, ideal for high volume installations

- Can be re-terminated a minimum of twenty times
- White termination cap designates Category 6 performance and provides positive strain relief; helps control cable bend radius and securely retains wires
- Terminate 4-pair, 22 26 AWG, 100 ohm, solid or stranded twisted pair cable
- Universal termination cap is color-coded for T568A and T568B wiring schemes
- Accept 6 and 8-position modular plugs without damage
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- · Optional dust cap keeps out dust and debris while not in use



CJ688TGIW



CJK688TGBL

Part Number	Part Description	No. of Module Spaces	Color	Std. Pkg. Qty.				
Jack Module								
CJ688TGIW‡	Category 6, RJ45, 8-position, 8-wire universal module.	1	Off White	1	50			
Keved Jack Module								

CJK688TGBL* Keyed, Category 6, RJ45, 8-position, 8-wire 1 Black 1 50 universal module.						
	CJK688TGBL*	1	Black	1	50	

‡For standard colors other than Off White, replace suffix IW (Off White) with EI (Electric Ivory), WH (White), AW (Arctic White), IG (International Gray), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow), or

*For standard colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), or OR (Orange), each color representing a different keyed configuration.

Termination tools available on page B.97 RJ45 blockout device available on page B.92.

Dust cap available on page B.97.

Contact Customer Service for bulk packaged jack modules.

To ensure optimal performance, Panduit recommends use with other Panduit TX6™ PLUS components.

Keyed Geometry









Green Key



Yellow Key



Orange



Blue

Key

Key



Black Key



Red Key



Green Key



Yellow

Key



Orange Key



Blue Key

A. System Overview

Mini-Com® TX6™ PLUS Corrosive Resistant UTP Jack Module

- Injected gel and polymer material reduce area of exposed electrical contacts providing improved long term performance in corrosive environments
- Exceed requirements of ANSI/TIA-568-C.2 Category 6, IEEE 802.3an-2006, and ISO 11801 Class E channel standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each jack is 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Utilizes patent-pending enhanced Giga-TX[™] Technology for jack termination which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- Contacts plated with 50 microinches of gold for superior performance
- No punchdown tool required; termination tool (EGJT) ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability
- Optional termination tool (TGJT) reduces termination time by 25%, ideal for high volume installations

- Can be re-terminated a minimum of twenty times
- White termination cap designates Category 6 performance and provides positive strain relief; helps control cable bend radius and securely retains wires
- Terminates 4-pair, 22 26 AWG, 100 ohm, solid or stranded twisted pair cable
- Universal termination cap is color-coded for T568A and T568B wiring schemes
- Accepts 6 and 8-position modular plugs without damage
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels, Faceplates and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use
- Optional RJ45 lock-in device blocks unauthorized removal of cable, IP phone, other networking equipment, or critical connection



Part	Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CJE	688TGIW	Category 6, RJ45, 8-position, 8-wire, universal, corrosive resistant UTP jack module	1	Off White	1	50

‡For standard colors other than Off White, replace suffix IW (Off White) with WH (White), BL (Black), RD (Red), or BU (Blue).

RJ45 blockout device available on page B.92.

Dust cap available on page B.97.

Component Labels for Mini-Com® TX6™ PLUS UTP Jack Modules



Suggested Label Solutions for TIA/EIA-606-A Compliance							
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label			
All TX6 ™ PLUS Jack Modules	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK			

For complete labeling solutions and product information, reference charts on pages 0.1 – 0.25.

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

B. Copper Systems

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. **Physical** Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

Mini-Com® Ultimate ID® TX6™ PLUS Modular Patch Panel Kits

- Supplied with black Mini-Com® TX6™ PLUS Jack Modules
- Include color-coded termination caps
- · Front access faceplates in panels

- Available with or without labels
- Can be clearly identified with the PanTher[™] LS8E or Cougar™ LS9 Hand-Held Thermal Transfer Printers



UICMPPK6G24BL

Part Number	Part Description	Labels Required	No. of Rack Spaces^	Std. Pkg. Qty.	
Mini-Com® Ultimat	e ID® Angled Modular Patch Panel Kit				
UICMPPKA6G24BL	24-port UICMPPA24BL angled patch panel with 24 CJ688TGBL jack modules.	Six 4-Port	1	1	10
Mini-Com® Ultimat	e ID® Modular Patch Panel Kit				
UICMPPK6G24BL	24-port UICMPP24BL patch panel with 24 CJ688TGBL jack modules.	Six 4-Port	1	1	10

[^]One rack space = 1.75" (44.45mm).

Includes #12-24 and metric M6 screws to mount the patch panel to the rack. Ultimate ID **Labels can be found on pages O.11 - O.19.

(I) Mini-Com® TX6™ PLUS Modular Patch Panel Kits

- Supplied with black Mini-Com® TX6™ PLUS Jack Modules Available with or without labels
- Include color-coded termination caps
- · Front access faceplates in panels

- Include EGJT termination tool



Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	
Mini-Com® Angled	Modular Patch Panel Kits – with Labels	- CP-1000	J-	
CPPKA6G24WBL	24-port angled patch panel with 24 CJ688TGBL jack modules.	1	1	10
CPPKLA6G24WBL	24-port CPPLA24WBL angled patch panel with 24 CJ688TGBL jack modules.	1	1	10
Mini-Com® Modula	ar Patch Panel Kits – with Labels			
CPPK6G24WBL	24-port CPP24WBL patch panel with 24 CJ688TGBL jack modules.	1	1	10
CPPKL6G24WBL	24-port CPPL24WBL patch panel with 24 CJ688TGBL jack modules.	1	1	10

^One rack space = 1.75" (44.45mm).

Includes #12-24 and metric M6 screws to mount the patch panel to the rack.

System **Overview**

DP6™ PLUS UTP Patch Panels

- Exceed ANSI/TIA-568-C.2 Category 6 and ISO 11801 2nd Edition Class E standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each port is 100% tested to ensure NEXT and RL performance and is individually serialized to support traceability
- Utilize 110 punchdown termination on back panel and includes retention cap for each port
- Each port contains a universal label that is color-coded for T568A and T568B wiring schemes
- Angled versions allow for higher density applications by easily routing the patch cords to each side of the panel eliminating the need for horizontal cable management
- Terminate 4-pair, 22 26 AWG, 100 ohm, solid or stranded twisted pair cable
- Mount to standard EIA 19" rack or 23" racks with optional extender bracket
- Write-on areas for port and panel identification
- Can be clearly identified with labels and icons
- Optional label kits (DPLK24 and DPLK48) contain adhesive label holder and labels for easy port and panel identification

The same of the sa	Part Number	Part Description
DPA24688TGY	DP6™ PLUS An	gled Patch Panels
The second second second second	DPA24688TGY	24-port, angled, Category 6, patch panel with 24 RJ45, 8-position, 8-wire ports.
DPA48688TGY	DPA48688TGY	48-port, angled, Category 6, patch panel with 48 RJ45, 8-position, 8-wire ports.
50.700 50.700	DP6™ PLUS Fla	at Patch Panels
	DP12688TGY	12-port, Category 6, patch panel with twelve RJ45, 8-position, 8-wire ports. Mounts to 89D wall mount bracket.
	DP24688TGY	24-port, Category 6, patch panel with 24 RJ45, 8-position, 8-wire ports.
1	DP48688TGY	48-port, Category 6, patch panel with 48 RJ45, 8-position, 8-wire ports.
	^One rack space = 1	75" (44 45mm)


One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Replaceable punchdown modules available, part number DRJ688TGBL.

Termination tool (PDT110) available on page B.91.

89D wall mount bracket available on page B.72.

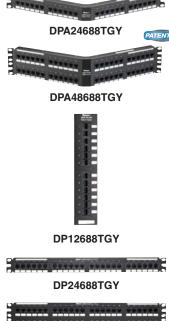

Component Labels for DP6™ PLUS UTP Patch Panels



DP48688TGY

Suggested Label Solutions for TIA/EIA-606-A Compliance				
Patch Panel Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label
All Patch Panels on this Page	C379X030FJJ	C379X030YPT	C379X030FJC	T031X000FJC-BK

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Copper Systems

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

Std. Std.

Ctn.

10

10

10

10

10

Pkg.

Qty. Qty.

1

1

1

No. of

Rack

Spaces^

2

1

2

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Mini-Com® Category 6 UTP Coupler Module

- Designed to exceed performance requirements of the ANSI/TIA-568-C.2 Category 6 and ISO 11801 2nd Edition Class E channel standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- RJ45 8-position, 8-wire female to RJ45 8-position, 8-wire female pass-through module provides fast and easy plug and play connection of 6 and 8-position RJ45 patch cords
- No tools required
- 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Contacts plated with 50 microinches of gold for superior performance

- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels and Faceplates; not suitable for surface mount box applications
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use



Part Number	Part Description	No. of Module Spaces	Color‡	Pkg.	Std. Ctn. Qty.
CC688IW	Category 6, RJ45, 8-position, 8-wire universal coupler module.	1	Off White	1	50

‡For other colors replace suffix IW (Off White) with BL (Black). Acts as one connecting hardware component in channel. RJ45 blockout device available on page B.92. Dust cap available on page B.97.

TX6™ PLUS UTP Patch Cords available on page B.34.

Component Labels for Mini-Com® Category 6 UTP Coupler Module



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label	
CC688IW	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

THISICAL INTRASTRUCTURES I

 Coupler panel ports provide fast and easy plug and play connection of 6 and 8-position RJ45 patch cords

Category 6 Coupler Patch Panel

- No tools required
- Designed to exceed performance requirements of the ANSI/TIA-568-C.2 Category 6 and ISO 11801 2nd Edition Class E channel standards
- Contacts plated with 50 microinches of gold for superior performance
- Can be clearly identified with optional labels and icons
- Mounts to standard EIA 19" rack or 23" racks with optional extender bracket



Part Number	Part Description	No. of Rack Spaces^	Pkg.	
CP24688BL	24-port, Category 6, patch panel with 24 pre-installed RJ45 Category 6 channel compliant couplers.	1	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Each coupler module acts as one connecting hardware component in a channel.

TX6™ PLUS UTP Patch Cords available on page B.34.

Component Labels for Category 6 Coupler Patch Panel



Suggested Label Solutions for TIA/EIA-606-A Compliance				
Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label
CP24688BL	C252X030FJJ	C252X030YPT	C252X030FJC	T031X000FJC-BK

For complete labeling solutions and product information, reference charts on pages 0.1-0.25.

B. Copper Systems

System Overview

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

R. Copper Systems

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

M. **Grounding &** Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories


Index



TX6™ PLUS UTP Patch Cords

- Exceed ANSI/TIA-568-C.2 Category 6 and ISO 11801 Class E standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each patch cord is 100% performance tested to component limits and wired T568B
- Color-coded, keyed modular plugs mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed jack modules accommodating more discrete networks
- Constructed of Category 6, 24 AWG UTP stranded cable and TX6™ PLUS Modular Plugs; plug contacts plated with 50 microinches of gold for superior performance
- Plug meets all applicable ANSI/TIA/EIA-968-A requirements and exceeds IEC 60603-7 specifications
- · Slender strain relief boot provides easy access in high density applications

- Plug uses an integral pair manager to optimize performance and consistency by reducing untwisting of conductors within the plug
- Perform in center of TIA/EIA component range, ensuring interoperability and excellent performance
- · Labels on patch cords provide identification of performance level, length, and quality control number
- Patented tangle-free latch prevents snags and provides easy release, saving time on frequent moves, adds, and changes
- Optional patch cord color bands snap on and off individual patch cables offering endless color-coding options
- Optional RJ45 plug lock-in device blocks unauthorized removal of cable, IP phone, other networking equipment, or critical connection
- Third party tested for Category 6 component compliance



Part Number	Part Description	Length (Ft.)	Cable Color	Std. Pkg. Qty.	Ctn.
Patch Cord					
UTPSP3Y‡	Category 6, UTP patch cord with TX6™ PLUS Modular Plugs on each end.	3	Off White	1	10
Keyed Patch	Cord				
UTPKSP3BL*	Keyed, Category 6, UTP patch cord with TX6™ PLUS Keyed Modular Plug on one end and TX6™ PLUS Non-Keyed Modular Plug on the other end.	3	Black	1	10

‡For lengths 1 to 20 feet (increments of one foot) and 25, 30, 35, 40 feet change the length designation in the part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) before Y at the end of the part number. For example, the part number for a blue 15-foot patch cord is UTPSP15BUY.

*For lengths other than 3 feet (5, 7, 10, 14 feet) change the length designation in the part number to the desired length. For standard cable colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), or OR (Orange), each color representing a different keyed configuration.

Contact customer service for universal reference patch cords.

Patch cord color bands available on page B.96.

RJ45 plug lock-in device available on page B.94.

To ensure optimal performance, Panduit recommends use with other Panduit TX6™ PLUS components.

Labels for TX6™ PLUS UTP Patch Cords



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Cord Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label	
All Patch Cords	S100X150YAJ	S100X150VATY	S100X150VAC	T100X000CBC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.



C UNITED TX6™ PLUS UTP Modular Plug

- Meets all applicable ANSI/TIA-968-A requirements and exceeds IEC 60603-7 specifications
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Used in UTPSP series patch cords providing Category 6 performance
- Patented tangle-free latch prevents snags and provides easy release saving time on frequent moves, adds, and changes
- Integral pair manager optimizes performance and consistency by reducing untwist at plug
- · Contacts plated with 50 microinches of gold for superior performance
- Terminates 24 AWG, 100 ohm, stranded or solid conductor with max. conductor insulation diameter of 0.041 in.



Part Number	Part Description	Std. Pkg. Qty.	
SP688-C	8-position, 8-wire modular plug.	100	1000

To ensure optimal performance, Panduit recommends use with other Panduit TX6™ PLUS components. MPT5-8AS crimp tool required for termination, available on page B.98.

System Overview

Copper Systems

C. Fiber Optic 0 Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. **Physical** Infrastructure Managemen

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

M. **Grounding & Bonding**

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

c(VL)us (Mini-Com® TX6™ PLUS Shielded Jack Modules

- Exceed requirements of ANSI/TIA-568-C.2 Category 6, IEEE 802.3an-2006, and ISO 11801 Class E channel standards
- Meet requirements of IEEE 802.af and IEEE 802.3at for PoE applications
- Each jack is 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Color-coded, keyed jack modules mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed modular plugs accommodating more discrete networks
- Utilize patent-pending enhanced Giga-TX[™] Technology for jack terminations which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- Fully grounded and bonded to patch panel when installed in Panduit All Metal Modular Patch Panel
- · Contacts plated with 50 microinches of gold for superior performance
- No punchdown tool required; termination tool (EGJT) ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability
- Optional termination tool (TGJT) reduces termination time by 25%, ideal for high volume installations

- Can be re-terminated a minimum of twenty times
- Off white termination cap designates Category 6 performance and provides positive strain relief; helps control cable bend radius and securely retains wires
- Terminate 4-pair, 22 26 AWG, 100 ohm, solid or stranded shielded twisted pair cable
- Universal termination cap is color-coded for T568A and T568B wiring schemes
- Integrated strain relief with wire cap provides 360° conductive path for grounding
- 0.187 in. tab provides conductive path for grounding individual jacks
- Accept 6 and 8-position modular plugs without damage
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- · Optional dust cap keeps out dust and debris while not in use



CJS688TGY



CJSK688TGBL

Part Number	Part Description	No. of Module Spaces	Color	Std. Pkg. Qty.	Ctn.
Jack Module					
CJS688TGY	Category 6, RJ45, 8-position, 8-wire universal shielded black module with integral shield.	1	Black	1	50
Keyed Jack Module					
CJSK688TGBL*	Keyed, Category 6, RJ45, 8-position, 8-wire universal shielded black module with integral shield.	1	Black	1	50

*For standard colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), VL (Violet), or GY (Gray), each color representing a different keyed configuration.

Termination tools available on page B.97.

Shield grounding requires proper installation of shielded jack module and the use of shielded patch cords and cable. All metal modular patch panels available on page B.72.

For grounding shielded modules not installed in a shielded patch panel, see the shielded jack module grounding kit, CJSGK-XY on page M.23.

RJ45 blockout device available on page B.92.

Dust cap available on page B.97.

To ensure optimal performance, Panduit recommends use with other Panduit TX6™ PLUS components. Contact customer service for bulk packaged jack modules.

System Overview

B. Copper Systems

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Distribution

Management

Routing

Surface Raceway

Cabinets, Racks & Cable

Q. Index



CULus (Mini-Com® TX6™ PLUS Shielded Jack Modules (continued)

Keyed Geometry



Black

Key





Green

Key



Yellow

Key



Key



Blue


Key





Intl. Gray









Red

Key

Key



Green

Key



Yellow

Key



Key



Key





Violet Key

Intl. Gray Key

Black Key

1A-B01

Media

I. Physical Infrastructure

> J. Overhead & Underfloor

Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

Suggested Label Solutions for TIA/EIA-606-A Compliance						
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
All TX6™PLUS Jack Modules	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK		

Component Labels for Mini-Com® TX6™ PLUS Shielded Jack Modules

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industria

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

TX6™ PLUS Shielded Modular Plug

- Meets all applicable ANSI/TIA-968-A requirements and exceeds IEC 60603-7 specifications
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Used in STP6X series patch cords providing Category 6 performance
- Patented tangle-free latch prevents snags and provides easy release saving time on frequent moves, adds, and changes
- Slender strain relief boot provides easy access in high density applications

- Integral pair manager optimizes performance and consistency by reducing untwist at plug
- Contacts plated with 50 microinches of gold for superior performance
- Shielded plug housing provides conductive path for grounding
- Terminates 24 26 AWG, 100 ohm, stranded or solid shielded cable with max. conductor insulation diameter of 0.040 in.



Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
SPS688-C	8-position, 8-wire shielded modular plug.	100	1000

To ensure optimal performance, Panduit recommends use with other Panduit TX6™ PLUS components. MPT5-8AS crimp tool required for termination. Termination tool available on page B.98.

Land TX5500 Tenhanced Category 5e UTP Copper Cable

- Exceeds requirements of ANSI/TIA-568-C.2 Category 5e and ISO 11801 2nd Edition Class D channel standards
- Exceeds requirements of ANSI/TIA-568-C.2 and IEC 61156-5 Category 5e component standards
- Third party tested to Category 5e channel compliance
- Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Cable diameter: Riser 0.225 in. (5.7mm) nominal, Plenum 0.193 in. (4.9mm) nominal
- Installation temperature range: 32°F to 122°F (0°C to 50°C)
- Operating temperature range: 14°F to 140°F (-10°C to 60°C)
- Channel characterized to 450 MHz, 350 MHz above the standard
- · Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap
- Cable supplied in an easy payout box



PUR5504WH-UY

Part Number	Part Description	Color‡	Std. Pkg. Qty. (Ft.)	Std. Ctn. Qty. (Ft.)
Riser				
PUR5504BU-UY	Enhanced Category 5e, riser (CMR), 4-pair, UTP copper cable. Copper conductors are 24 AWG construction with polyolefin (PE) insulation. Conductors are twisted in pairs and protected by a flame-retardant PVC jacket.	Blue	1000	39000
Plenum				
PUP5504BU-UY	Enhanced Category 5e, plenum (CMP), 4-pair, UTP copper cable. Copper conductors are 24 AWG construction with FEP insulation. Conductors are twisted in pairs and placed in a low smoke, flame-retardant PVC jacket.	Blue	1000	39000

‡For standard colors other than Blue, replace BU (Blue) with WH (White), YL (Yellow), or IG (International Gray). Contact Customer Service for other color options

Order number of pieces required, in multiples of 13,000 feet.

Labels for TX5500™ Enhanced Category 5e UTP Copper Cable



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Cable Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label	
PUR5504**-UY PUP5504**-UY	S100X150YAJ	S100X150VATY	\$100X150VAC	T100X000CBC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Copper Systems

C. Fiber Optic 0 Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

l. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Mini-Com® TX5e™ UTP Jack Modules

- Exceed ANSI/TIA-568-C.2 Category 5e and ISO 11801 2nd Edition Class D standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each jack is 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Color-coded, keyed jack modules mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed modular plugs accommodating more discrete networks
- Utilize patent-pending enhanced Giga-TX[™] Technology for jack terminations which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- Contacts plated with 50 microinches of gold for superior performance
- No punchdown tool required; termination tool (EGJT) ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability
- Optional termination tool (TGJT) reduces termination time by 25%, ideal for high volume installations

- Can be re-terminated a minimum of twenty times
- Red termination cap designates Category 5e performance and provides positive strain relief; helps control cable bend radius and securely retains wires
- Terminate 4-pair, 22 26 AWG, 100 ohm, solid or stranded twisted pair cable
- Universal termination cap is color-coded for T568A and T568B wiring schemes
- Accept 6 and 8-position modular plugs without damage
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use



CJ5E88TGIW



CJK5E88TGBL

Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Std. Ctn. Qty.
Jack Module					
CJ5E88TGIW‡	Category 5e, RJ45, 8-position, 8-wire universal jack module.	1	Off White	1	50
Keyed Jack Mod	dule				
CJK5E88TGBL*	Keyed, Category 5e, RJ45, 8-position, 8-wire universal module.	1	Black	1	50

‡For standard colors other than Off White, replace suffix IW (Off White) with EI (Electric Ivory), WH (White), AW (Arctic White), IG (International Gray), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow) or VL (Violet).

*For standard colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green) or OR (Orange), each color representing a different keyed configuration. Termination tools available on page B.97.

RJ45 blockout device available on page B.92.

Dust cap available on page B.97.

Contact customer service for bulk packaged jack modules.

System Overview

Copper Systems

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Infrastructure Management J.

I. Physical

Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

Q. Index

Mini-Com® TX5e™ UTP Jack Modules (continued)

Keyed Geometry



Black

Key



Red

Key



Green

Key



Yellow

Key





Orange Blue Key Key













Yellow

Key

Black

Red Key

Green Key

Key

Orange Key

Blue Key

Component Labels for Mini-Com® TX5e™ UTP Jack Modules



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
All TX5e [™] Jack Modules	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distributior

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Mini-Com® TX5e™ Corrosive Resistant UTP Jack Module

- Injected gel and polymer material reduce area of exposed electrical contacts providing improved long term performance in corrosive environments
- Exceed requirements of ANSI/TIA-568-C.2 Category 5e, IEEE 802.3an-2006, and ISO 11801 Class D channel standards
- Exceed requirements of ANSI/TIA-568-C.2 Category 5e and IEC 61156-5 Category 5e component standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each jack is 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Utilizes patent-pending enhanced Giga-TX[™] Technology for jack terminations which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- Contacts plated with 50 microinches of gold for superior performance
- No punchdown tool required; termination tool (EGJT) ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability

- Optional termination tool (TGJT) reduces termination time by 25%, ideal for high volume installations
- · Can be re-terminated a minimum of twenty times
- Red termination cap designates Category 5e performance and provides positive strain relief; helps control cable bend radius and securely retains wires
- Terminates 4-pair, 22 26 AWG, 100 ohm, solid or stranded twisted pair cable
- Universal termination cap is color-coded for T568A and T568B wiring schemes
- Accepts 6 and 8-position modular plugs without damage
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use



Part Number	Part Description	No. of Module Spaces	Color‡	_	Std. Ctn. Qty.
CJE5E88TGIW	Corrosive resistant, Category 5e, RJ45, 8-position, 8-wire universal module.	1	Off White	1	50

‡For standard colors other than Off White, replace suffix IW (Off White) with WH (White), BL (Black), RD (Red), or BU (Blue).

Termination tools available on page B.97.

RJ45 blockout device available on page B.92.

Dust cap available on page B.97.

Component Labels for Mini-Com® TX5e™ Corrosive Resistant UTP Jack Module



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
CJE5E88TG**	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

DP5e[™] UTP Patch Panels

- Exceed ANSI/TIA-568-C.2 Category 5e and ISO 11801 Class D standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each port is 100% tested to ensure NEXT and RL performance and is individually serialized to support traceability
- Utilize 110 termination on back panel and includes retention cap for each port
- Each port contains a universal label that is color-coded for T568A and T568B wiring schemes
- · Contacts plated with 50 microinches of gold for superior performance

- Angled versions allow for higher density installations by easily routing the patch cords to each side of the panel eliminating the need for horizontal cable management
- Terminate 4 pair, 22 26 AWG, 100 ohm, solid or stranded twisted pair cable
- Mount to standard EIA 19" rack or 23" racks with optional extender bracket

No. of

Rack

Spaces^

Std. Std.

Pkg. Ctn.

Qty. Qty.

- Write-on areas for port and panel identification
- · Can be clearly identified with labels and icons
- Optional label kits (DPLK24 and DPLK48) contain adhesive label holder and labels for easy port and panel identification



Trees to see and the	
DPA245E88TGY	PATENTE

Part Number

DP5e [™] Angled Pa	tch Panels			
DPA245E88TGY	24-port, Category 5e, patch panel with 24 RJ45, 8-position, 8-wire ports.	1	1	10
DPA485E88TGY	48-port, Category 5e, patch panel with 48 RJ45, 8-position, 8-wire ports.	2	1	10

Part Description



DPA485E88TGY



DP125E88TGY

DPA485E88TGY	48-port, Category 5e, patch panel with 48 HJ45, 8-position, 8-wire ports.	2	1	10
DP5e™ Flat Patch	Panels			
DP125E88TGY	12-port, Category 5e, patch panel with twelve RJ45, 8-position, 8-wire ports. Mounts to 89D wall mount bracket.		1	10
DP245E88TGY	24-port, Category 5e, patch panel with 24 RJ45, 8-position, 8-wire ports.	1	1	10
DP485E88TGY	48-port, Category 5e, patch panel with 48 RJ45, 8-position, 8-wire ports.	2	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Replaceable punchdown modules available, part number DRJ5E88TGBL.

Termination tool (PDT110) available on page B.91.

89D wall mount bracket available on page B.72.



DP245E88TGY



DP485E88TGY

Component Labels for DP5e™ UTP Patch Panels



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Patch Panel Laser/Ink Jet Desktop Printer Label TDP43ME Thermal Transfer PanTher LS8E Cougar LS8E Hand-Held Printer Label Hand-Held Printer Label						
All Patch Panels on this page	C379X030FJJ	C379X030YPT	C379X030FJC	T031X000FJC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Copper Systems

C. Fiber Optic 0 Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Mini-Com® Category 5e UTP Coupler Module

- Designed to exceed performance requirements of the ANSI/TIA-568-C.2 Category 5e and ISO 11801 2nd Edition Class D channel standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- RJ45 8-position, 8-wire female to RJ45 8-position, 8-wire female pass-through module provides fast and easy plug and play connection of 6 and 8-position RJ45 patch cords
- No tools required
- 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Contacts plated with 50 microinches of gold for superior performance

- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels and Faceplates; not suitable for surface mount box applications
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	
CC5E88IW	Category 5e, RJ45, 8-position, 8-wire universal coupler module.	1	Off White	1	50

‡For other colors replace suffix IW (Off White) with BL (Black). Acts as one connecting hardware component in channel. RJ45 blockout device available on page B.92. Dust cap available on page B.97. TX5e™ UTP Patch Cords available on page B.46.

Component Labels for Mini-Com® Category 5e UTP Coupler Module



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Laser/Ink Jet Desktop Printer Label TDP43ME Thermal Transfer PanTher™ LS8E Cougar™ LS9 Part Number Printer Label Desktop Printer Label Hand-Held Printer Label					
CC5E88IW	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

System **Overview**

Category 5e Coupler Patch Panel

- Coupler panel ports provide fast and easy plug and play connection of 6 and 8-position RJ45 patch cords
- No tools required
- Designed to exceed ANSI/TIA-568-C.2 Category 5e and all ISO 11801 2nd Edition Class D channel standard requirements at swept frequencies up to 100 MHz
- · Contacts plated with 50 microinches of gold for superior performance
- · Can be clearly identified with optional labels and icons
- Mounts to standard EIA 19" rack or 23" racks with optional extender bracket

Secre	***	****	2000	2222	>> > 5 G

Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	
CP245E88BLY	24-port, Category 5e, patch panel with 24 pre-installed RJ45 Category 5e channel compliant couplers.	1	1	10


^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Each coupler module acts as one connecting hardware component in a channel.

TX5e ™UTP Patch Cords available on page B.46.

Component Labels for Category 5e Coupler Patch Panel



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label		
CP245E88BLY	C252X030FJJ	C252X030YPT	C252X030FJC	T031X000FJC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

R. Copper **Systems**

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

Industrial

0. Labeling & Identification


Cable Management Accessories

> 0. Index

ւ(Ա)սs (🔒 TX5e™ UTP Patch Cords

- Exceed ANSI/TIA-568-C.2 Category 5e and ISO 11801 Class D standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Color-coded, keyed modular plugs mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed jack modules accommodating more discrete networks
- Each patch cord is 100% performance tested to component limits and wired to T568A
- Constructed of Category 5e, 24 AWG UTP stranded cable and Pan-Plug® Modular Plugs; plug contacts plated with 50 microinches of gold for superior performance

- Plug meets all applicable ANSI/TIA/EIA-968-A requirements and exceeds IEC 60603-7 specifications
- Patented tangle-free latch prevents snags and provides easy release, saving time on frequent moves, adds, and changes
- · Labels on patch cords provide identification of performance level, length, and quality control number
- · Optional patch cord color bands snap on and off individual patch cables offering endless color-coding options
- Optional RJ45 plug lock-in device blocks unauthorized removal of cable, IP phone, other networking equipment, or critical connection
- Third party tested to Category 5e component compliance

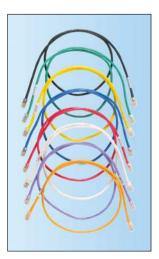

Part Number	Part Description	Length (Ft.)	Cable Color	Std. Pkg. Qty.	Ctn.
Patch Cords					
UTPCH3Y‡	Category 5e, UTP patch cord with Pan-Plug ™ Modular Plugs on each end.	3	Off White	1	10
Keyed Patch (Cords				
UTPKCH3BL*	Keyed, Category 5e, UTP patch cord with Pan-Plug™ Keyed Modular Plug on one end and Pan-Plug™ Non-Keyed Modular Plug on the other end.	3	Black	1	10

‡For lengths 1 to 20 feet (increments of one foot) and 25, 30, 35, 40 feet change the length designation in the part number to the desired length. For standard cable colors other than Off White, add suffix BL (Black), BU (Blue), GR (Green), RD (Red), YL (Yellow), OR (Orange), or VL (Violet) before the Y in the part number. For example, the part number for a blue 15-foot patch cord is UTPCH15BUY.

*For lengths other than 3 feet (5, 7, 10, 14 feet) change the length designation in the part number to the desired length. For standard cable colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), or OR (Orange), each color representing a different keyed configuration.

Contact customer service for universal reference patch cords.

Patch cord color bands available on page B.91.

RJ45 plug lock-in device available on page B.94.

Labels for TX5e™ UTP Patch Cords



	Suggested Label Solutions for TIA/EIA-606-A Compliance					
· ·				Cougar [™] LS9 Hand-Held Printer Label		
All Patch Cords	S100X150YAJ	S100X150VATY	S100X150VAC	T100X000CBC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Pan-Plug® Category 5e UTP Modular Plugs

- Meet all applicable ANSI/TIA-968-A requirements and exceeds IEC 60603-7 specifications
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Used in UTPCH series patch cords providing Category 5e performance
- Patented tangle-free plug latch prevents snags and provides easy release saving time on frequent moves, adds, and changes
- Simplified termination requires no loading bar; guide ramp facilitates easy conductor insertion and termination
- · Contacts plated with 50 microinches of gold for superior performance
- Terminate 24 AWG, 100 ohm, stranded or solid conductor with max. conductor insulation diameter of 0.040"



Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
MP588-L	8-position, 8-wire modular plug.	50	250
MP588-C	8-position, 8-wire modular plug.	100	1000
MP588-M	8-position, 8-wire modular plug.	1000	5000

MPT5-8AS crimp tool required for termination, available on page B.98.

Category 5e F/UTP Shielded Copper Cable

- Exceeds requirements of ANSI/TIA-568-C.2 Category 5e and ISO 11801 2nd Edition Class D channel standards
- Exceeds requirements of ANSI/TIA-568-C.2 Category 5e and IEC 61156-5 Category 5e component standards
- Meets requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Cable diameter: Riser 0.241 inch (6.1 mm), Plenum 0.229 inch (5.8mm)
- Installation temperature range: 32°F to 122°F (0°C to 50°C)
- Operating temperature range: -4°F to 140°F (-20°C to 60°C)
- · Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap
- · Cable supplied on a reel



Part Number	Part Description	Cable Color	Pkg. Qty.	Ctn. Qty.
Riser				
PFR5504BU-UY	Category 5e, riser (CMR), 4-pair, F/UTP copper cable. Copper conductors are 24 AWG construction with polyethylene insulation. Conductors are twisted in pairs, surrounded by an overall polyester aluminum foil with a stranded copper drain wire and protected by a flame-retardant PVC jacket.	Blue	1000	20000
Riser				
PFP5504BU-UY	Category 5e, plenum (CMP), 4-pair, F/UTP copper cable. Copper conductors are 24 AWG construction with FEP insulation. Conductors are twisted in pairs, surrounded by an overall polyester aluminum foil with stranded copper drain wire and protected by a low smoke flame-retardant PVC jacket.	Blue	1000	20000
For other colors, ren	place BU (Blue) with WH (White), IG (International Gray), BL (Blac	k) GR (G	reen) O	R

(Orange), RD (Red), VL (Violet), or YL (Yellow).

Order number of pieces required, in multiples of 5,000 feet.

-В.	
Copp	e
Syste	m

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Crd Crd

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper **Systems**

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemer

J. Overhead 8 Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

ւ(Սլ)ս։ 🙀 Mini-Com® TX5e™ Shielded Jack Modules

- Exceed requirements of ANSI/TIA-568-C.2 Category 5e, IEEE 802.3an-2006, and ISO 11801 Class D channel standards
- Exceed requirements of ANSI/TIA-568-C.2 Category 5e and IEC 61156-5 Category 5e component standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Each jack is 100% tested to ensure NEXT and RL performance and is individually serialized for traceability
- Utilize patent-pending enhanced Giga-TX[™] Technology for jack terminations which optimizes performance by maintaining cable pair geometry and eliminating conductor untwist
- Fully grounded and bonded to patch panel when installed in Panduit All Metal Modular Patch Panel
- Contacts plated with 50 microinches of gold for superior performance
- No punchdown tool required; termination tool (EGJT) ensures conductors are fully terminated by utilizing a smooth forward motion without impact on critical internal components for maximum reliability
- Optional termination tool (TGJT) reduces termination time by 25%, ideal for high volume installations
- · Can be re-terminated a minimum of twenty times

- Red termination cap designates Category 5e performance and provides positive strain relief; helps control cable bend radius and securely retains wires
- Terminate 4-pair, 22 26 AWG, 100 ohm, solid or stranded shielded twisted pair cable
- Universal termination cap is color-coded for T568A and T568B wiring schemes
- Integrated strain relief with wire cap provides 360° conductive path for grounding
- 0.187 in, tab provides conductive path for grounding individual jacks
- Accept 6 and 8-position modular plugs without damage
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- Optional dust cap keeps out dust and debris while not in use



CJS5E88TGY



CJSK5E88TGBL

Part Number	Part Description	No. of Module Spaces	Cable Color				
Jack Module							
CJS5E88TGY	Category 5e, RJ45, 8-position, 8-wire universal shielded black module with integrated shield.	1	Black	1	50		
Keyed Jack Module							
CJSK5E88TGBL*	Keyed, Category 5e, RJ45, 8-position, 8-wire universal shielded black module with integrated shield.	1	Black	1	50		

*For standard colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), VL (Violet), or GY (Gray), each color representing a different keyed configuration.

Termination tools available on page B.97.

Shield grounding requires proper installation of shielded jack module and the use of shielded patch cords and cable.

All metal modular patch panels available on page B.73.

For grounding shielded modules not installed in a shielded patch panel, see the shielded jack module grounding kit, CJSGK-XY on page M.23.

RJ45 blockout device available on page B.92.

Dust cap available on page B.97.

Contact customer service for bulk packaged lack modules.

System Overview

B. Copper Systems

C. Fiber **Optic** Systems





Continued) In the continued of the cont

Keyed Geometry



Black

Key





Green

Key



Yellow

Key



Orange

Key



Blue

Key



Violet

Key







Black

Key



Key

Red

Key



Green

Key



Yellow

Key



Key







Key

Blue Key

Violet Key

Intl. Gray Key

Component Labels for Mini-Com® TX5e™ Shielded Jack Modules



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label	
All TX5e™ Shielded Jack Modules	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

B. Copper **Systems**

tule of the cords of the cords

C. Fiber **Optic** Systems

Power over

- - PoE applications
- **Ethernet**
- E. Zone Cabling
- F. Wireless
- G. Outlets
- Media Distribution
- Ι. Physical Infrastructure Managemen
- J. Overhead & Underfloor Routing
- Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & **Bonding**

Industrial


0. Labeling & Identification

Cable Management Accessories

0. Index

- Exceed ANSI/TIA-568-C.2 Category 5e and ISO 11801 Class D standards
- Meet requirements of IEEE 802.3af and IEEE 802.3at for
- · Color-coded, keyed modular plugs mechanically and visually distinguish connections to prevent unintentional mating with unlike keyed or non-keyed jack modules accommodating more discrete networks
- Each patch cord is 100% performance tested to component limits and wired T568A
- Constructed of Category 5e, 26 AWG, STP stranded, LSZH/CM cable and Pan-Plug™ Shielded Modular Plugs; plug contacts plated with 50 microinches of gold for superior performance

- Plug meets all applicable ANSI/TIA/EIA-968-A requirements and exceeds IEC 60603-7 specifications
- Patented tangle-free latch prevents snags and provides easy release, saving time on frequent moves, adds, and changes
- · Labels on patch cords provide identification of performance level, length, and quality control number
- Optional patch cord color bands snap on and off individual patch cables offering endless color-coding options
- Optional RJ45 plug lock-in device blocks unauthorized removal of cable, IP phone, other networking equipment, or critical connection



Part Number	Part Description	Length (m)	Boot Color	Cable Color	Std. Pkg. Qty.	Std. Ctn. Qty.
Patch Cords						
STPCH1MBBL‡	Category 5e, shielded patch cord with Pan-Plug® Shielded Modular Plugs on each end.	1	Black	International Gray	1	10

Part Number Keyed Patch Co	Part Description	Length (Ft.)	Boot Color	Cable Color	Std. Pkg. Qty.	Std. Ctn. Qty.
STPKCH3BL	Keyed, Category 5e, shielded patch cord with Pan-Plug® Keyed Shielded Modular Plug on one end and Pan-Plug® Non-Keyed Shielded Modular Plug on the other end.	3	Black	International Gray	1	10

‡For lengths 1 to 10 meters (increments of one meter) and 0.5, 1.5, 2.5, 15, 20, 25, 30, 35, 40 meters change the length designation in the part number to the desired length. For boot colors other than Black, replace suffix BL (Black) with BU (Blue), GR (Green), RD (Red), or YL (Yellow). For example, the part number for a 15 meter patch cord with blue boots is STPCH15MBBU.

*For lengths other than 3 feet (5, 7, 10, 14 feet) change the length designation in the part number to the desired length. For boot colors other than Black, replace suffix BL (Black) with BU (Blue), RD (Red), YL (Yellow), GR (Green), or OR (Orange), each color representing a different keyed configuration. Contact customer service for universal reference patch cords.

Patch cord color bands available on page B.96.

RJ45 plug lock-in device available on page B.94.

Labels for TX5e™ Shielded Patch Cords



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Cord Laser/Ink Jet Desktop Printer Label Desktop Printer La					
All Patch Cords	S100X150YAJ	S100X150VATY	S100X150VAC	T100X000CBC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

Pan-Plug® Category 5e Shielded Modular Plug

- Meets all applicable ANSI/TIA-968-A requirements and exceeds IEC 60603-7 specifications
- Meet requirements of IEEE 802.3af and IEEE 802.3at for PoE applications
- Used in STPCH series patch cords providing Category 5e performance
- Patented tangle-free latch prevents snags and provides easy release saving time on frequent moves, adds, and changes
- Simplified termination requires no loading bar, guide ramp facilitates easy conductor insertion and termination
- Contacts plated with 50 microinches of gold for superior performance
- Shielded plug housing provides conductive path for grounding
- Terminates 24 26 AWG 100 ohm stranded or solid shielded cable with max. conductor insulation diameter of 0.040 in.



Part Number	Part Description		Ctn.
MPS588-C	8-position, 8-wire shielded modular plug.	100	1000

To ensure optimal performance, Panduit recommends use with other Panduit Category 5e components. MPT5-8AS crimp tool required for termination, available on page B.98.

B.	
Copp	e
Syste	m

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industria

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

TX5500™ Category 5e 25-Pair UTP Copper Cable

- Exceeds requirements of ANSI/TIA-568-C.2 Category 5e and ISO 11801 2nd Edition Class D channel standards
- Exceeds requirements of ANSI/TIA-568-C.2 and IEC 61156-5 Category 5e component standards
- Meets requirements of IEEE 802.3af and 802.3at for PoE applications
- Cable diameter: Riser 0.511 in. (12.9mm) nominal, Plenum 0.455 in. (11.6mm) nominal
- Installation temperature range: 32°F to 122°F (0°C to 50°C)
- Operating temperature range: -4°F to 167°F (-20°C to 75°C)
- Descending length cable markings enable easy identification of remaining cable which reduces installation time and cable scrap
- Cable supplied on a reel



PUR5525IG-UY

Part Number	Part Description	Color‡	Std. Pkg. Qty. (Ft.)	Std. Ctn. Qty. (Ft.)
Riser				
PUR5525IG-UY	Category 5e riser (CMR) 25-pair UTP copper cable. Copper conductors are 24 AWG construction with HDPE insulation. Conductors are twisted in pairs and placed in a flame-retardant PVC jacket.	International Gray	1000	3000
Plenum				
PUP5525IG-UY	Category 5e plenum (CMP) 25-pair UTP copper cable. Copper conductors are 24 AWG construction with FEP insulation. Conductors are twisted in pairs and placed in a low smoke, flame-retardant, fluoropolymer jacket.	International Gray	1000	3000

‡For standard colors other than IG (International Gray), replace IG with BU (Blue) or WH (White). Order number of pieces required, in multiples of Standard Carton Quantity (Pallet).

Labels for TX5500™ Category 5e 25-Pair UTP Copper Cable



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Module Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label	
PUP5525IG-UY PUR5525IG-UY	S100X400YAJ	S100X400VATY	S100X400VAC	T100X000CBC-BK	


For complete labeling solutions and product information, reference charts on pages 0.1-0.25.

UL LISTED

Data-Patch [™] 10/100BASE-T Patch Panels

- Category 5e rated in the channel when used with Category 5e 25-pair cable assemblies
- Consist of female telco 50 pin/25 pair connectors with hook and loop fasteners wired per RJ21 industry standard for backward compatibility
- Each port is wired for 10/100BASE-T Ethernet utilizing pins 1, 2 and 3, 6
- · Does not require use of a punchdown tool

- Mount to standard EIA 19" rack or 23" racks with optional extender bracket
- Write-on areas for port and panel identification
- Optional label kits (DPLK24 and DPLK48) contain adhesive label holder and labels for easy port and panel identification
- Can be clearly identified with labels and icons



Part Number	Part Description	No. of Rack Spaces^	Pkg.	Std. Ctn. Qty.
DP24584TV25Y	24-port, Category 5e, patch panel with 24 RJ45 ports wired to two RJ21 Telco connectors.	1	1	10
DP48584TV25Y	48-port, Category 5e, patch panel with 48 RJ45 ports wired to four RJ21 Telco connectors.	2	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

For use with Data-Patch [™] 10/100BASE-T Cable Assemblies on page B.55.

Component Labels for Data-Patch™ 10/100BASE-T Patch Panels



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Panel Part NumberLaser/Ink Jet Desktop Printer LabelTDP43ME Thermal Transfer Desktop Printer LabelPanTher™ LS8E Hand-Held Printer LabelCougar™ LS9 Hand-Held Printer Label					
DP24584TV25Y DP48584TV25Y	C379X030FJJ	C379X030YPT	C379X030FJC	T031X000FJC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

В.	
Coppe	
System	

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

B. Copper Systems

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. **Physical** Infrastructure Management

J. Overhead & Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & **Bonding**

Industrial

0. Labeling & Identification


Cable Management Accessories

> 0. Index

Data-Patch™ Category 5e RJ21 to RJ45 Patch Panel

- Designed to exceed ANSI/TIA-568-C.2 Category 5e and ISO 11801 2nd Edition Class D standards
- Consist of female telco 50-pin/25-pair connectors with hook and loop fasteners wired per RJ21 industry standard for backward compatibility
- Each RJ45 port is fully wired for 10/100/1000BASE-T Ethernet performance utilizing all 8 pins
- Does not require use of a punchdown tool

- Mounts to standard EIA 19" rack or 23" racks with optional extender bracket
- · Write-on areas for port and panel identification
- Can be clearly identified with labels and icons
- Optional label kits (DPLK24 and DPLK48) contain adhesive label holder and labels for easy port and panel identification



DP485E88TV25


		No. of Rack	Std. Pkg.	Std. Ctn.
Part Number	Part Description	Spaces^	Qty.	Qty.
Data-Patch™ 10/	100/1000BASE-T RJ21 to RJ45 Angled Patch Pan	els		
DPA245E88TV25	24-port angled, Category 5e, RJ45, 8-pin, fully wired to 4-port RJ21 connector panel.	1	1	10
DPA485E88TV25	48-port angled, Category 5e, RJ45, 8-pin, fully wired to 8-port RJ21 connector panel.	2	1	10
Data-Patch™ 10/	100/1000BASE-T RJ21 to RJ45 Flat Patch Panels			
DP245E88TV25	24-port, Category 5e, RJ45, 8-pin, fully wired to 4-port RJ21 connector panel.	1	1	10
DP485E88TV25	48-port, Category 5e, RJ45, 8-pin, fully wired to 8-port RJ21 connector panel.	2	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Data-Patch [™] 10/100/1000BASE-T Cable Assemblies available on page B.55.

Component Labels for Data-Patch™ Category 5e RJ21 to RJ45 **Patch Panel**



	Suggested Label Solutions for TIA/EIA-606-A Compliance					
TDP43ME Thermal Laser/Ink Jet Desktop Part Number TDP43ME Thermal Transfer Desktop Printer Label Transfer Desktop Printer Label Hand-Held Printer Label Hand-Held Printer Label						
DPA245E88TV25 DPA485E88TV25 DP245E88TV25 DP485E88TV25	C379X030FJJ	C379X030YPT	C379X030FJC	T031X000FJC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

UL LISTED

®

Data-Patch™ 10/100/1000BASE-T Cable Assemblies

- Category 5e rated 25-pair connectorized cable assemblies are enhanced performance patch cords featuring 25-pair Category 5e solid cable with Category 5e, 25-pair RJ21 plugs on either end
- System also includes Category 5e rated 25-pair hydra with Category 5e, 25-pair male connectors on one end and six Pan-Plug® Modular Plugs on the other end
- System also include Category 5e rated RJ21 to MRJ21 with Category 5e 25-pair male connector on one end and MRJ21 male connector on the other
- All cords are 100% tested for wiring sequence and continuity



Part Number	Part Description	Length (Ft.)‡	Pkg.	Std. Ctn. Qty.
UTPCH8SR25Y	RJ21 plug to RJ21 plug, straight, 110° right orientation.	8	1	10
UTPCH8SL25Y	RJ21 plug to RJ21 plug, straight, 110° left orientation.	8	1	10
UTPCH8L25Y	RJ21 plug to RJ21 plug, both 110° left orientation.	8	1	10
UTPCH8R25Y	RJ21 plug to RJ21 plug, both 110° right orientation.	8	1	10
UTPCH8LR25Y	RJ21 plug to RJ21 plug, 110° left, 110° right orientation.	8	1	10
UTPCH86PP25	RJ21 plug to six Pan-Plug® Modular Plugs, straight.	8	1	10
UTPCH8SMRJ25	MRJ21 male connector to RJ21 connector, straight.	8	1	10

‡For lengths 6, 10, 15 and 20 replace 8 in part number for desired length. For example, the part number for a 15 foot straight and right 25-pair connectorized cable assembly is UTPCH15SR25Y.

Labels for Data-Patch™ 10/100/1000BASE-T Cable Assemblies



Suggested Label Solutions for TIA/EIA 606-A Compliance				
Cable Assemblies Part NumberLaser/Ink Jet Desktop Printer LabelTDP43ME Thermal Transfer Desktop Printer LabelPanTher™ LS8E Hand-Held Printer LabelCougar™ LS9 Hand-Held Printer Label				
All UTPCH8 Cable Assemblies on this page	S100X400YAJ	S100X400VATY	S100X400VAC	T100X000CBC-BK

For complete labeling solutions and product information, reference charts on pages 0.1-0.25.

B.	
Copp	e
Syste	m

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

r. Cable Management Accessories

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

RJ45 – HD68 and RJ45 – VHD68 SCSI Angled Patch Panel and Kits

- Used for console management of selected switching equipment
- Each port 100% electrically tested
- Angled patch panel is available individually or kitted with cable assemblies
- Female 68-pin sockets on panel meet ANSI T 10.1302D SCSI Parallel Interface-3 (SPI-3) standard
- Mount to standard EIA 19" rack or 23" racks with optional extender bracket
- Pre-printed numbers above each port for easy identification



TPK1A32R88S68Y

Part Number	Part Description	No. of Rack Spaces^		Std. Ctn. Qty.
TPA32R88S68Y	32-port angled patch panel with 32 RJ45 ports wired to four 68-pin SCSI connectors.	1	1	10
TPK1A32R88S68Y	32-port angled patch panel with 32 RJ45 ports wired to four 68-pin SCSI connectors kitted with four cable assemblies each 3 ft. long with 68-pin DB68 male plugs on both ends.	1	1	10
TPK2A32R88S68	32-port angled patch panel with 32 RJ45 ports wired to four 68 pin SCSI connectors kitted with four cable assemblies each 6 ft. long with 68-pin DB68 male plug on one end, and 68-pin VHD68 male plug on the other.	1	1	10

^One rack space = 1.75" (44.45mm). M6 and #12 - 24 mounting screws included.

Component Labels for RJ45 – HD68 and RJ45 – VHD68 SCSI Angled Patch Panel and Kits



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Panel Part NumberLaser/Ink Jet Desktop Printer LabelTDP43ME Thermal Transfer Desktop Printer LabelPanTher™ LS8E Hand-Held Printer LabelCougar™ LS9 Hand-Held Printer Label					
TPA32R88S68 TPK1A32R88S68	C379X030FJJ	C379X030YPT	C379X030FJC	T031X000FJC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

Copper Systems

C. Fiber Optic 0 Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution ١.

Physical Infrastructure Management

J. Overhead & Underfloor

Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

> 0. Index

Mini-Com® Mini-Jack™ Category 3 UTP Jack Modules LISTED CERTIFIED

- Patented lead frame termination style ensures twists are maintained to within 1/2"
- No punchdown tool required, optional termination tool (CJT-X) ensures conductors are fully terminated
- Termination cap provides excellent strain relief; helps control cable bend radius and securely retains wires
- Clear, removable termination cap provides easy troubleshooting
- Terminate 4-pair 24 and 22 AWG 100 ohm solid unshielded twisted pair cable
- Accept 6 and 8-position modular plugs without damage


- · White colored module base designates Category 3 performance
- Can be clearly identified with optional labels and icons
- Compatible with Mini-Com® Modular Patch Panels. Faceplates, and Surface Mount Boxes
- Optional RJ45 blockout device blocks out unauthorized access to jack modules and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair, and hardware replacement
- · Optional dust cap keeps out dust and debris while not









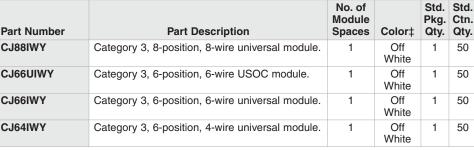

CJ66**Y



‡For standard colors other than Off White, replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), YL (Yellow), or BL (Black). Termination tools available on page B.97.

Component Labels for Mini-Com® Mini-Jack™ Category 3 UTP **Jack Modules**



Suggested Label Solutions for TIA/EIA-606-A Compliance				
Module Laser/Ink Jet Desktop Part Number Printer Label TDP43ME Thermal Transfer Desktop PanTher™ LS8E Cougar™ Hand-Held Printer Label				
All UTP Category 3 Jack Modules	C138X019FJJ	C138X019YPT	C138X019FJC	T019X000FJC-BK

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

B. Copper Systems

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

Wireless

G. Outlets

F.

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead & Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

> N. Industrial

0. Labeling & Identification

Cable Management Accessories

Index

Mini-Com® BAS Connector Module

- Standard field bus connector terminates up to three 18 - 22 AWG connectors or shielded/unshielded cable
- No punchdown tool required, terminates with screwdriver
- · Common declaration point for BAS networks and low voltage power for building systems
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CMBRS485OR	Module supplied with 22 AWG min/18 AWG max connector.	2	Orange	1	10

‡For other colors replace suffix OR (Orange) with BL (Black), BU (Blue), GR (Green), RD (Red), or YL (Yellow).

(I) Mini-Com® Blank Module

· Secures opening to prevent tampering

• Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CMBIW-X	1-position, reserves space for future use.	1	Off White	10	50

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray),

Mini-Com® F-Type Module

- Typical use in CATV applications
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- · Accepts RG-6 and RG-59 coaxial cable



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CMFIW	Module supplied with 75 ohm industry standard F-type coupler.	1	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Mini-Com® Self-Terminating F-Type Module

- · Eliminates need for termination cap on connector
- Automatically puts 75 ohm load on cable run when cable is disconnected
- · Reduces noise and interference on the line

 Compatible with Mini-Com® Modular Patch Panels
Faceplates, and Surface Mount Boxes

- Accepts RG-6 and RG-59 coaxial cable
- Rated 2GHz



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CMFSRIWY	Module supplied with 75 ohm self-terminating F-type coupler.	1	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray),

Mini-Com® 15-Pin High-Density D-Subminiature Module

- Field terminable module features 15-pin screw terminal
- Dual module configuration allows it to be installed in Mini-Com® Faceplates (plastic and stainless steel)
- SVGA compatible
- Compatible with select Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CMD15HDIWY	2-position module supplied with one 15-pin DB connector mounted to a printed circuit board; terminates on site.	2	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).



Mini-Com® Module Base for D-Subminiature Connectors

- Accepts 9-pin or 15-pin high-density connector, male or female, solder or crimp type (connector not included)
- Compatible with select Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CMDBIW-X	2-position module base which accepts 9-pin and 15-pin high density D-subminiature connectors.	2	Off White	10	100

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Copper Systems

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

N.

0. Labeling & Identification

Cable Management Accessories

> 0. Index

D-Subminiature Inserts

· Used in audio and video applications

· Compatible with classic and executive faceplate frames







CHD9CIWY CHD15HDCIWY

CHD15HDSCIWY

Part Number	Part Description	Color‡	Std. Pkg. Qty.	
CHD9CIWY	1/3 insert with 9-pin female to female coupler.	Off White	1	10
CHD15HDCIWY	1/3 insert with 15-pin high density female to female coupler; SVGA capable.	Off White	1	10
CHD15HDSCIWY	1/3 insert with one 15-pin DB connector mounted to a printed circuit board; terminates on site; SVGA capable.	Off White	1	10

‡For other colors, replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Compatible with Classic and Executive Faceplate Frames on page G.14.

Component Labels for Mini-Com® D-Subminiature Inserts




Suggested Label Solutions for TIA/EIA-606-A Compliance					
Faceplate Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label	
CHD9C**Y					
CHD15HDC**Y	C125X030FJJ	C125X030YPT	C125X030FJC	T031X000FJC-BK	
CHD15HDSC**Y					

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

• Used in audio and video applications



CHR3RGBIW

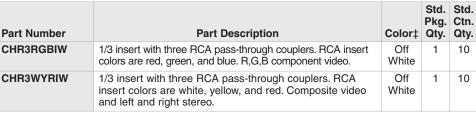

Compatible with classic and executive faceplate frames

‡ For other colors, replace suffix IW (Off White) with EI (Electric Ivory), WH (White), or IG (International Gray). Compatible with Classic and Executive Faceplate Frames on page G.14.



CHR3WYRIW

Mini-Com® S-Video Punchdown Module

- Terminates 24 and 22 AWG solid or stranded conductors
- Utilizes Category 5e unshielded twisted pair or higher network cable facilitating a common, easy, and cost effective cabling installation; only four of the eight network cable conductors need to be terminated per cable
- · Includes wire retention cap
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CJSVIW	Module supplied with one S-Video connector.	1	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Punchdown termination tool available on page B.91.

Optional punchdown base (AVPDB), available on page B.97.

B.	
Copp	e
Syste	m

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Mini-Com® S-Video Pass-Through Module

- · Supplied with one 4-pin mini DIN coupler
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	
CMSVCIWY	Module supplied with one S-video pass-through coupler.	1	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Mini-Com® RCA 110 Punchdown Modules

- Terminate 24 and 22 AWG solid or stranded conductors
- Utilize Category 5e unshielded twisted pair or higher network cable facilitating a common, easy, and cost effective cabling installation; only two of the eight network cable conductors need to be terminated per cable
- Include wire retention cap
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



CJRY

Part Number	Part Description	No. of Module Spaces	Insert Color	Color‡	Std. Pkg. Qty.	
CJRYIW	Module supplied with one RCA connector with yellow insert.	1	Yellow	Off White	1	10
CJRRIW	Module supplied with one RCA connector with red insert.	1	Red	Off White	1	10
CJRWIW	Module supplied with one RCA connector with white insert.	1	White	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black)

Punchdown termination tool available on page B.91.

Optional punchdown base (AVPDB), available on page B.97.

Mini-Com® RCA Pass-Through Modules

Supplied with one RCA coupler

 Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



CMRPR

Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Std. Ctn. Qty.
CMRPRIW	Module supplied with one RCA pass-through coupler with red insert.	1	Off White	1	10
CMRPYIW	Module supplied with one RCA pass-through coupler with yellow insert.	1	Off White	1	10
CMRPWIW	Module supplied with one RCA pass-through coupler with white insert.	1	Off White	1	10
CMRPBIW	Module supplied with one RCA pass-through coupler with blue insert.	1	Off White	1	10
CMRPGIW	Module supplied with one RCA pass-through coupler with green insert.	1	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Optic

Systems

G. **Outlets**

Distribution

Cable Management Accessories

> Q. Index

Mini-Com[®] 3.5mm Stereo Connector and Coupler Modules

- Supplied with one solder-type connector or coupler
- Accept male plug found on typical stereo headsets
- Solder-type connector accepts 22 AWG stereo wire or smaller
- Insulation resistance exceeds 100 milli-ohms at DC 500V
- · Rated for DC 12V., 1A
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



CM35MSS

Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	
CM35MSCIWY	3.5mm stereo coupler module.	1	Off White	1	10
CM35MSSIW	Module supplied with one 3.5mm (1/8") stereo headset solder-type connector.	1	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Mini-Com® 5-Way Binding Post Modules

- Allow for easy installation of speaker wires, along with the ability to reconfigure speaker locations with greater ease
- Accept a variety of termination ends, including bare speaker wire (10 - 12 AWG) and banana plugs
- · Gold plated and large metal contact area facilitates improved signal transmission
- Red or black stripe around collar of binding post clearly designates speaker connection
- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes



CMBPB**Y

Part Number	Part Description	No. of Module Spaces	Color‡	Pkg.	Std. Ctn. Qty.
CMBPBIWY	Module supplied with one 5-way binding post with black stripe.	1	Off White	1	10
CMBPRIWY	Module supplied with one 5-way binding post with red stripe.	1	Off White	1	10

‡For other colors, replace suffix IW (Off White) with EI (Electric Ivory) or WH (White).

B. Copper **Systems**

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G.

Outlets

Media Distribution

I. **Physical** Infrastructure Management

Overhead & Underfloor Routing

J.

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

Mini-Com® BNC Coax Coupler Modules

- Accept BNC plugs
- Available in 50 and 75 ohm versions

- Compatible with Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- Accept RG-6 and RG-59 coaxial cable



CMBA75IWY

Part Number	Part Description	No. of Module Spaces	Color‡	Std. Pkg. Qty.	Ctn.
CMBA75IWY	Module supplied with 75 ohm industry standard BNC coupler.	1	Off White	1	10
CMBAIWY	Module supplied with 50 ohm industry standard BNC coupler.	1	Off White	1	10

‡For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Mini-Com® HDMI Coupler

- · Delivers audio and video signals in digital format
- Supports Category 1 (standard) and Category 2 (high speed) HDMI cable
- · Backwards compatible

- Compatible with select Mini-Com® Modular Patch Panels, Faceplates, and Surface Mount Boxes
- · Length limitation determined by quality of the cable and type of device installed. Twinax cable recommended.



CMHDMIIW

Part Number	Part Description	No. of Module Spaces	Color*	_	Std. Ctn. Qty.
CMHDMIIW	HDMI 1.3 Type A female to female Category 2 coupler module.	2	Off White	1	10

^{*}For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black).

Mini-Com® USB Coupler

- · Interface for transmitting data between devices such as scanners, digital cameras, printers, etc.
- Supports cable lengths up to 15 feet between devices
- Accepts USB 2.0 Patch Cords and is backwards compatible with USB 1.1 Patch Cords
- Compatible with all Mini-Com® Faceplates, Patch Panels and select Surface Mount Boxes



CMUSBAAIW

Part Number	Part Description	No. of Module Spaces	Color*	Pkg.	Std. Ctn. Qty.
CMUSBAAIW	USB 2.0 female A to female A coupler module.	1	Off White	1	10

^{*}For other colors replace suffix IW (Off White) with EI (Electric Ivory), WH (White), IG (International Gray), or BL (Black)

BNC Coupler Patch Panel

• Mounts to standard EIA 19" rack or 23" racks with optional extender bracket



Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	Ctn.
CP48BNCBLY	48-port patch panel with 48 pre-installed 75 ohm BNC couplers.	1	1	10

^One rack space = 1.75" (44.45mm). M6 and #12-24 mounting screws included.



Voice Patch Panel

- Consists of single female telco 50-pin/25-pair connector with hook and loop fasteners wired for common active voice equipment
- 24 RJ45 ports with pins 4 and 5 active in each port
- Telco connector with hook and loop fasteners accommodate 180, 110, or 90 degree patch cord connectors on back of patch panel
- Does not require use of a punchdown tool
- Mounts to standard EIA 19" rack or 23" racks with optional extender bracket
- · Write-on areas available for port identification
- · Can be clearly identified with optional labels and icons



		200000	000000	6
,	VP24382	2TV25Y		

Part Number	Part Description	Rack Spaces^	Pkg.	Ctn. Qty.
VP24382TV25Y	24-port patch panel with 24 RJ45 ports wired to one RJ21 telco connector.	1	1	10

^One rack space = 1.75" (44.45mm). M6 and #12-24 mounting screws included.

Component Labels for Voice Patch Panel



Suggested Label Solutions for TIA/EIA-606-A Compliance					
				Cougar™ LS9 Hand-Held Printer Label	
VP24382TV25Y	C379X030FJJ	C379X030YPT	C379X030FJC	T031X000FJC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Copper Systems

C. Fiber Optic 0 Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

No of Std Std

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper **Systems**

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

> G. Outlets

Media Distribution

Ι. Physical Infrastructure Managemer

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & **Bonding**

N. Industrial

0. Labeling & Identification

Cable Managemen Accessories

> 0. Index

Mini-Com® Ultimate ID® Modular Patch Panels

- Ultimate ID® components are part of a complete system for identification designed to efficiently support TIA/EIA-606-A standard labeling requirements
- · Angled patch panels facilitate proper bend radius control and minimize the need for horizontal cable managers
- Mount to standard EIA 19" rack or 23" racks with optional extender bracket
- Accept Mini-Com® Modules for UTP, fiber optic, and audio/video, which snap in and out for easy moves, adds, and changes
- Can be clearly identified with the PanTher[™] LS8E or Cougar™ LS9 Hand-Held Thermal Transfer Printers
- · Non-adhesive computer printable label sheets for desktop printers and write-on labels available

No of

- Replacement label covers available
- · Labels sold separately

(ULTIMATE

C+4 C+4



UICMPPA24BLY





UICMPPA48BLY





UICMPP48BLY

	Part Number	Part Description	Rack Spaces^	Labels Required	Pkg. Qty.	Ctn. Qty.
D	Mini-Com® Ultir	nate ID® Angled Modular Patch Panels				
	UICMPPA24BLY	24-port angled patch panel with six UICPPL4BL Mini-Com® Ultimate ID® Faceplates.	1	Six 4-Port	1	10
	UICMPPA48BLY	48-port angled patch panel with twelve UICPPL4BL Mini-Com® Ultimate ID® Faceplates.	2	Twelve 4-Port	1	10
	Mini-Com® Ultir	nate ID® Modular Patch Panels				
	UICMPP24BLY	24-port patch panel with six UICPPL4BL Mini-Com® Ultimate ID® Faceplates.	1	Six 4-Port	1	10
	UICMPP48BLY	48-port patch panel with twelve UICPPL4BL Mini-Com® Ultimate ID® Faceplates.	2	Twelve 4-Port	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Modular patch panels shown include labels installed; labels sold separately.

Mini-Com® Ultimate ID® Patch Panel Faceplates

- Ultimate ID® components are part of a complete system for identification designed to efficiently support TIA/EIA-606-A standard labeling requirements; reference page A.17 for a complete system overview
- · Accept Mini-Com® Modules for UTP, fiber optic, and audio/video, which snap in and out for easy moves, adds, and changes
- Allow for custom configuration of Ultimate ID[™] Patch Panels

- Supplied with label covers; labels sold separately
- Two label pocket faceplate allows port and panel identification; also permits patch cords to be routed without blocking port ID
- Can be clearly identified with the PanTher[™] LS8E or Cougar™ LS9 Hand-Held Thermal Transfer Printers
- Non-adhesive computer printable label sheets for desktop printers and write-on labels available
- Replacement label covers available







UICPP2L4BL



UICPPL4BL

Part Number	Part Description	Labels Required	Std. Pkg. Qty.	
UICPP2L4BL	Patch panel faceplate with two label pockets; accepts up to four Mini-Com® Modules.	Two 4-Port	1	10
UICPPL4BL	Patch panel faceplate with one label pocket; accepts up to four Mini-Com® Modules.	One 4-Port	1	10

Faceplates shown with labels installed, labels sold separately. Ultimate ID® Labels can be found on pages O.11 and O.21.

UL LISTED



Mini-Com® Flush Mount Modular Patch Panels

- Rear mounted faceplates allow modules to be flush with front of patch panel
- Accept Mini-Com® Modules for UTP, fiber optic, and audio/video, which snap in and out for easy moves, adds, and changes
- Pre-printed numbers above each port for easy identification
- White write-on areas for port and/or panel identification
- Mount to standard EIA 19" racks or 23" racks with optional extender brackets
- Angled patch panels facilitate proper bend radius control and minimize the need for horizontal cable managers

CPPA24FMWBLY PATENTED
CPPA48FMWBLY
CPP24FMWBLY
CPP48FMWBLY

Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	
Mini-Com® Angled				
CPPA24FMWBLY	Angled 24-port flush mount patch panel supplied with rear mounted faceplates.	1	1	10
CPPA48FMWBLY	Angled 48-port flush mount patch panel supplied with rear mounted faceplates.	2	1	10
Mini-Com® Flush N	Iount Modular Patch Panels			
CPP24FMWBLY	24-port flush mount patch panel supplied with rear mounted faceplates.	1	1	10
CPP48FMWBLY	48-port flush mount patch panel supplied with rear mounted faceplates.	2	1	10

^One rack space = 1.75" (44.45mm). M6 and #12-24 mounting screws included.

Component Labels for Mini-Com® Flush Mount Modular Patch Panels



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Panel Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label	
All Flush Mount Patch Panels on this page	C252X030FJJ	C252X030YPT	C252X030FJC	T031X000FJC-BK	

For complete labeling solutions and product information, reference charts on pages 0.1-0.25.

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

R. Copper **Systems**

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. Physical Infrastructure Management

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & **Bonding**

Industrial

0. Labeling & Identification


Cable Management Accessories

> 0. Index

Mini-Com® High Density Modular Patch Panels

- Accept Mini-Com® Modules for UTP, fiber optic, and audio/video, which snap in and out for easy moves, adds, and changes
- · Conserve valuable rack space, but may be limited to specific modules (UTP)
- Pre-printed numbers above each port for easy identification

- Mount to standard EIA 19" racks or 23" racks with optional extender brackets
- Angled patch panels facilitate proper bend radius control and minimize the need for horizontal cable managers
- Enhanced label version of 48-port high density patch panels only accept UTP modules

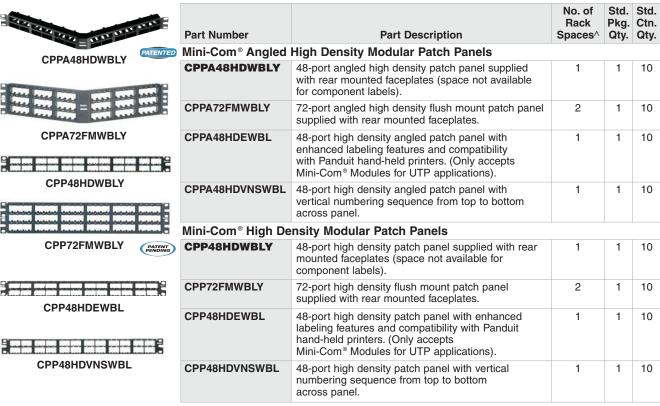

[^]One rack space = 1.75" (44.45mm). M6 and #12-24 mounting screws included.

Component Labels for Mini-Com® High Density Modular Patch Panels



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Panel Part NumberLaser/Ink Jet Desktop Printer LabelTDP43ME Thermal Transfer Desktop Printer LabelPanTher™ LS8E Hand-Held Printer LabelCougar™ LS9 Hand-Held Printer Label					
CPPA72FMWBLY CPP72FMWBLY CPPA48HDEWBL CPP48HDEWBL	C261X030FJJ	C261X030YPT	C261X030FJC	T031X000FJC-BK	

⁴⁸⁻port high density patch panel layout does not allow space for component labels. For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Mini-Com® Modular Faceplate Patch Panels

- · Release snap feature on faceplate allows front access to installed modules
- · Accept Mini-Com® Modules for UTP, fiber optic, and audio/video, which snap in and out for easy moves, adds, and changes
- Label versions available for easy port identification; replacement label/label covers available
- Mount to standard EIA 19" racks or 23" racks with optional extender brackets
- Angled patch panels facilitate proper bend radius control and minimize the need for horizontal cable managers

नित्त हरू हरू = इस्स वर्ग	1
CPPLA24WBLY	PATENTED
	E



CPPLA48WBLY





CPPL48WBLY



CPP24WBLY



CPP48WBLY



C4PPLK

Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	Std. Ctn. Qty.
Mini-Com® Angl	ed Modular Patch Panels with Labels	-		_
CPPLA24WBLY	24-port angled patch panel with labels, supplied with six factory installed CFFPL4 type front removable snap-in faceplates.	1	1	10
CPPLA48WBLY	48-port angled patch panel with labels, supplied with twelve factory installed CFFPL4 type front removable snap-in faceplates.	2	1	10
Mini-Com® Modu	ular Patch Panels with Labels			
CPPL24WBLY	24-port patch panel with labels, supplied with six factory installed CFFPL4 type front removable snap-in faceplates.	1	1	10
CPPL48WBLY	48-port patch panel with labels, supplied with twelve factory installed CFFPL4 type front removable snap-in faceplates.	2	1	10
Mini-Com® Modu	ular Patch Panels	ı		
CPP24WBLY	24-port patch panel supplied with six factory installed CFFP4 type front removable snap-in faceplates.	1	1	10
CPP48WBLY	48-port patch panel supplied with twelve factory installed CFFP4 type front removable snap-in faceplates.	2	1	10
Replacement La	bels for Mini-Com [®] Modular Patch Panels			
C4PPLK	Replacement label/label cover kit for Mini-Com® Modular Patch Panels with Labels (CPPL24WBLY, CPPL48WBLY, CPPL48WBLY) and Mini-Com® Modular Furniture Faceplates with Labels (CFFPL4, CFPHSL4, CFFPEBSL4). Each kit contains six labels and six clear label covers per bag.	_	1	10

^One rack space = 1.75" (44.45mm). M6 and #12-24 mounting screws included.

Component Labels for Mini-Com® Modular Faceplate Patch Panels



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Panel Part Number Laser/Ink Jet Desktop Printer Label TDP43ME Thermal Transfer Desktop Printer Label Desktop Printer Label PanTher™ LS8E Cougar™ LS9 Hand-Held Printer Label Hand-Held Printer Label PanTher™ LS8E Cougar™ LS9					
All Patch Panels on this Page	C261X035Y1J	C261X035Y1T	C261X035Y1C	T038X000FJC-BK‡	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25. ‡For non-adhesive labeling solution, do not remove liner from label.

Copper Systems

C. Fiber Optic 0 Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Mini-Com® M6 Style Modular Faceplate Patch Panels


- Arrange modules in groups of six (M6)
- · Allow front access to installed modules
- Accept Mini-Com® Modules for UTP, fiber optic, and audio/video, which snap in and out for easy moves, adds, and changes
- Include pre-printed numbered labels with writable surface on back when pre-numbered labels are not applicable
- Mount to standard EIA 19" racks or 23" racks with optional extender brackets



CPPL48M6BLY

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24

C6PPLK1-24



C6PPLK25-48

Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	Ctn.
Mini-Com® M6	Style Modular Faceplate Patch Panels			
CPPL24M6BLY	24-port patch panel supplied with four factory installed CFPLM6BL snap-in faceplates.	1	1	10
CPPL48M6BLY	48-port patch panel supplied with eight factory installed CFPLM6BL snap-in faceplates.	2	1	10
D 1	- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1	D D		

Replacement I	Patch Pan	els		
C6PPLK1-24	Replacement labels for Mini-Com® M6 Style Modular Faceplate Patch Panels with label/label covers (CPPL24M6BLY). Labels are pre-printed 1 – 24 on one side and write-on area on reverse side.	_	1	10
C6PPLK25-48	Replacement labels for Mini-Com® M6 Style Modular Faceplate Patch Panels with label/label covers (CPPL**M6BLY). Labels are pre-printed 25 – 48 on one side and write-on area on reverse side.	_	1	10

^One rack space = 1.75" (44.45mm). M6 and #12-24 mounting screws included.

Component Labels for Mini-Com[®] M6 Style Modular Faceplate Patch Panels



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Panel Part NumberLaser/Ink Jet Desktop Printer LabelTDP43ME Thermal Transfer Desktop Printer LabelPanTher™ LS8E Hand-Held Printer LabelCougar™ L Hand-Held Printer					
CPPL24M6BLY CPPL48M6BLY	C390X030Y1J	C390X030Y1T	C390X030Y1C	T031X000FJC-BK‡	

For complete labeling solutions and product information, reference charts on pages 0.1-0.25. \ddagger For non-adhesive labeling solution, do not remove liner from label.



Mini-Com® Recessed Modular Faceplate Patch Panels

- 3" recessed feature eliminates patch cord interference with cabinet doors and improves bend radius protection
- · Release snap feature on faceplate allows front access to installed modules
- Accept Mini-Com® Modules for UTP, fiber optic, and audio/video, which snap in and out for easy moves, adds, and changes
- Labels included for easy port identification, replacement label/label covers available
- Mount to standard EIA 19" racks or 23" racks with optional extender brackets







Part Number Part Description Spaces^ Qty. Qty. CPPL24WRBLY 24-port recessed patch panel with labels, supplied with six 1 10 factory installed CFFPL4 type front removable snap-in faceplates. Designed for use with racks and cabinets. **CPPL48WRBLY** 48-port recessed patch panel with labels, supplied with 2 1 10 twelve factory installed CFFPL4 type front removable snap-in faceplates. Designed for use with racks and cabinets. C4PPLK Replacement label/label cover kit for Mini-Com® 1 10 Modular Patch Panels with Labels (CPPL24WBLY, CPPL48WBLY, CPPL24WRBLY, CPPL48WRBLY) and Mini-Com® Modular Furniture Faceplates with Labels (CFFPL4, CFPHSL4, CFFPEBSL4). Each kit contains six labels and six clear label covers per bag.

^One rack space = 1.75" (44.45mm). M6 and #12-24 mounting screws included.

Component Labels for Mini-Com® Recessed Modular Faceplate **Patch Panels**



Suggested Label Solutions for TIA/EIA-606-A Compliance				
Patch Panel Laser/Ink Jet Desktop Part Number Label TDP43ME Thermal Transfer Desktop Printer Label Desktop Desk				
CPPL24WRBLY CPPL48WRBLY	C261X035Y1J	C261X035Y1T	C261X035Y1C	T038X000FJC-BK‡

For complete labeling solutions and product information, reference charts on pages O.1 - O.25. ‡For non-adhesive labeling solution, do not remove liner from label.

Copper Systems

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

Std. Std.

Pkg.

Ctn.

No. of

Rack

F. Wireless

> G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Mini-Com® 12-Port Modular Faceplate Patch Panels

- Release snap feature on faceplate allows simple front access for termination and accessibility to installed modules
- Accept Mini-Com® Modules for UTP, fiber optic, and audio/video, which snap in and out for easy moves, adds, and changes
- · Mount directly onto wall
- Modular design for easy cabling revisions





CPP12WBL

Part Number	Part Description	Std. Pkg. Qty.	
CWPP12WBL	12-port patch panel supplied with three factory installed CFFP4 snap-in faceplates with integrated wall mount bracket.	1	10
CPP12WBL	12-port patch panel supplied with three factory installed CFFP4 snap-in faceplates. Mounts to standard 89D bracket (WB89D).	1	10
WB89D	Wall mount bracket accepts 12-port snap-in faceplate patch panel. Can also be used to mount industry standard 66 blocks.	1	10



WB89D

Component Labels for Mini-Com® 12-Port Modular Faceplate Patch Panels



Suggested Label Solutions for TIA/EIA-606-A Compliance				
Patch Panel Laser/Ink Jet Desktop Printer Label Desktop Printer				
CWPP12WBL CPP12WBL	C261X030FJJ	C261X030YPT	C261X030FJC	T031X000FJC-BK

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.


Mini-Com® All Metal Shielded Modular Patch Panels

- Accept Mini-Com® Modules for shielded applications
- Provide write-on areas for port identification
- · Made of stainless steel

- · CPT removal tool allows easy moves, adds, and changes of shielded jack modules
- Mount to standard TIA/EIA 19" rack or 23" racks with optional extender bracket






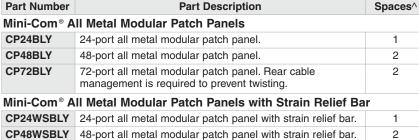














CP48WSBLY

M6 and #12-24 mounting screws included.

Each patch panel includes the CPT tool to ease removal of Mini-Com® Shielded Jack Modules.

Contact Customer Service for other available port options.


To bond the patch panel, see the patent pending StructuredGround ™Bonding Hardware Kits on page M.26.





CPA48BLY

Component Labels for Mini-Com® All Metal Shielded Modular **Patch Panels**



Suggested Labels Solutions for TIA/EIA-606-A Compliance				
Patch Panel Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label
All Metal Shielded Modular Patch Panels on this page	C252X030FJJ	C252X030YPT	C252X030FJC	T031X000FJC-BK

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

Copper Systems

C. Fiber Optic 0 Systems

D. Power over **Ethernet**

Std. Std.

Pkg. Ctn.

10

10

10

10

10

Qty. Qty.

1

1

1

1

1

No. of Rack

1

2

2

1

2

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. **Physical** Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Strain Relief Bar with Clips

- Mounts to the rear of standard EIA 19" racks behind each patch panel
- Supports 24 cables with hinged dual clips and provides bend radius protection
- Each adjustable clip can hold up to two cables; accommodates cable diameter range from 0.170" – 0.330" (4.3mm – 8.4mm)
- Provides superior aesthetics in cable management




	Part Number	Part Description	No. of Rack Spaces^	Pkg.	.,,
•	SRBWCY	Strain relief bar with integrated adjustable clips; supports, manages, and provides bend radius protection for up to 24 cables in 1 RU.	1	1	10

^One rack space = 1.75" (44.45mm).

(I) Strain Relief Bars for Patch Panels

- Mount to standard EIA 19" racks
- Ideal for standard density patch panels (24 ports per RU)
- Tak-Ty® Hook & Loop Cable Ties can be used for additional cable management

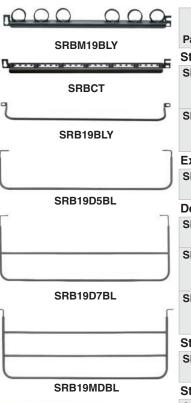

SRBS19BL-XY

SRBBRKT

Part Number	Part Description	Pkg. Qty.	Ctn. Qty.	
Strain Relief B	ar/Manager			
SRBM19BLY	Strain relief bar with six Tak-Ty® Hook & Loop Cable Ties; supports, manages, and provides proper bend radius protection for up to 72 cables.	1	10	
SRBCT	Strain relief bar includes 24 cable ties to secure cable to each individual slot for additional stability; supports, manages, and provides proper bend radius protection.	1	10	
Extended Stra	in Relief Bar			
SRB19BLY	Strain relief bar extends 2" off the rack; supports, manages, and provides proper bend radius protection.	1	10	
Deep Strain Relief Bar				
SRB19D5BL	Strain relief bar extends 5" off the rack; supports, manages, and provides proper bend radius protection.	1	10	
SRB19D7BL	Strain relief bar extends 7" off the rack; supports, manages, and provides proper bend radius protection. Ideal for use with Category 6A copper cabling installations.	1	10	
SRB19MDBL	Strain relief multi-depth bar extends 7" off the rack; supports, manages, and provides proper bend radius protection. Ideal for use with Category 6A copper cabling installations.	1	10	
Straight Strain	Relief Bar			
SRBS19BL-XY	Strain relief bar; supports, manages, and provides proper bend radius protection.	10	_	
Strain Relief B	ar Brackets			
SRBBRKT	Quick release brackets for strain relief bars; convert conventional screw mounting to quick release mounting/removal.	1	10	

#12-24 mounting screws included.

B.74

Std. Std.

System **Overview**

Copper Systems

C. Fiber Optic 0 Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> Q. Index

Cross Connect Punchdown System

- Exceeds all ANSI/TIA-568-C.2 Category 6 and 5e standard requirements for voice and data applications
- Third party tested
- Multiple mounting configurations allow brackets to be mounted to back board or wall maximizing the use of valuable space
- Integrated mounting notches are compatible with standard cross connect mounting brackets providing maximum design flexibility for new and existing Category 6 and Category 5e installations
- Mounting bases accept 4 and 5-pair connecting blocks up to 50 or 300-pairs
- 4 or 5-pair terminal markings on connecting blocks speed installation by assisting in punchdown terminal identification
- Punchdown tool terminates 22 26 AWG UTP cable
- Optional deep trough cable distribution ring maintains proper bend radius control providing improved cable management in 300 pair mounting systems for both horizontal and vertical cable routing
- Optional label kit compatible with 50 and 300-pair Panduit Cross Connect Bases; enables port identification enabling compliance according to ANSI/TIA/EIA-606-A labeling standards



PXMT50



PXMT300




PXPCB4

0000	CILE	000	Hell		ш	ппп	m	ш	ш	•
------	------	-----	------	--	---	-----	---	---	---	---

PXPCB5





PXLK-VI

Part Number	Part Description	Std. Pkg. Qty.		
Mounting Ba	ses			
PXMT50	50-pair mounting base.	1	0	
PXMT300	300-pair mounting base.		0	
Connecting Blocks				
PXPCB4	4-pair cross connect block.	1	20	
PXPCB5	5-pair cross connect block.	1	20	
Accessories		'		
PXDR	Cross connect cable distribution ring.	1	10	
PXLK-VI	Cross connect label kit includes six labels and six label holders. Compatible with 50 and 300-pair cross connect bases.	6	60	

For termination, use tool PDT110, found on page B.91, with blade 10665000 (available from Fluke).

R. Copper Systems

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

GP6™ PLUS Category 6 High Density Kits

- Exceed ANSI/TIA-568-C.2 Category 6 standard
- · Ideal for use in cross-connects and consolidation point applications
- Provides pre-packaged components necessary for termination
- Kit includes required quantity of bases and 4-pair connecting blocks, label holders and labels
- · Highly visible color-coded wiring slots ease wiring



GPKBW144Y



GPKBW432Y

Part Number	Part Description	Std. Pkg. Qty.	
GPKBW144Y	144-pair (36-port) Category 6 high-density punchdown field termination kit with legs.	1	10
GPKBW432Y	432-pair (108-port) Category 6 high-density punchdown field termination kit with legs.	1	10

Cable requirement: terminates most 22-26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d.. either PVC or plenum rated.

Termination tool available on page B.83.

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 PLUS components.

Can be clearly identified with labels found on page B.80.

GP6™ PLUS Category 6 Standard Density Kits

- Exceed ANSI/TIA-568-C.2 Category 6 standard
- · Ideal for use in cross-connects and consolidation point applications
- Provide pre-packaged components necessary for termination
- · Kit includes required quantity of bases and 4-pair connecting blocks, label holders and labels
- · Highly visible color-coded wiring slots ease wiring



GPKBW24Y



GPKBW72Y

Part Number	Part Description	Std. Pkg. Qty.	
GPKBW24Y	96-pair (24-port) Category 6 punchdown base field termination kit with legs.	1	10
GPKBW72Y	288-pair (72-port) Category 6 punchdown base field termination kit with legs.	1	10

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

Termination tool available on page B.83.

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 PLUS components. Can be clearly identified with labels found on page B.80.

Systems

Physical Infrastructure

Routing

Accessories Q.

Index

GP6™ PLUS Category 6 High Density Rack Mount Panel Kits

- Exceed ANSI/TIA-568-C.2 Category 6 standard
- Ideal for use in cross-connects and consolidation point applications
- Provide pre-packaged components necessary for termination
- Include required quantity of bases and 4-pair connecting blocks, label holders, and labels
- Highly visible color-coded wiring slots ease wiring
- Mount to standard TIA/FIA 19" racks



GPB2884R2Y



GPB2884R4WJY

Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	
GPB2884R2Y	Two 144-pair (36-port) Category 6 punchdown bases pre-mounted to a panel with 4-pair connector kit included.	2	1	10
GPB2884R4WJY	Two 144-pair (36-port) Category 6 punchdown bases and jumper troughs pre-mounted to a panel with 4-pair connector kit included.	4	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Termination tool available on page B.83.

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 PLUS components. Can be clearly identified with labels found on page B.80.



GP6™ PLUS Category 6 Standard Density Rack Mount Panel Kits

- Exceed ANSI/TIA-568-C.2 Category 6 standard
- Ideal for use in cross-connects and consolidation point applications
- Provide pre-packaged components necessary for termination
- Include required quantity of bases and 4-pair connecting blocks, label holders, and labels
- · Highly visible color-coded wiring slots ease wiring
- Mount to standard TIA/EIA 19" racks



GPB484R2Y



GPB484R4WJY

Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	Std. Ctn. Qty.
GPB484R2Y	Two 96-pair (24-port) Category 6 punchdown bases pre-mounted to panel with 4-pair connector kit included.	2	1	10
GPB484R4WJY	Two 96-pair (24-port) Category 6 punchdown bases and jumper troughs pre-mounted to panel with 4-pair connector kit included.	4	1	10

^One rack space = 1.75" (44.45mm).

M6 and #12-24 mounting screws included.

Termination tool available on page B.83.

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 PLUS components. Can be clearly identified with labels found on page B.80.

R. Copper Systems

C. Fiber **Optic** Systems

D. Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead 8 Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

Index

GP6™ PLUS Category 6 Connecting Blocks

- Exceed ANSI/TIA-568-C.2 Category 6 standard
- Available in 4 or 5-pair connection blocks
- · Highly visible color-coded wiring slots ease wiring
- Can be terminated with single or multiple position punchdown tools
- Can be utilized with discrete wires or GP6™ PLUS Patch Cord Connector
- Constructed of UL 94V-0 high impact polycarbonate material
- Patented single piece robust construction
- Optional 4-pair retaining clip (GPRC4) provides additional conductor retention and minimizes errors during moves, adds, and changes





GPCB5-*Y

Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.		
4-Pair Conne	4-Pair Connecting Block				
GPCB4-XY	4-pair Category 6 punchdown connecting block.	10	1000		
GPCB4-CY	4-pair Category 6 punchdown connecting block.	100	1000		
5-Pair Conne	ecting Block	<u>'</u>			
GPCB5-XY	5-pair Category 6 punchdown connecting block.	10	1000		
GPCB5-CY	1 0 1 1		1000		

Termination tool available on page B.83.

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 PLUS components.



GP6™ PLUS Category 6 High Density Bases

- Exceed ANSI/TIA-568-C.2 Category 6 standard
- Ideal for use in cross-connects and consolidation point applications
- Highly visible color-coded wiring slots eases wiring
- Sturdy one-piece design

- · Available with or without mounting legs for a variety of mounting options
- Multiple mounting holes available







GPB144-X

GPBW144-X



GPB432-X

GPBW432-X

	Part Number	Part Description	Pkg Qty	g.
•	144-Pair (36-Po	ort) Base		
	GPB144-X	Positions and holds UTP wire for termination with Category 6 punchdown connecting blocks.	10	1
•	144-Pair (36-Po	ort) Base – with Legs		
	GPBW144-X	Positions and holds UTP wire for termination with Category 6 punchdown connecting blocks, includes mounting legs.	10	,
4	432-Pair (108-P	Port) Base		
	GPB432-X	Positions and holds UTP wire for termination with Category 6 punchdown connecting blocks.	10	•
4	432-Pair (108-P	ort) Base – with Legs		
	GPBW432-X	Positions and holds UTP wire for termination with Category 6 punchdown connecting blocks, includes mounting legs.	10	1

Termination tool available on page B.83.

For rack mount applications see page B.85

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 PLUS components. Can be clearly identified with label holders and recommended labels shown on page B.80.

Std

GP6™ PLUS Category 6 Standard Density Bases

- Exceed ANSI/TIA-568-C.2 Category 6 standard
- · Ideal for use in cross-connects and consolidation point applications
- · Highly visible color-coded wiring slots ease wiring

Part Number

- Sturdy one-piece design
- · Available with or without mounting legs for a variety of mounting options
- · Multiple mounting holes available

Part Description



GPB24-X

TIGIT



1	WITTE TO THE TANK
1	THE THE PARTY OF T
2	THE TANK
13	The case of the ca
100	Part of the second

GPB72-X GPBW72-X

N.		· ·		
N.	96-Pair (24-Por	t) Category 6 Punchdown Base		
	GPB24-X	Positions and holds UTP wire for termination with Category 6 connecting blocks.	10	
	96-Pair (24-Por	t) Category 6 Punchdown Base – with Legs		
	GPBW24-X	Positions and holds UTP wire for termination with Category 6 connecting blocks, includes mounting legs.	5 ,	
	288-Pair (72-Po	rt) Category 6 Punchdown Base		
W. M. W. M.	GPB72-X	Positions and holds UTP wire for termination with Category 6 connecting blocks.	10	
	288-Pair (72-Po	ort) Category 6 Punchdown Base – with Legs		
N Mark	GPBW72-X	Positions and holds UTP wire for termination with Category 6 connecting blocks, includes mounting legs.	10	

Termination tool available on page B.83.

For rack mount applications see page B.85.

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 components. Can be clearly identified with label holders and recommended labels on page B.80.

GP6™ PLUS Standard Density Tower Kit

- · Ideal for use in cross-connects, consolidation point, and wall mount applications
- Tower provides vertical feeder cable management
- · Supplied with tower, bases, 4-pair connecting blocks, label and label holders



Part Number	Part Description	Std. Pkg. Qty.
GPKT724Y	288-pair (72-port) Category 6 punchdown standard density GP6™ PLUS Tower Kit.	1

Termination tool available on page B.83.

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 components.

B.
Coppe
System
7

C. Fiber **Optic** Systems

Power over **Ethernet**

Std.

Pkg.

Qty.

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

> G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding


> N. Industria

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Component Labels for GP6[™] PLUS Category 6 Standard Density Bases and GP6[™] PLUS Standard Density Tower Kit



	Suggested Label Solutions for TIA/EIA-606-A Compliance					
Punchdown System Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
All GP Kits on pages C1.33 – C1.36	C788X050Y1J	C788X050Y1T	C788X050Y1C	T100X000VPC-BK‡		

For complete labeling solutions and product information, reference charts on pages O.1 – O.25. ‡For non-adhesive labeling solution, do not remove liner from label.

UL)

GP6™ PLUS Patch Connectors

- Patch into GP6™ PLUS Connecting Blocks
- Field terminable
- · Cable clamp on cover facilitates easier wiring
- IDCs provide reliable, gas-tight connections
- Strain relief reduces stress on cable

- · Contain two-piece, snap-together housing
- Polarized to prevent reverse installation to connector block
- Clear polycarbonate cover keeps conductors visible after termination
- Cover also provides proper wiring sequence



GPC5E1-XY



GPC5E2-XY

Part Number		Std. Pkg. Qty.	Ctn.
GPC5E1-XY	Terminates 1-pair 24 AWG solid or stranded cable.	10	100
GPC5E2-XY	Terminates 2-pair 24 AWG solid or stranded cable.	10	100

To ensure optimal performance, Panduit recommends use with other Panduit Category 6 components.

GP6™ PLUS Patch Cord Assemblies

- Exceed ANSI/TIA-568-C.2 Category 6 standard
- · Factory assembled patch cord assembly
- Ideal for use in cross-connects and consolidation point applications with GP6™ PLUS Connector Blocks



GPPC4IG*Y



GPPC4IG*AY and GPPC4IG*BY

Part Number	Part Description	Length (Ft.)	Std. Pkg. Qty.	
GPPC4IG3Y	One 4-pair GP6™ PLUS Connector on each end.	3	1	10
GPPC4IG5Y		5	1	10
GPPC4IG7Y		7	1	10
GPPC4IG9Y		9	1	10
GPPC4IG14Y		14	1	10
GPPC4IG20Y		20	1	10
GPPC4IG3AY	One 4-pair GP6™ PLUS Connector wired to a RJ45 Pan- Plug® T568A wiring scheme.	3	1	10
GPPC4IG5AY		5	1	10
GPPC4IG7AY		7	1	10
GPPC4IG9AY		9	1	10
GPPC4IG14AY		14	1	10
GPPC4IG20AY		20	1	10
GPPC4IG3BY	One 4-pair GP6™ PLUS Connector wired to a RJ45 Pan-	3	1	10
GPPC4IG5BY	Plug® T568B wiring scheme.	5	1	10
GPPC4IG7BY		7	1	10
GPPC4IG9BY		9	1	10
GPPC4IG14BY		14	1	10
GPPC4IG20BY		20	1	10

To ensure optimal performance, Panduit recommends use with other Panduit TX6™ PLUS components.

Cable Labels for GP6™ PLUS Patch Cord Assemblies



	Suggested Label Solutions for TIA/EIA-606-A Compliance				
Patch Cord Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label	
All GPPC4IG Parts	S100X125YAJ	S100X125VATY	S100X125VAC	T100X000CBC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

B.	
Copp	e
Syste	m

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

GP6™ 1 and 2-Pair Patch Cord Assemblies

• Factory assembled patch cord assembly

 Ideal for use in cross-connect applications with GP6™ PLUS Connector Blocks



GPPC1IG*Y



GPPC2IG*Y

Part Number	Part Description	Length (Ft.)	Std. Pkg. Qty.	
GPPC1IG3Y	One 1-pair GP6™ Connector on each end.	3	1	10
GPPC1IG5Y		5	1	10
GPPC1IG7Y		7	1	10
GPPC1IG9Y		9	1	10
GPPC1IG14Y		14	1	10
GPPC1IG20Y		20	1	10
GPPC2IG3Y	One 2-pair GP6™ Connector on each end.	3	1	10
GPPC2IG5Y		5	1	10
GPPC2IG7Y		7	1	10
GPPC2IG9Y		9	1	10
GPPC2IG14Y		14	1	10
GPPC2IG20Y		20	1	10

LCable Labels for GP6™ 1 and 2-Pair Patch Cord Assemblies



	Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Cord Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label		
All GPPC Parts	S100X125YAJ	S100X125VATY	S100X125VAC	T100X000CBC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.



P110JT-X

Jumper Troughs

- · Available with or without legs for a variety of mounting options
- Unique finger design maintains cable bend radius

• Provide optimum cable management when used with GP6™ PLUS and Pan-Punch® Bases



P11	0JTW-X

Part Number	Part Description	Std. Pkg. Qty.
P110JTW-X	Jumper trough with legs.	10
P110JT-X	Jumper trough.	10
P110JTR2Y	Two jumper troughs mounted to two rack space panel.	1

GP6™ PLUS Termination Tools and Accessories

- Terminate wires on both cable and cross-connect sides of GP6 $^{\text{\tiny{M}}}$ Blocks
- Reversible blade provides option of terminating without cutting wire



GPDTM



Part Number	Part Description	Std. Pkg. Qty.	
4-Pair Punch	down Tool		
GPDTM	Inserts and cuts off up to 4-pairs at a time, for use with GP6 $^{\scriptscriptstyle{\text{TM}}}$ PLUS System only.	1	10
4-Pair Replac	cement Head Assembly		
GPDTMH	Replacement head assembly for GP6™ PLUS 4-Pair Punchdown Tool.	1	10
4-Pair Replac	cement Blade		
GPDTMB	Replacement blade for GP6™ PLUS 4-Pair Punchdown Tool.	1	10
Single Wire I	Punchdown Tool		
GPST	Inserts and cuts off one wire at a time, for use with $\text{GP6}^{\text{\tiny TM}}$ PLUS System only.	1	_
Single Wire I	Replacement Blade		
GPSTB	Replacement blade for GP6™ PLUS Single Wire Punchdown Tool.	1	_

Copper Systems

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. **Physical** Infrastructure Managemen

J. Overhead & Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> 0. Index

Pan-Punch® 110 Category 5e System Kits

- Exceed ANSI/TIA-568-C.2 Category 5e standard
- Field terminable
- · Ideal for use in cross-connects and consolidation point applications
- Provide pre-packaged components necessary for termination
- Include required quantity of bases and connecting blocks, label holders and labels

C+4 C+4

• Available in 100 or 300-pair bases with 3, 4, or 5-pair connecting blocks





Part Number	Part Description	Pkg. Qty.	Ctn.
100-Pair Termina	ation Kits		
P110KB1004Y	Field terminated. Includes a base, 4-pair connector kit with five 4-pair connectors and one 5-pair connector per row of 25 pairs, two label holders, and two white designation labels.	1	10
P110KB1005Y	Field terminated. Includes a base, 5-pair connector kit with five 5-pair connectors per row of 25 pairs, two label holders, and two white designation labels.	1	10

300-Pair Termination Kits					
P110KB3004Y	Field terminated. Includes a base, 4-pair connector kit with five 4-pair connectors and one 5-pair connector per row of 25 pairs, six label holders, and six white designation labels.	1	10		
P110KB3005Y	Field terminated. Includes a base, 5-pair connector kit with five 5-pair connectors per row of 25 pairs, six label holders, and six white designation labels.	1	10		

It is common practice to completely fill each 25-pair wire strip with connecting blocks. Each kit contains the adequate number of connecting blocks to do so. Example: P110KB1004 includes five 4-pair and one 5-pair connecting block per 25-pair wiring strip for a total of twenty 4-pair and four 5-pair connecting blocks as well as two label holders and two white designation labels.

Termination tool available on page B.91.

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

- E - E								
0:0	0.0	Component Quantity per Pan-Punch® 110 Category 5e Kits						
	201 201 201 201 201 201 201 201 201 201	Ва	ses	С	onnecting Bloc	ks	Label Holders	Labels
	Part Number	P110BW300	P110BW100	P110CB3	P110CB4	P110CB5	P110LH	DSL110
	P110KB1004Y	_	1	_	20	4	2	2
	P110KB1005Y	_	1	_	_	20	2	2
	P110KB3004Y	1	_	_	60	12	6	6
	D110KB200EV	1				60	6	6

J.

Cable Management Accessories

> Q. Index

19" Punchdown Rack Mount Panels

· Accept punchdown bases for rack mount applications



P110B100R2BY



^One rack space = 1.75" (44.45mm). Includes mounting screws.

Part Number

P110B100R2BY

P110B100R4BY

P110B100R4BY

Pan-Punch® Category 5e 19" Rack Mount Panels

- Exceed ANSI/TIA-568-C.2 Category 5e standard
- Ideal for use in cross-connects and consolidation point applications
- Mount to standard TIA/EIA 19" racks

 Exclusive deeper channel to facilitate TIA/EIA Category 5e
cabling installations

No. of

Rack

Spaces^

2

Std. Std.

Pkg. Ctn.

Qty.

10

10

Qty.

1



P110B100R2Y



P110B100R4WJY

Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	Ctn.
P110B100R2Y	Two 100-pair bases premounted to panel.	2	1	10
P110B100R4WJY	Two 100-pair bases with jumper troughs premounted to panel.	4	1	10

Part Description

Panel accepts up to 2 RU of punchdown bases.

Panel accepts up to 4 RU of punchdown bases.

^One rack space = 1.75" (44.45mm).

Includes mounting screws.

Termination tool available on page B.91.

For connecting blocks see page B.88.

Can be clearly identified with label holders and recommended labels shown on page B.84.

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

> G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Pan-Punch® Category 5e 19" Rack Mount Panel Kits

- Exceed ANSI/TIA-568-C.2 Category 5e standard
- Field terminable
- Ideal for use in cross-connects and consolidation point applications
- Include required quantity of bases and connecting blocks, label holders, and labels
- Available with 4 or 5-pair connecting blocks



P110B1004R2Y



P110B1004R4WJY

Part Number	Part Description	No. of Rack Spaces^	Std. Pkg. Qty.	
Rack Mount Pane	el Kit with Bases and Connecting Blocks			
P110B1004R2Y	Two 100-pair bases premounted to panel. 4-pair connector kit included with five 4-pair connectors and one 5-pair connector per row of 25 pairs.	2	1	10
P110B1005R2Y	Two 100-pair bases premounted to panel. 5-pair connector kit included with five 5-pair connectors per row of 25 pairs.	2	1	10
Rack Mount Pane	el Kit with Bases, Connecting Blocks, and Jum	per Trough	s	
P110B1004R4WJY	Two 100-pair bases and jumper troughs premounted to 19" rack mount panel. 4-pair connector kit included with five 4-pair connectors and one 5-pair connector per row of 25 pairs.	4	1	10

Two 100-pair bases and jumper troughs premounted

to 19" rack mount panel with 5-pair connector kit

included with five 5-pair connectors per row of 25

^One rack space = 1.75" (44.45mm).

Includes mounting screws.

P110B1005R4WJY

Termination tool available on page B.91.

Can be clearly identified with labels found on page B.84.



Pan-Punch® 110 Category 5e Tower System

- Provides a complete cross-connect system
- Designed for wall mount applications
- Available in 300 and 900 pair configurations with 3, 4, or 5-pair connecting blocks
- Supplied jumper troughs provide horizontal cable management
- Tower provides vertical feeder cable management



P110KT300Y

Part Number	Part Description	Pkg. Qty.	
Pan-Punch® 300)-Pair Tower Kits		
P110KT3004Y	Convenient packaging includes all of the components required to		
P110KT3005Y	completely wire a 110 base.		
Pan-Punch® 900)-Pair Tower Kits	·	
P110KT9004Y Convenient packaging includes all of the components required to		1	
P110KT9005Y	completely wire a 110 base.	1	
Pan-Punch® Tov	vers	<u> </u>	
P110T300Y	300-pair tower. Components sold separately.	1	
P110T900Y	900-pair tower. Components sold separately.	1	

Each tower system contains adequate connecting blocks to complete each 25-pair wiring strip. Example: P110KT3004Y includes five 4-pair and one 5-pair connecting block per 25-pair wiring strip for a total of sixty 4-pair and twelve 5-pair connecting blocks.

 $\mathsf{GP6}^{^{\bowtie}}$ PLUS system can be installed on individual towers, not recommended for use with $\mathsf{GP6}^{^{\bowtie}}$ PLUS high density bases.

Termination tool available on page B.91.

Cable requirement: terminates most 22 – 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

10

Std.

Component Labels for Pan-Punch® 110 Category 5e Tower Systems



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Punchdown System Part Number	Laser/Ink Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label	
All Pan-Punch® Tower Kits	C750X050Y1J	C750X050Y1T	C750X050Y1C	T050X000VPC-BK‡	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25. ‡For non-adhesive labeling solution, do not remove liner from label.

Vertical Cable Managers for Tower Systems

- Finger design allows for easy changes
- Can be mounted between towers
- Compatible with GP6™ PLUS or 110 Tower Systems
- Designed for wall mount or 19" rack mount applications
- · Facilitates vertical cable management
- Rugged all metal construction



Part Number	Part Description	Color	Std. Pkg. Qty.
Vertical Cable	Manager for use with 300-Pair Tower System		
P110VCM300	Mounts adjacent to 300-pair tower system.	Black	1
Vertical Cable	Manager for use with Backboard Mounting		
P110VCM	Mounts to plywood backboard and adjacent to bases and jumper troughs. White metal backboard and large D-rings, designed for wall mount vertical or horizontal cable management.	White	1
Vertical Cable	Manager for use with 900-Pair Tower System		
P110VCM900	Mounts adjacent to 900-pair tower system.	Black	1

110 Punchdown Label Holder

• Use with adhesive or non-adhesive designation labels



Part Numbe	r Part Description	Pkg.	Std. Ctn. Qty.
P110LH	Label holder snaps into 110 and GP6™ Bases.	6	60

Copper Systems

C. Fiber Optic 0 Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

Ι. **Physical** Infrastructure Managemen

J. Overhead & Underfloor Routing

Surface Raceway

Cabinets, Racks & Cable Management

Grounding & **Bonding**


Industrial

0. Labeling & Identification

Cable Managemen Accessories

> 0. Index

Component Labels for 110 Punchdown Designation Label Holders



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Punchdown Holder Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar™ LS9 Hand-Held Printer Label	
P110LH	C750X050Y1J	C750X050Y1T	C750X050Y1C	T050X000VPC-BK‡	

For complete labeling solutions and product information, reference charts on pages O.1 - O.25. ‡For non-adhesive labeling solution, do not remove liner from label.

19" Rack Mount Bracket Kits

· Used to attach tower systems and vertical cable managers to 19" racks

- Use two towers side-by-side or a tower and a vertical wire manager side-by-side
- · Include brackets and mounting screws



Part Number	Part Description	Std. Pkg. Qty.
P110TB300Y	Kit for 300-pair tower or vertical wire management.	1
P110TB900Y	Kit for 900-pair tower or vertical wire management.	1

Pan-Punch® 110 Category 5e Connecting Blocks

- Exceeds ANSI/TIA-568-C.2 Category 5e standard
- Available in 3, 4, or 5-pair connection blocks
- Dual IDC terminates UTP cable on 110 base and UTP cable or 110 patch cords for cross-connecting
- · Highly visible color-coded wiring slots ease wiring
- Can be used with single or multiple punchdown tools
- Can be utilized with discrete wires or Pan-Punch® Patch Cord Connector
- Constructed of UL 94V-0 high impact polycarbonate material
- Patented single piece robust construction



P110CB3-*Y

P110CB4-*Y



P110CB5-*Y

Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
3-Pair 110 Con	necting Blocks		
P110CB3-XY	3-pair connecting block.	10	1000
P110CB3-CY		100	1000
4-Pair 110 Con	necting Blocks		
P110CB4-XY	4-pair connecting block.	10	1000
P110CB4-CY		100	1000
5-Pair 110 Con	necting Blocks		
P110CB5-XY	5-pair connecting block.	10	1000
P110CB5-CY		100	1000

Termination tool available on page B.91.

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.



Pan-Punch® 110 Category 5e Bases

- Exclusive deeper channel to facilitate TIA/EIA-568-C.2 Category 5e cabling installations
- Ideal for use in cross-connects and consolidation point applications
- · Available with or without legs for various mounting options
- · Sturdy one-piece design
- · Highly visible color-coded wiring strip





P110BW100-X

P110BW300-X





P110B100-X

P110B300-X

Part Number	Part Description	Pkg. Qty.
100-Pair Base -	- with Legs	
P110BW100-X	Positions and holds UTP cable for termination with Pan-Punch® 110 Connecting Blocks. Legs allow cables to be routed behind bases.	10
100-Pair Base		
P110B100-X	Positions and holds UTP cable for termination with Pan-Punch® 110 Connecting Blocks. For frame or rack mount wiring behind bases.	10
300-Pair Base	- with Legs	
P110BW300-X	Positions and holds UTP cable for termination with Pan-Punch® 110 Connecting Blocks. Legs allow cables to be routed behind bases.	10
300-Pair Base		
P110B300-X	Positions and holds UTP cable for termination with Pan-Punch® 110 Connecting Blocks. For frame or rack mount wiring behind bases.	10

Cable requirement: terminates most 22 - 26 AWG solid or stranded IWC wire with a 0.050" (1.27mm) max o.d., either PVC or plenum rated.

Can be clearly identified with label holders and recommended labels shown on page B.84.



Pan-Punch® 110 Patch Connectors

- · Contain two-piece, snap together housing
- Field terminable
- · Cable clamp on cover provides easier wiring
- IDCs provide reliable gas-tight connections
- · Strain relief reduces stress on cable
- Polarized to prevent reverse installation to connector block
- Clear polycarbonate cover keeps conductors visible after termination





P110PC1-XY

P110PC2-XY





P110PC3-XY

P110PC4-XY

Part Number	Part Description	Pkg.	Ctn. Qty.
P110PC1-XY	Terminates 1-pair, 24 AWG solid or stranded cable.	10	100
P110PC2-XY	Terminates 2-pairs, 24 AWG solid or stranded cable.	10	100
P110PC3-XY	Terminates 3-pairs, 24 AWG solid or stranded cable.	10	100
P110PC4-XY	Terminates 4-pairs, 24 AWG solid or stranded cable.	10	100

Copper Systems

C. Fiber Optic 0 Systems

Power over **Ethernet**

04.4

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

i

Pan-Punch® 110 Patch Cord Assemblies

Factory assembled patch cord assembly

 Ideal for use in cross-connect applications with Pan-Punch® 110 connecting blocks



P110PC*IG*Y



P110PC*IG*AY

Part Number	Part Description	Length (Ft.)‡	Std. Pkg. Qty.	Std. Ctn. Qty.
P110PC1IG2Y	1-pair 110 connector on each end. Meets Category 3	2	1	10
P110PC1IG4Y	performance requirements.	4	1	10
P110PC1IG5Y		5	1	10
P110PC1IG6Y		6	1	10
P110PC2IG2Y	2-pair 110 connector on each end. Meets Category 5	2	1	10
P110PC2IG4Y	performance requirements.	4	1	10
P110PC2IG5Y		5	1	10
P110PC2IG6Y		6	1	10
P110PC4IG2Y	4-pair 110 connector on each end. Meets Category 5e	2	1	10
P110PC4IG4Y	performance requirements.	4	1	10
P110PC4IG5Y		5	1	10
P110PC4IG6Y		6	1	10
P110PC4IG2AY	4-pair 110 connector to Pan-Plug® RJ45 modular plug –	2	1	10
P110PC4IG4AY	T568A wired. Meets Category 5e performance requirements.	4	1	10
P110PC4IG5AY	requirements.	5	1	10
P110PC4IG6AY		6	1	10
P110PC4IG2BY	4-pair 110 connector to Pan-Plug® RJ45 modular plug –	2	1	10
P110PC4IG4BY	T568B wired. Meets Category 5e performance requirements.	4	1	10
P110PC4IG5BY	requirements.	5	1	10
P110PC4IG6BY		6	1	10

 \ddagger For lengths 7, 8, 9, 12, or 15 feet, change the length designation in the part number to the desired length.

Cable Labels for Pan-Punch® 110 Patch Cord Assemblies



Suggested Label Solutions for TIA/EIA-606-A Compliance					
Patch Cord Assemblies Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher™ LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label	
P110PC1	S100X125YAJ	S100X125VATY	S100X125VAC	T100X000CBC-BK	
P110PC2&4	S100X150YAJ	S100X150VATY	S100X150VAC	T100X000CBC-BK	

For complete labeling solutions and product information, reference charts on pages O.1 – O.25.

Jumper Troughs

- Available with or without legs for a variety of mounting options
- Unique finger design maintains cable bend radius

• Provide optimum cable management when used with GP6™ PLUS and Pan-Punch® Bases



P110JT-X

Part Number	Part Description	Std. Pkg. Qty.
P110JTW-X	Jumper trough with legs.	10
P110JT-X	Jumper trough.	10
P110JTR2Y	Two jumper troughs mounted to two rack space panel.	1

Pan-Punch® Punchdown Tools and Accessories

- Terminate wires on both cable and cross-connect sides of 110 connecting blocks
- Single pair punchdown tool terminates on the back of the DP6A[™] 10Gig[™], DP6[™] PLUS, and DP5e[™] Patch Panels
- Reversible blade provides option of terminating without cutting wire
- 5-pair punchdown tool seats 3, 4, or 5-pair connecting blocks onto 110 base





PDT110

Part Number	Part Description	Std. Pkg. Qty.	
5-Pair Punch	down Tool		
PDT110M	5-pair punchdown tool, can terminate up to 5 pairs at a time.	1	10
Replacemen	t Head		
PDH110M	Replacement head assembly for 5-pair punchdown tool.	1	10
Replacemen	t Blade Assembly		
PDB110M	Replacement blade for 5-pair punchdown tool.	1	10
Single Puncl	hdown Tool		
PDT110	Punchdown tool and blade for 110 style IDCs. Terminates and cuts UTP cable in one operation.	1	_
Replacemen	t Blade		
PDTH110	Replacement blade for single pair punchdown tool.	1	_

Copper Systems

C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

RJ45 Jack Blockout Device

- Blocks unauthorized access to jacks and potentially harmful foreign objects, saving time and money associated with data security breaches, network downtime, repair and hardware replacement
- Compatible with most RJ45 jacks to accommodate a variety of applications and does not interfere with jack contacts
- Can be installed/removed without interfering with adjacent jacks or hardware
- May only be released with the special removal tool, ensuring the safety and security of your network infrastructure



PSL-DCJB



Part Number	Part Description	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
PSL-DCJB*	Package of ten RJ45 jack blockout devices and one removal tool.	Red	1	20
PSL-DCJB-BL*	Package of ten RJ45 jack blockout devices and one removal tool.	Black	1	20
PSL-DCJB-BU*	Package of ten RJ45 jack blockout devices and one removal tool.	Blue	1	20
PSL-DCJB-YL*	Package of ten RJ45 jack blockout devices and one removal tool.	Yellow	1	20
PSL-DCJB-IW*	Package of ten RJ45 jack blockout devices and one removal tool.	International White	1	20
PSL-DCJB-GR*	Package of ten RJ45 jack blockout devices and one removal tool.	Green	1	20
PSL-DCJB-OR*	Package of ten RJ45 jack blockout devices and one removal tool.	Orange	1	20
PSL-DCJB-IG*	Package of ten RJ45 jack blockout devices and one removal tool.	International Gray	1	20
PSL-DCJB-VL*	Package of ten RJ45 jack blockout devices and one removal tool.	Violet	1	20

^{*}Available in bulk packages of 100 devices and five removal tools. To order bulk package add -C to the suffix of part number.

USB Blockout Device

NEW!

- Blockout devices block unauthorized access to USB ports, to provide additional security from viruses being loaded and illicit data being removed through the USB port
- Type A blockouts compatible with USB 2.0 and USB 3.0 Type "A" ports; Type B blockouts compatible with USB 2.0 Type "B" ports
- · Can be installed without interfering with adjacent USB ports
- May only be released with the special removal tool, ensuring the safety and security of your network infrastructure; Permanent blockouts are not releasable



PSL-DCJBUSBA



PSL-DCJBPERM-USBA



PSL-DCJBUSBB



PSL-DCJBPERM-USBB

Part Number	Part Description	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
USB Type A Block	couts			
PSL-USBA*	Package of five USB Type 'A' blockout devices and one removal tool.	Red	1	20
PSL-PERM-USBA	Package of ten Permanent USB Type 'A' blockout devices.	Red	1	20
USB Type B Block	couts			
PSL-USBB	Package of ten USB Type 'B' blockout devices and one removal tool.	Red	1	20
PSL-PERM-USBB	Package of ten Permanent USB Type 'B' blockout devices.	Red	1	20

^{*}Available in bulk packages of 50 devices and five removal tools. To order bulk package add -L to the suffix of part number.



C. Fiber **Optic** Systems

Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

B. Copper Systems

C. Fiber Optic Systems

D. Power over Ethernet

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

K. Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

RJ45 Plug Lock-In Device

- Tamper-resistant design blocks unauthorized removal of cable, VoIP phone, other networking equipment, or critical connection
- Compatible with UTP and shielded Category 6A, 6, and UTP Category 5e patch cords
- Deters unauthorized users from moving or stealing VoIP phones helping to maintain E911 service
- Compact design does not interfere with adjacent jack modules, even in high-density applications
- Installation/removal tool allows plug to be locked into or released from jack module for enhanced physical security
- Locking mechanism is white for flush mount and clear for recessed devices



PPSL-DCPLRX-BL





Part Number	Part Description	Color	Std. Pkg. Qty.	Std. Ctn. Qty.
Flush - Compatibl	e With Flush Mounted Jack Modules			
PSL-DCPLX*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	Red	1	20
PSL-DCPLX-BL*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	Black	1	20
PSL-DCPLX-BU*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	Blue	1	20
PSL-DCPLX-YL*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	Yellow	1	20
PSL-DCPLX-IW*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	International White	1	20
PSL-DCPLX-GR*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	Green	1	20
PSL-DCPLX-OR*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	Orange	1	20
PSL-DCPLX-IG*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	International Gray	1	20
PSL-DCPLX-VL*	Package of ten RJ45 plug lock-in devices and one installation/removal tool.	Violet	1	20
Recessed - Comp	atible With Recessed Jack Modules			

necessed - comp	alible Willi Necesseu oack Modules			
PSL-DCPLRX*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	Red	1	20
PSL-DCPLRX-BL*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	Black	1	20
PSL-DCPLRX-BU*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	Blue	1	20
PSL-DCPLRX-YL*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	Yellow	1	20
PSL-DCPLRX-IW*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	International White	1	20
PSL-DCPLRX-GR*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	Green	1	20
PSL-DCPLRX-OR*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	Orange	1	20
PSL-DCPLRX-IG*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	International Gray	1	20
PSL-DCPLRX-VL*	Package of ten recessed RJ45 plug lock-in devices and one installation/removal tool.	Violet	1	20

^{*}Available in bulk packages of 100 devices and five installation/removal tools. To order bulk package add -C to the suffix of part number. The RJ45 plug lock-in device may not be compatible with all jacks, overmolded cables, or PanView™ Cables.

System **Overview**

Self-Laminating Cable Marker Holders for Large Cables or Cable Bundles

- Durable tag to mark a wide range of cables and cable bundles
- Can be used with printer generated labels or hand-written
- · Attaches easily with Panduit intermediate or standard cross-section nylon cable ties or Panduit® Tak-Ty® Hook & Loop Cable Ties
- · Clear overlaminate protects legend
- Can be applied as a wrap-around marker (parallel to cable) or flag marker (45° or 90° to cable)
- · Available in white, yellow, orange, and gray
- Large label area provides ample room for complex labeling scheme



SLCT-WH



SLCT-OR

		Width Height		Width		Height		Std. Pkg.	Std. Ctn.
Part Number	Part Description	ln.	mm	ln.	mm	Qty.	Qty.		
SLCT-WH	White, self-laminating cable marker holder, 25 tags/pkg.	3.00	76.2	1.31	33.3	1	4		
SLCT-OR	Orange, self-laminating cable marker holder, 25 tags/pkg.	3.00	76.2	1.31	33.3	1	4		
SLCT-YL	Yellow, self-laminating cable marker holder, 25 tags/pkg.	3.00	76.2	1.31	33.3	1	4		
SLCT-IG	Gray, self-laminating cable marker holder, 25 tags/pkg.	3.00	76.2	1.31	33.3	1	4		

Attach with Panduit Intermediate or Standard cross section cable ties.

Component Labels for Self-Laminating Cable Markers or Large Cables or Cable Bundles



Suggested Label Solutions for TIA/EIA-606-A Compliance						
Cable Marker Holder Part Number	Laser/Ink Jet Desktop Printer Label	TDP43ME Thermal Transfer Desktop Printer Label	PanTher [™] LS8E Hand-Held Printer Label	Cougar [™] LS9 Hand-Held Printer Label		
All SLCT Parts	C200X100FJJ	C200X100YPT	C200X100FJC	T100X000VPC-BK		

For complete labeling solutions and product information, reference charts on pages O.1 - O.25.

	В	
-60	p	pe
Sy	st	em

C. Fiber **Optic** Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

١. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

Labeling & Identification

Cable Management Accessories

В. Copper Systems

C. Fiber **Optic** Systems

D. Power over Ethernet

E. Zone Cabling

Wireless

G. Outlets

F.

Media Distribution

I. Physical Infrastructure Management

J. Overhead 8 Underfloor Routing

> Surface Raceway

Cabinets, Racks & Cable Management

M. Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

> Q. Index

Thermal Transfer Marker Plates

- Non-adhesive marker plates offer crisp, clear legends with superior legibility
- · Available in a variety of colors and sizes • Use with Panduit RMR4BL resin thermal transfer ribbon
- Attachable in a horizontal or vertical orientation



		Wi	dth	Hei	ght		n Area dth	Labels Per	Std. Pkg.	Std. Ctn.
Part Number	Part Description	ln.	mm	ln.	mm	ln.	mm	Roll	Qty.	Qty.
M300X100Y6T	Yellow, thermal transfer marker plate.	3.00	76.2	1.00	25.4	1.80	45.7	500	1	4
M300X100Y7T	White, thermal transfer marker plate.	3.00	76.2	1.00	25.4	1.80	45.7	500	1	4
M300X050Y6T	Yellow, thermal transfer marker plate.	3.00	76.2	0.50	12.7	2.07	52.6	500	1	4
M300X050Y7T	White, thermal transfer marker plate.	3.00	76.2	0.50	12.7	2.07	52.6	500	1	4
M200X100Y6T	Yellow, thermal transfer marker plate.	2.00	50.8	1.00	25.4	0.80	20.3	500	1	4
M200X100Y7T	White, thermal transfer marker plate.	2.00	50.8	1.00	25.4	0.80	20.3	500	1	4
M200X050Y6T	Yellow, thermal transfer marker plate.	2.00	50.8	0.50	12.7	1.07	27.3	500	1	4
M200X050Y7T	White, thermal transfer marker plate.	2.00	50.8	0.50	12.7	1.07	27.3	500	1	4

Patch Cord Color Bands

- Removable band snaps on and off individual cables allowing the same patch cord to be used for different applications
- Can be installed next to each other allowing multiple color bands to be used on one cable, offering endless color coding options
- Internal grooves secure color bands in place on cable providing easy identification at the connection
- · Available in 10 standard colors that match Panduit connectivity providing an aesthetically pleasing solution
- · Compatible with all Panduit patch cords, existing and new installations can be color-coded as networks change



Part Number	Part Description	Color	Std. Pkg. Qty.
PCBANDBL-Q	Snaps onto individual patch cable for additional color-coding.	Black	25
PCBANDBU-Q		Blue	25
PCBANDWH-Q		White	25
PCBANDEI-Q		Electric Ivory	25
PCBANDIG-Q		International Gray	25
PCBANDOR-Q		Orange	25
PCBANDRD-Q		Red	25
PCBANDGR-Q		Green	25
PCBANDYL-Q		Yellow	25
PCBANDVL-Q		Violet	25

Patch cords available on pages B.18, B.25, B.34, B.46, B.50.

Cable Prep Tools

- Copper Wire Snipping Tool (CWST) cuts conductors flush for improved performance
- Adjustable Cable Jacket Stripping Tool (CJAST) strips outer jacket of 4-pair UTP and shielded copper cable



Part Number	Part Description	Std. Pkg. Qty.
CWST	Copper conductor snipping tool.	1
CJAST	Cable jacket stripping tool.	1
CJASTB	Replacement blade for cable stripping tool CJAST.	1

CWST



CJAST

Module Termination Tools and Accessories

- TGJT termination tool easily terminates all TG style jack modules, reducing installation time by 25%
- EGJT tool assists in terminating all enhanced Giga-TX™ Style Jack Modules by ensuring conductors are fully terminated by utilizing smooth forward motion without impact on critical internal components for maximum reliability
- CGJT termination tool terminates all Mini-Com® Mini-Jack™ Jack Modules
- CJT-X tool assists in terminating all Mini-Com® Mini-Jack™ Jack Modules by ensuring conductors are fully terminated
- Punchdown base (AVPDB) available for terminating S-video and RCA punchdown modules
- Dust cap keeps out dust and debris from RJ45 style jack modules while not in use





EGJT



AVPDB



CGJT

CJT-X

MDC-C

Part Number	Part Description	Std. Pkg. Qty.	Std. Ctn. Qty.
TGJT	TG termination tool easily terminates all TG style jack modules by cutting conductors flush and assembling wire cap and jack. Ideal for high volume installations.	1	_
EGJT	Terminates enhanced Giga-TX™ TG Style Jack Modules.	1	50
CGJT	Terminates Giga-TX™ TP Style Jack Modules.	1	50
CJT-X	Terminates Mini-Com® Mini-Jack™ Jack Modules.	10	50
AVPDB	Audio/video punchdown base used to assist in terminating Mini-Com® S-Video and RCA Punchdown Modules.	1	50
MDC-C	Jack module dust cap. Compatible with all RJ45 Mini-Com® Jack Modules.	100	1000

Patch cord and connector removal tools for high-density applications are available on page B.98.

Copper Systems

C. Fiber Optic 0 Systems

Power over **Ethernet**

E. Zone Cabling

F. Wireless

G. **Outlets**

Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> Surface Raceway

0.1

Cabinets, Racks & Cable Management

Grounding & Bonding

Industrial

0. Labeling & Identification

Cable Management Accessories

E. Zone Cabling

F. Wireless

G. Outlets

H. Media Distribution

I. Physical Infrastructure Management

J. Overhead & Underfloor Routing

> K. Surface Raceway

L. Cabinets, Racks & Cable Management

M. Grounding & Bonding

> N. Industrial

0. Labeling & Identification

P. Cable Management Accessories

> Q. Index

Patch Cord Removal Tool

- Tool arms allow the installer to pass over cabling which interferes with accessibility
- Compatible with copper and fiber patch cords

• Optional flashlight kit (KPCRT1-FL) attaches to top of tool



PCRT1

Part Number	Part Description	Std. Pkg. Qty.
PCRT1	Easily removes copper and fiber patch cords in dense rack installations.	1
KPCRT1-FL	Flashlight kit for patch cord removal tool (PCRT1).	1



KPCRT1-FL

Modular Plug Termination Tools

 WPT-8 arranges all eight conductors in the proper sequence and provides proper gauge length for trimming conductors for MP588

MPT5-8AS required for modular plug termination



WPT-8



MPT5-8AS

Part Number	Part Description	Std. Pkg. Qty.	
Wire Prep Tool			
WPT-8	Crimp tool for TX6™ PLUS and Pan-Plug™ Modular Plugs.	1	10

Modular Plug I	nstallation Tool		
MPT5-8AS	Crimp tool for TX6™ PLUS and Pan-Plug® Modular Plugs.	1	_