




CIRCUIT DIAGRAM



| NO | PART NAME | Q'TY | MATERIAL | RAMARKS |
|----|-----------|------|-------------------|---------|
| ① | CASE | 1 | NYLON66G30 | BLACK |
| ② | STEM | 1 | PBT | BLUE |
| ③ | BRACKET | 1 | SPTe | Sn 3μ |
| ④ | TERMINAL | 1 | C2680R-EH | Ag 0.5μ |
| ⑤ | C/PLATE | 1 | C5210R-EH Ag clad | 0.5μ |

NOTE

1. OPERATING FORCE : 160 ± 50 gf
2. TRAVEL : 0.25 +0.2/-0.1 mm
3. CONTACT RESISTANCE : 100mΩ Max
4. GENERAL TOLERANCE : ±0.3

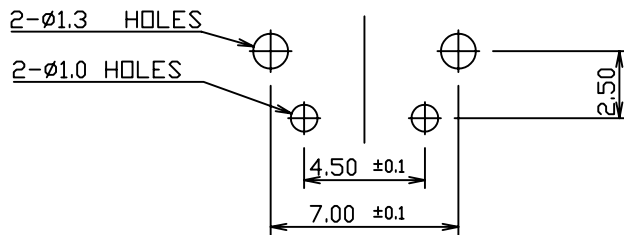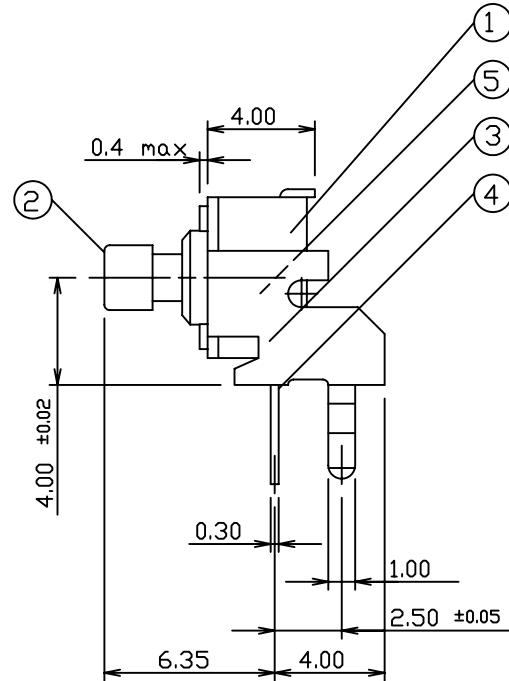

P.C.B DIMENSION

| No. | PART NAME | Q'TY | MATERIAL | SIZE | TREAT. | REMARKS |
|-----|-----------|------|----------------------|----------|----------|------------------------|
| △ | | | 3RD ANGLE PROJECTION | UNIT m/m | SCALE 1 | MODEL 1102HT |
| △ | | | APPROVED | CHECKED | DESIGNED | DWG.NAME ASS'Y DIAGRAM |
| △ | | | | | | DWG.NO. |
| △ | | | | | | |
| NO. | DATE | NOTE | SIGN | | | |