

Data Sheet

Customer:

Product: Carbon Film Resistor — CFS Series

Sizes.: 0204/0207/0309

Issued Date: 24-Apr-15

Edition: REV.A3



VIKING TECH CORPORATION

光韻科技股份有限公司

No.70, Kuanfu N. Rad.,
Hsin Chu Industrial Park,
Hukou Hsiang, Hsin Chu Hsien,
303, Taiwan

TEL:886-3-5972931

FAX:886-3-5972935•886-3-5973494

E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH

光韻科技股份有限公司高雄分公司

No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999

FAX:886-7-8228229

E-mail:sales@viking.com.tw

WUXI TMTEC CO., LTD.

無錫泰銘電子有限公司

No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028

TEL:86-510-85203339

FAX:86-510-85203667•86-510-85203977

E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
24-Apr-15	24-Apr-15	24-Apr-15	24-Apr-15	
<i>Kris Chen</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

Carbon Film Resistor




■ Features

- SMD style carbon resistor
- Free direction for mounting due to cylindrical design
- High solder ability due to specially plated electrodes
- Electrodes strength is higher than flat chip resistors
- Lower current noise than thick film flat chip resistors
- Suitable for reflow, flow and iron soldering

■ Applications

- Automotive
- Telecommunication
- Medical Equipment
- Consumer Product

■ Construction

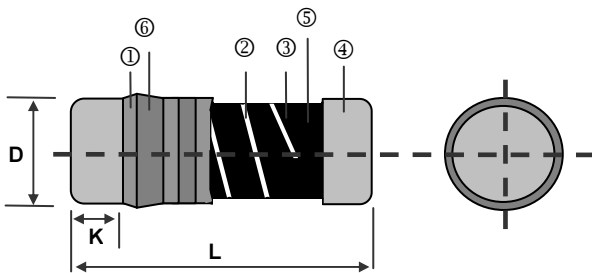


① Insulation Coating	④ Electrode Cap
② Trimming Line	⑤ Resistor Layer
③ Ceramic Rod	⑥ Marking

■ Dimensions

Unit: mm

Type	L	ΦD	K min.	Wight (g) (1000pcs)	Packaging	
					180mm/7"	330mm/13"
CFS0204	3.50±0.2	1.40±0.15	0.5	19	3000EA	—
CFS0207	5.90±0.2	2.20±0.20	0.5	81	2000EA	—
CFS0309	8.50±0.2	3.20±0.20	0.5	95	—	2500EA

■ Derating Curve

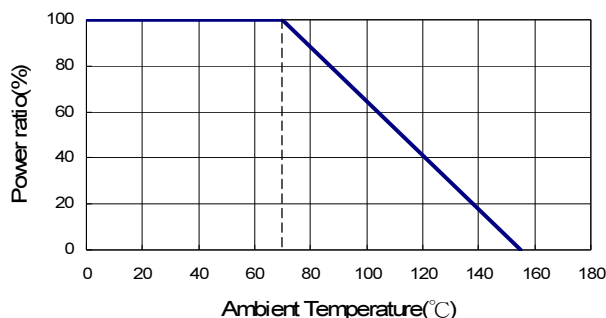

Carbon Film Resistor

Part Numbering

CFS	0204	G	T	-	V	1000
Product Type	Dimensions (L×ΦD) 0204: 3.5x1.4 0207: 5.9x2.2 0309: 8.5x3.2	Resistance Tolerance G: ±2% J: ±5%	Packaging Code T: Taping Reel B: Bulk	TCR (PPM/°C) -: No specified	Power Rating S: 2W T: 1W U: 1/2W V: 1/4W	Resistance 0010: 1Ω 1R20: 1.2Ω 1000: 100Ω 2201: 2200Ω 1001: 1KΩ 1004: 1MΩ

Standard Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range	
					±2%	±5%
0204	1/4W	-55 ~ +155°C	250V	500V	1Ω - 1MΩ	
0207	1/2W		300V	600V	1Ω - 1MΩ	
0309	1W		350V	700V	1Ω - 1MΩ	

High Power Rating Electrical Specifications

Item Type	Power Rating at 70°C	Operating Temp. Range	Max. Operating Voltage	Max. Overload Voltage	Resistance Range	
					±2%	±5%
0207	1W	-55 ~ +155°C	350V	700V	1Ω - 1MΩ	
0309	2W		350V	700V	1Ω - 1MΩ	

Operating Voltage= $\sqrt{P \cdot R}$ or Max. operating voltage listed above, whichever is lower.
 Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$ or Max. overload voltage listed above, whichever is lower.

Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	1Ω - 100KΩ: ±350ppm 101KΩ - 500KΩ: ±700ppm 501KΩ - 1MΩ: ±1000ppm	JIS-C-5201-1 4.8 -55°C~+125°C, 25°C is the reference temperature
Short Time Overload	$\Delta R \pm 1\%$	JIS-C-5201-1 5.5 RCWV*2.5 or Max. overload voltage whichever is lower for 5 seconds
Endurance	$\Delta R \pm 3\%$	JIS-C-5201-1 7.10 70±2°C, RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Damp Heat with Load	$\Delta R \pm 5\%$	JIS-C-5201-1 7.9 40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Dry Heat	$\Delta R \pm 2\%$	JIS-C-5201-1 7.2 at +155°C for 1000 hrs
Solderability	95% min. coverage	JIS-C-5201-1 6.5 245±5°C for 3 seconds
Resistance to Soldering Heat	$\Delta R \pm 1\%$	JIS-C-5201-1 6.4 260±5°C for 10 seconds

RCWV(Rated continuous working voltage)= $\sqrt{P \cdot R}$ or Max. Operating voltage whichever is lower

Storage Temperature: 25±3°C; Humidity < 80%RH