

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 01/16/09		




TOLERANCE:

Abbr.	TOLERANCE						
	P=0.50	P=0.80	P=1.00	P=1.25	P=1.50	P=2.00	P=2.54
P	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
Pt	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
W	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
M	±0.050	±0.080	±0.080	±0.100	±0.125	±0.150	±0.250
Cw	±0.020	±0.030	±0.030	±0.030	±0.030	±0.040	±0.040
L	(15~100)±3	(101~300)±5	(301~600)±10	(601~1000)±15			

NOTES:

- Insulation material: PVC
Supporting Tape material: Polyester
Conductor material: Tin plated copper
- Product Number Code
DS1057-03 - X X X X X X X X X X

- Cable Style
- A: A type
- B: B type
- Cable Thickness
- 1: 0.12mm
- 2: 0.30mm
- 3: 0.57mm
- Total Length(Dim L)
- A: 110mm
- B: _____
- C: _____
- D: _____
- Supporting tape Length
- 5: 5.0mm
- 6: 6.0mm
- 8: 8.0mm
- 10: 10.0mm
- Supporting Tape color
- L: Blue
- Strip Length
- 3: 3.0mm
- 4: 4.0mm
- 5: 5.0mm
- 6: 6.0mm
- Insulation color
- W: White
- No.Of positions
- 02: 2pin
- ⋮
- 60: 60pin
- Conductor Size
- A: 0.05mmx0.3mm
- B: 0.05mmx0.5mm
- C: 0.05mmx0.7mm
- D: 0.10mmx0.5mm
- E: 0.10mmx0.7mm
- F: 0.10mmx0.8mm
- G: 0.10mmx1.27mm
- H: 0.035mmx0.65mm
- Pitch
- 1: 1.00
- 2: 2.00
- 3: 1.50
- 4: 2.54
- 5: 0.50
- 6: 1.25
- 8: 0.80

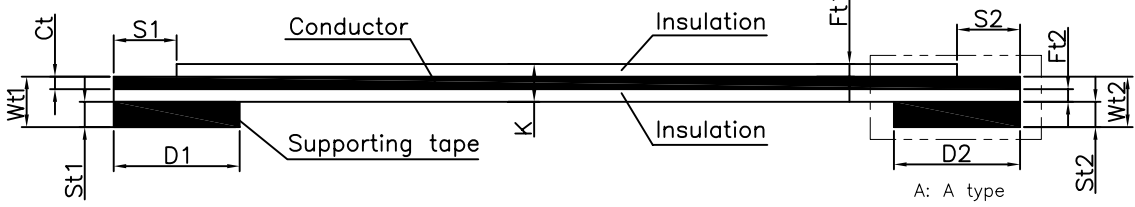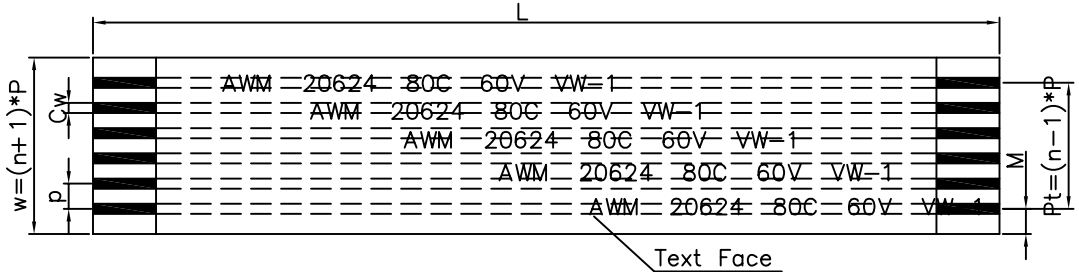


Ft1±0.005	0.043
Ft2±0.005	0.043

Pitch	No.Of positions	Conductor Size Ct*Cw (mm)	Strip Length S1=S2 (mm)	Supporting tape Length D1=D2 (mm)
p=0.50	06~60pin	0.05x0.3	3or4	6or8
p=0.80	06~40pin	0.05x0.5	4or5	8or10
p=1.00	03~50pin	0.035x0.65	4or5	8or10
		0.05x0.7		
		0.10x0.5		
p=1.25	03~36pin	0.10x0.7	4or5or6	10
		0.10x0.8		
p=1.50	02~30pin	0.10x0.5	4or5or6	10
p=2.00	02~30pin	0.10x0.5	3or4or5or6	5or6or8or10
p=2.54	02~18pin	0.10x0.7	4or5or6	10
		0.10x1.27		

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	UL 20624 FLEXIBLEFLAT CABIE
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1057-03

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1057-03-XXXXXXXXXX		


晨翔电子有限公司
CONNPLY CONNPLY ELECTRONIC CO. LTD