
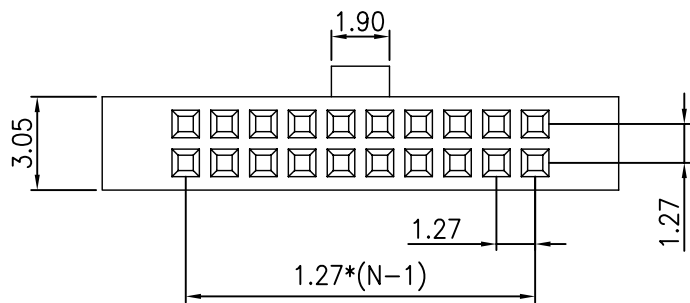



COVER

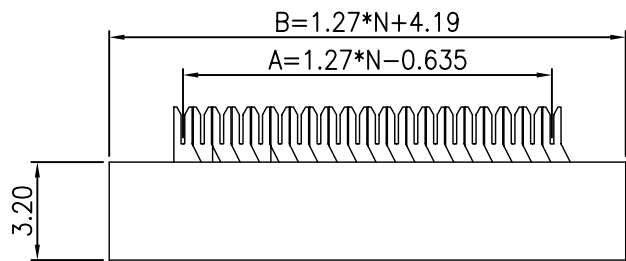

HOUSING

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		

NOTES:








- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE RANGE:-40°C~+105°C.
 - CONTACT RESISTANCE:20mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PACKING: PVC TRAY.
- PRODUCT NUMBER CODE:

DS1017-01- X X X X

- CONTACT PLATING
 - 8: FULL GOLD FLASH
 - 2: NICKEL + GOLD FLASH
 - 6: FULL Tin
- POLARIZATION
 - A: W/
 - B: W/O
- STRAIN RELIEF
 - N: W/O
- No. OF CONTACTS
 - 10 12 14 16 20 26 30 34
 - 40 44 50 60 68 80 100
- SERIES No. DS1017

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 1.27mm WITH 0.635mm FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1017-01 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1017-01-XXXX						

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 12/08/06'
B	整理图纸	YCH 07/27/11'	~	

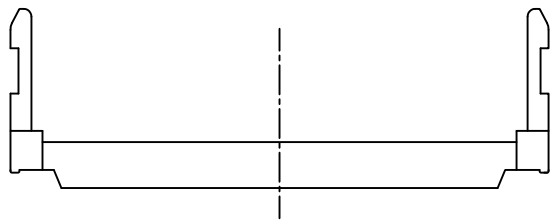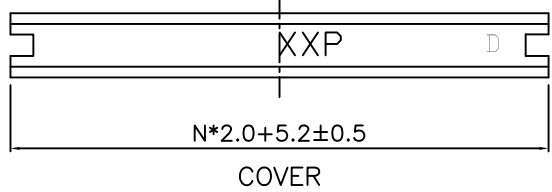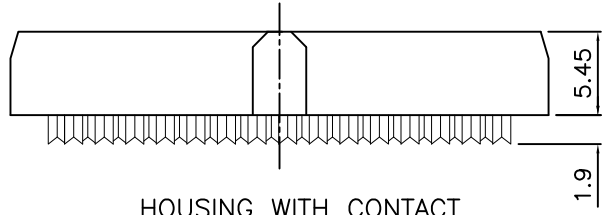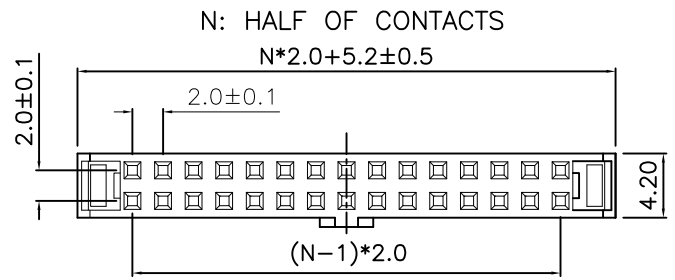

NOTES:

- MATERIAL
 - INSULATOR: THERMOPLASTIC (UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE RANGE: -40~+105°C.
 - CONTACT RESISTANCE: 20mΩ max.
 - INSULATION RESISTANCE: 1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.

3. PART NUMBER: DS1017


DS1017- X X X X X

- HOUSING COLOR
 - G: GRAY
 - B: BLACK
 - L: BLUE
- CONTACT PLATING
 - 8: FULL GOLD FLASH
 - 6: FULL TIN
 - 2: NICKEL+GOLD FLASH
- POLARIZATION
 - A: W/
 - B: W/O
- STRAIN RELIEF
 - M: W/
 - N: W/O
- No. OF CONTACTS
 - 10 12 16 20 22 24 26
 - 34 36 40 44 50 56 68

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°




PROJECTION	TITLE
UNITS	IDC SOCKET PITCH 2.0mm WITH 1.0mm FLAT CABLE
SHEET SIZE	SERIES DS1017 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1017-XXXXX




晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/20/05'		



HOUSING WITH CONTACT

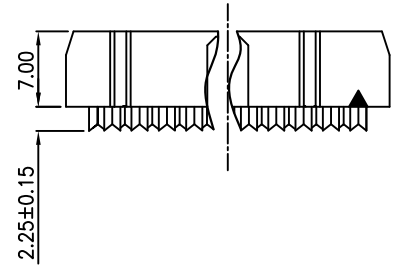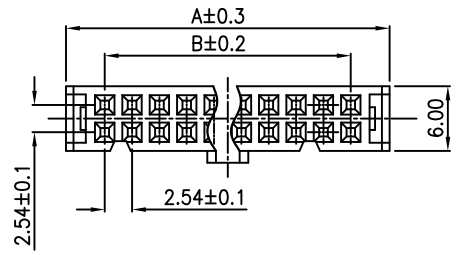

UPPER COVER




TOP COVER

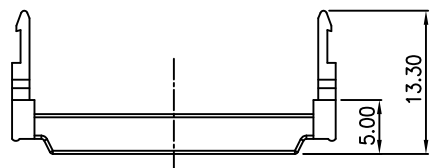

Position	Dimension	
	A	B
06	12.28	5.08
08	14.82	7.62
10	17.36	10.16
12	19.90	12.70
14	22.44	15.24
16	24.98	17.78
20	30.06	22.86
24	35.14	27.94
26	37.68	30.48
30	42.76	25.56
34	47.84	40.64
40	55.46	48.26
50	68.16	60.96
60	80.86	73.66
64	85.94	78.74

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1016
- PRODUCT NUMBER CODE:






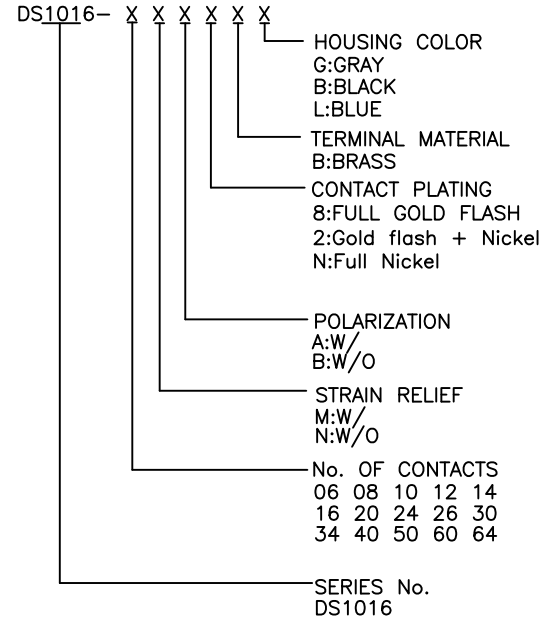


GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE		1:1	SHEET 1 OF 1
DRAWING NO.		C-DS1016-XXXXXX	

PROJECTION		TITLE	I.D.CSOCKET PITCH 2.54mm
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1016 SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/06/08'		

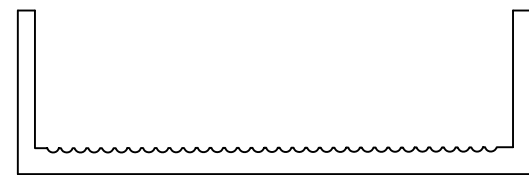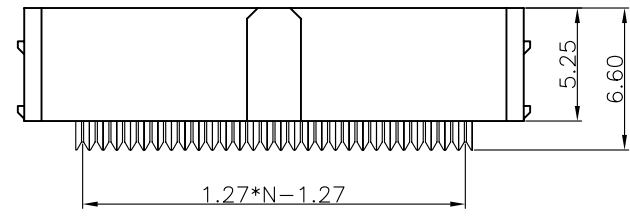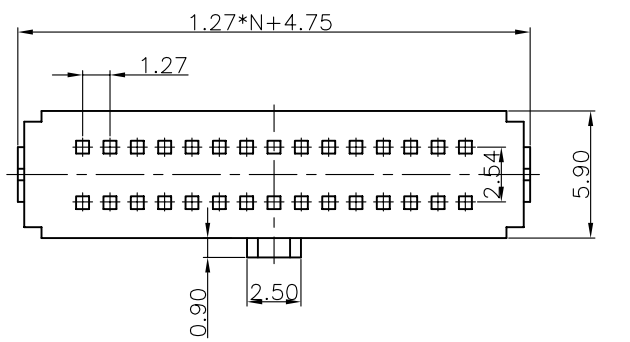

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE RANGE: -40°C~+105°C.
- PART NUMBER: DS1016-01
- PRODUCT NUMBER CODE: DS1016-01- X X X X

HOUSING COLOR
 A:GRAY
 B:BLACK
 L:BLUE

CONTACT PLATING
 2:NICKEL + GOLD FLASH
 6:FULL TIN
 8:FULL GOLD FLASH

POLARIZATION SUPPORT
 A:W/
 B:W/O

No. OF CONTACTS
 10 20 26 30
 34 40 50 60
 68 70 80 90
 100

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 1.27*2.54mm	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1016-01 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1016-01-XXXX						