

Data Sheet

Customer:

Product: TO-220 Power Resistor – TR50-H Series

Size.: 50W

Issued Date: 21-Sep-22

Edition: REV.A8



VIKING TECH CORPORATION
光頤科技股份有限公司
No.70, Guangfu N. Rd., Hukou
Township, Hsinchu County
303, Taiwan (R.O.C)

TEL:886-3-5972931
FAX:886-3-5972935•886-3-5973494
E-mail:sales@viking.com.tw

VIKING TECH CORPORATION KAOHSIUNG BRANCH
光頤科技股份有限公司高雄分公司
No.248-3, Sin-Sheng Rd., Cian-Jhen Dist., Kaohsiung,
806, Taiwan

TEL:886-7-8217999
FAX:886-7-8228229
E-mail:sales@viking.com.tw


VIKING ELECTRONICS (WUXI) CO., LTD.
光頤電子(無錫)有限公司
No.22 Xixia Road, Machinery & Industry Park,
National Hi-Tech Industrial Development Zone
of Wuxi, Wuxi, Jiangsu Province, China
Zip Code:214028
TEL:86-510-85203339
FAX:86-510-85203667•86-510-85203977
E-mail:china@viking.com.tw

Produced by (QC)	Checked (QC)	Approved by (QC)	Prepared by (Sales)	Accepted by (Customer)
21-Sep-22	21-Sep-22	21-Sep-22		
<i>Mandy Chen</i>	<i>Ben Chang</i>	<i>Ben Chang</i>		

TO-220 Power Resistor

■ Features


- 50 watts at 25°C case temperature heat sink mounted
- TO-220 style power package
- Single screw mounting to heat sink
- Molded case for protection and easy to mount
- Electrically isolated case
- Non-Inductive design




■ Applications

- Gate Resistors in Power Supplies
- Snubbers
- Load and Dumping in Resistors in CRT Monitors
- Automated Machine Controller
- Terminal Resistance in RF Power Amplifiers
- Low Energy Pulse Loading
- UPS
- Voltage Regulation

■ Derating Curve

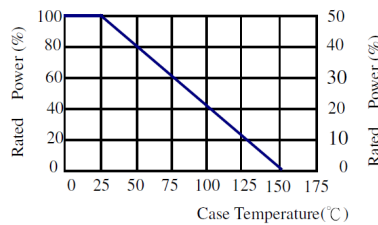

■ Construction

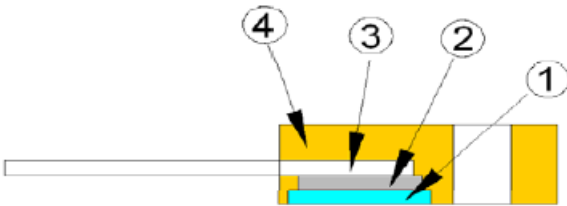


① Alumina Substrate	③ Lead
② Resistor Layer	④ Molding

■ Dimensions

Unit : mm


Type	Weight (g) (1000pcs)	Packaging
		Tube
TR50	1290	50pcs

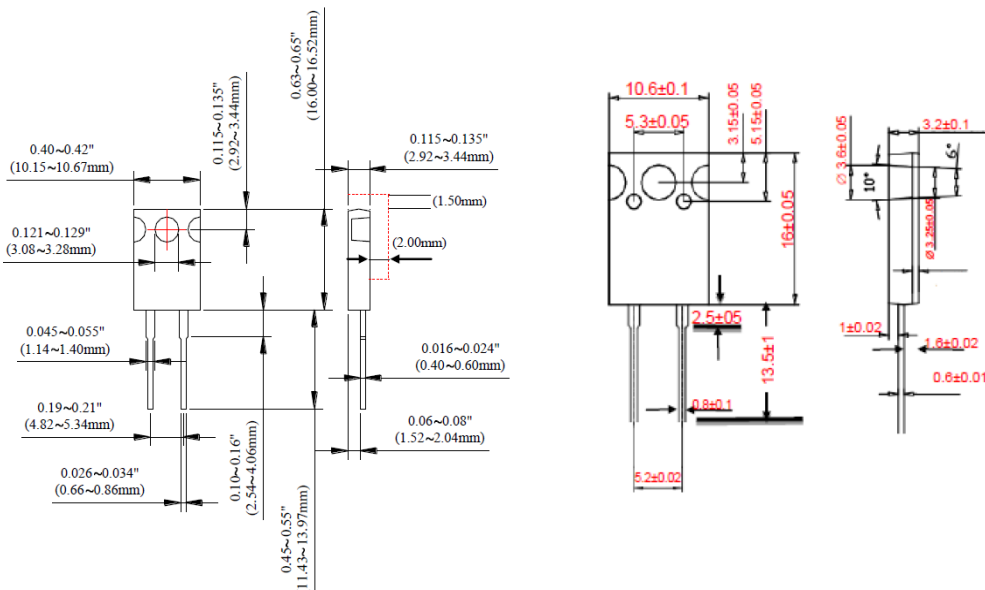

■ Two styles (no round holes and 2 small round holes) side by side.

TO-220 Power Resistor

Part Numbering

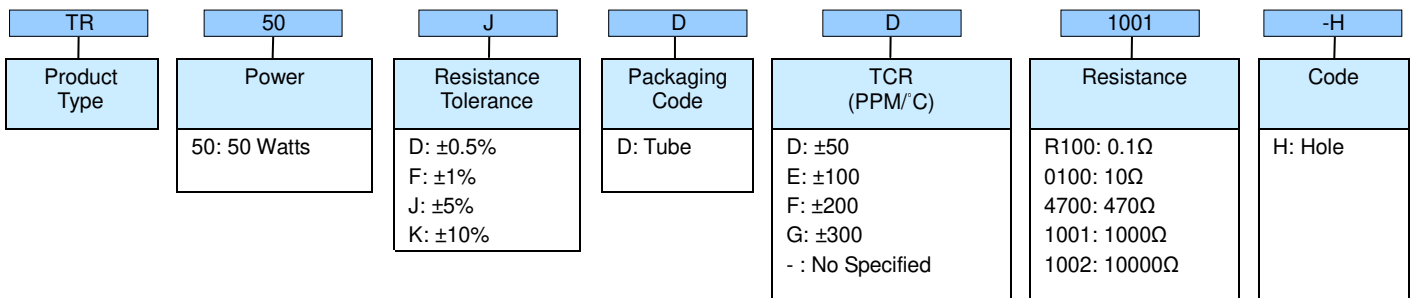

Electrical Characteristics Specifications

Type	Item	Resistance Range				TCR (PPM/°C)
		±0.5%	±1%	±5%	±10%	
TR50	-	-	0.05Ω - 0.1Ω		No Specified	
	-	≧ 0.1Ω - 1Ω			No Specified	
	-	≧ 1Ω - 5Ω			±100 ±200 ±300	
	≧ 10Ω - 100KΩ				±50 ±100 ±200	
	≧ 5Ω - 10Ω				±100 ±200 ±300	

- Operating Voltage: 350V Max.
- Dielectric Strength: 1800VAC
- Insulation Resistance: 10GΩ min.
- Operating Temperature Range: -65°C to +150°C

Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ΔR taken at +105°C
Short Time Overload	ΔR±0.3%	2 times rated power with applied voltage not to exceed 1.5 times maximum continuous operating voltage for 5 seconds
Load Life	ΔR±1.0%	2,000 hours at rated power
Damp Heat with Load	ΔR±0.5%	40±2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Solderability	90% min. coverage	245±5°C for 3 seconds
Thermal Shock	ΔR±0.3%	-65°C ~150°C, 100 cycles
Terminal Strength	ΔR±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	ΔR±0.2%	20g peak

- Lead Material: Tinned Copper
- Maximum Torque: 0.9N-m
- When in Free Air at 25°C, the TR50-H is Rated for 3W.
- The Case Temperature is to be used for the Definition of the Applied Power Limit.
- The Case Temperature Measurement Must be Made with a Thermocouple Contacting the Center of the Component Mounted on the Designed Heat Sink.
- Thermal Grease Should be Applied Properly.
- Storage Temperature: 25±5°C; Humidity: < 75%RH